

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917014

Luminaire Tested: DFN2DIP-PN4F0-100D070US930-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917014
REPORT IS A COMBINATION OF REPORTS P899676 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D070US930-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11980.8 lumens
Efficiency: N/A
Efficacy: 78.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 153.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917014

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US930-RLLFLL

Luminous Intensity Polar Plot

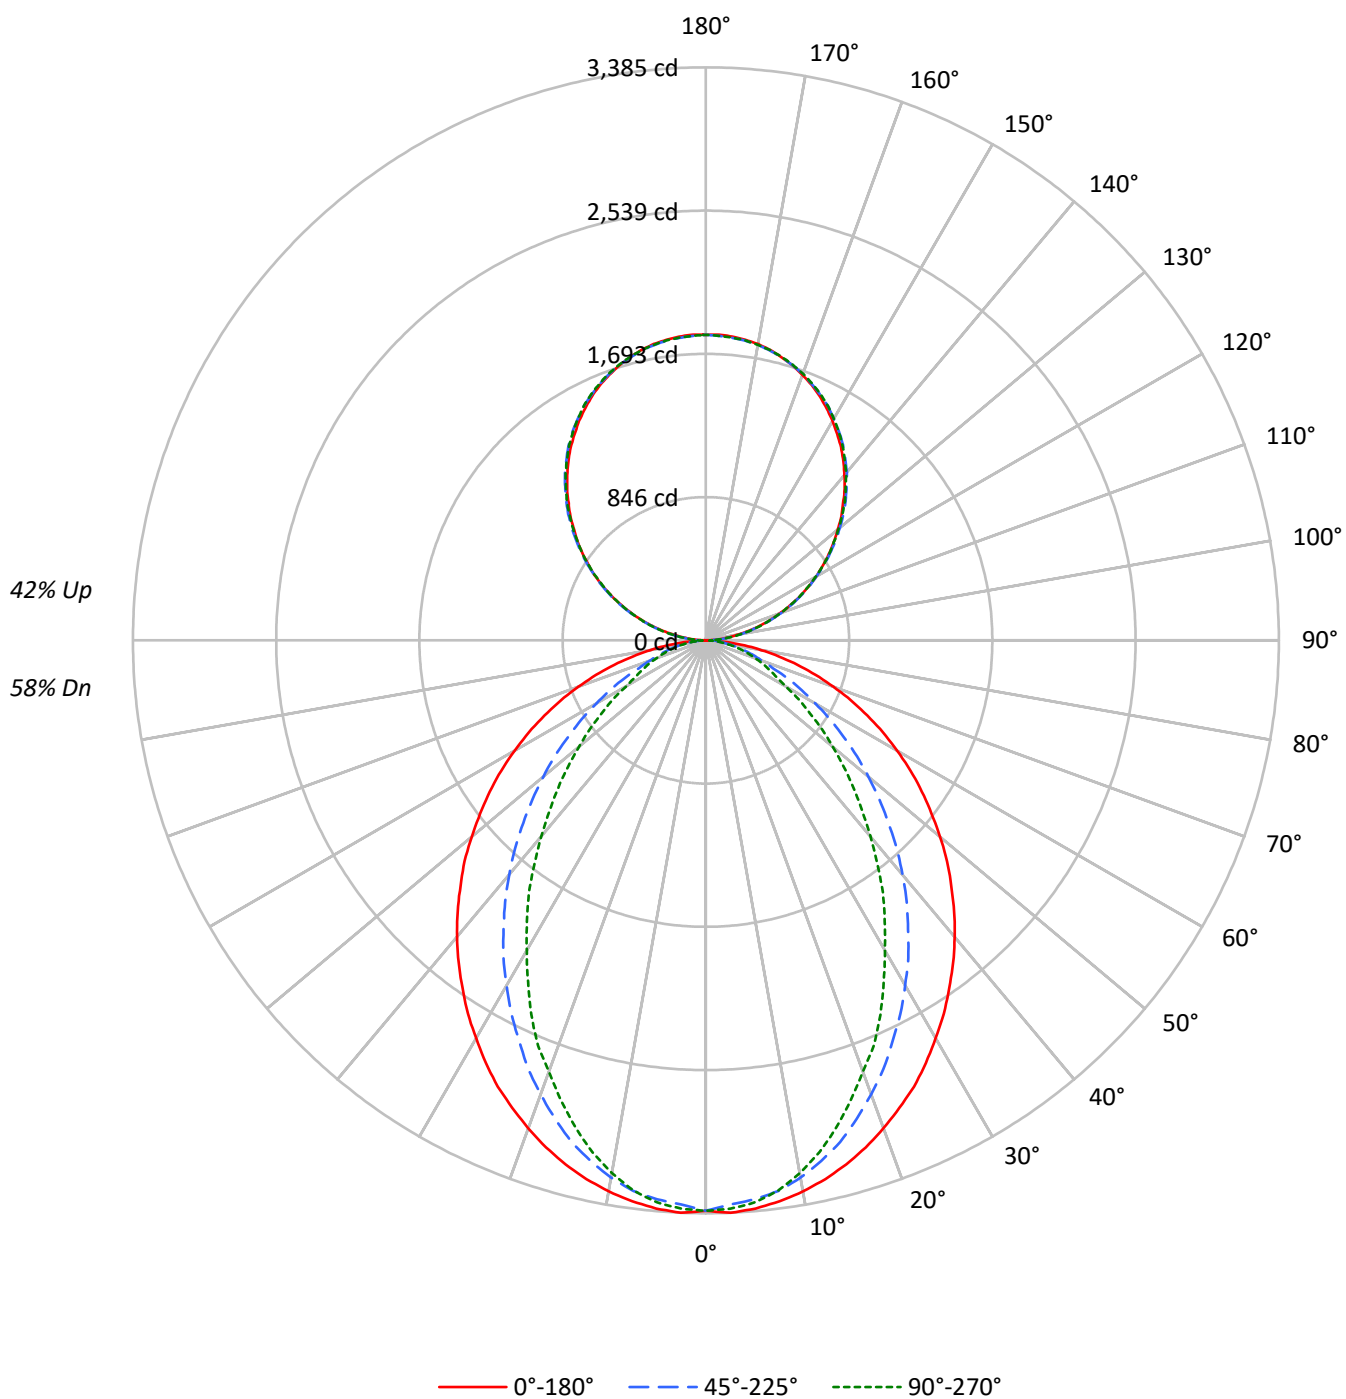

TEST NUMBER: P917014

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US930-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	102	102	102	102	88	88	88	75	75	75	63	63	63
1	100	96	92	89	93	90	86	83	78	75	73	67	65	64	57	56	55
2	92	84	79	74	85	79	74	69	69	65	62	59	57	54	51	49	47
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	43	41
4	77	67	59	53	72	62	56	50	55	49	45	48	44	40	41	38	35
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31
6	66	54	46	40	61	51	43	38	45	39	35	39	35	31	34	31	28
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	28	25
8	57	44	37	32	53	42	35	30	37	32	28	33	28	25	29	25	23
9	53	41	33	28	49	39	32	27	34	29	25	30	26	23	27	23	20
10	49	38	30	26	46	36	29	25	32	26	23	28	24	21	25	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2460	2460	2460
5°	2464	2421	2437
10°	2439	2374	2358
15°	2406	2296	2236
20°	2361	2188	2086
25°	2316	2067	1941
30°	2255	1943	1757
35°	2195	1809	1595
40°	2134	1671	1410
45°	2063	1518	1242
50°	1990	1364	1077
55°	1914	1198	920
60°	1825	1025	758
65°	1723	849	682
70°	1600	685	618
75°	1445	605	563
80°	1221	509	490
85°	850	341	372

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2063 cd/sqm

TEST NUMBER: P917014

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US930-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	315.8	2.6
10°-20°	866.9	7.2
20°-30°	1217.2	10.2
30°-40°	1326.8	11.1
40°-50°	1219.5	10.2
50°-60°	957.7	8.0
60°-70°	623.4	5.2
70°-80°	320.9	2.7
80°-90°	87.0	0.7
90°-100°	111.7	0.9
100°-110°	354.9	3.0
110°-120°	607.3	5.1
120°-130°	798.7	6.7
130°-140°	896.5	7.5
140°-150°	879.1	7.3
150°-160°	737.5	6.2
160°-170°	489.1	4.1
170°-180°	170.9	1.4
0°-30°	2399.9	20.0
0°-40°	3726.7	31.1
0°-60°	5903.9	49.3
0°-90°	6935.2	57.9
90°-120°	1073.9	9.0
90°-150°	3648.2	30.5
90°-180°	5046.0	42.1
0°-180°	11980.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3370	3370	3370	3370	3370	
5°	3370	3354	3315	3342	3333	320
15°	3205	3171	3068	3010	2979	903
25°	2909	2812	2610	2485	2440	1338
35°	2507	2351	2083	1891	1823	1569
45°	2049	1845	1525	1308	1235	1583
55°	1558	1320	991	808	750	1392
65°	1052	805	531	427	418	1043
75°	561	348	244	223	220	593
85°	131	67	58	58	58	150
90°	2	20	53	50	52	12
95°	79	95	97	97	95	88
105°	328	332	335	338	338	346
115°	609	618	616	614	609	603
125°	886	900	896	891	889	792
135°	1147	1163	1167	1165	1161	886
145°	1392	1403	1412	1413	1407	870
155°	1592	1596	1601	1608	1604	733
165°	1731	1730	1730	1741	1733	488
175°	1802	1797	1794	1805	1796	171
180°	1805	1805	1805	1805	1805	

TEST NUMBER: P917014

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US930-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3369.6	3369.6	3369.6	3369.6	3369.6
2.5°	3384.8	3369.6	3336.0	3366.7	3360.6
5°	3369.6	3354.4	3314.6	3342.2	3333.0
7.5°	3342.2	3324.0	3281.2	3293.2	3278.1
10°	3305.5	3284.2	3223.4	3214.0	3195.9
12.5°	3260.0	3232.4	3149.9	3131.8	3098.1
15°	3204.9	3171.3	3067.7	3009.8	2979.4
17.5°	3140.9	3092.0	2963.9	2896.9	2848.1
20°	3067.7	3006.6	2854.2	2778.2	2710.9
22.5°	2988.5	2918.3	2741.3	2637.8	2592.2
25°	2909.2	2811.6	2610.3	2485.4	2439.5
27.5°	2814.7	2710.9	2488.3	2345.0	2274.8
30°	2714.1	2597.9	2354.0	2198.8	2116.3
32.5°	2616.5	2476.0	2226.3	2043.1	1966.7
35°	2506.7	2351.2	2082.9	1890.8	1823.4
37.5°	2400.0	2232.0	1948.6	1738.1	1662.0
40°	2287.1	2104.3	1808.2	1591.8	1512.5
42.5°	2171.2	1976.1	1668.2	1442.3	1366.3
45°	2049.3	1844.8	1524.9	1308.1	1234.9
47.5°	1933.5	1717.0	1387.6	1170.8	1103.9
50°	1805.3	1588.9	1253.4	1042.8	979.0
52.5°	1680.1	1451.4	1125.3	924.0	866.1
55°	1558.1	1320.4	991.0	808.2	750.2
57.5°	1433.3	1189.3	872.3	701.4	652.6
60°	1305.1	1061.2	747.1	591.7	542.9
62.5°	1180.2	936.3	640.3	494.1	469.8
65°	1052.1	804.9	530.6	427.1	417.7
67.5°	930.2	683.0	427.1	375.0	365.9
70°	802.0	564.3	353.6	323.2	311.0
72.5°	680.0	454.2	295.7	271.4	265.3
75°	561.0	347.5	243.9	222.6	219.6
77.5°	442.3	246.9	192.2	179.9	173.7
80°	332.2	177.0	146.3	134.3	134.3
82.5°	231.6	119.0	100.6	94.5	94.5
85°	131.0	66.9	57.9	57.9	57.9
87.5°	48.8	24.3	24.3	21.4	21.4
90°	1.6	19.6	53.3	50.1	51.7
92.5°	33.8	45.7	47.4	49.0	49.0
95°	79.4	94.7	97.4	97.4	94.7
97.5°	132.2	146.3	152.4	152.4	152.4
100°	193.1	205.7	210.0	210.0	208.4
102.5°	257.4	266.6	272.6	274.3	272.6
105°	327.6	331.9	335.2	337.9	337.9
107.5°	397.2	403.7	403.7	404.9	397.2
110°	464.7	473.4	473.4	473.4	469.0

TEST NUMBER: P917014

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US930-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	537.6	546.9	545.3	540.9	537.6
115°	609.4	618.2	615.5	613.8	609.4
117.5°	680.7	692.7	685.1	680.7	676.4
120°	752.5	764.5	752.5	752.5	747.6
122.5°	817.8	833.1	825.5	821.1	817.8
125°	886.4	900.0	895.7	890.8	889.2
127.5°	953.3	970.2	964.3	957.7	953.3
130°	1015.9	1035.5	1032.8	1029.6	1023.5
132.5°	1086.1	1101.4	1102.4	1094.9	1090.5
135°	1146.6	1163.3	1166.7	1165.0	1160.7
137.5°	1214.0	1227.6	1230.3	1229.2	1222.7
140°	1273.3	1286.9	1294.5	1294.5	1288.6
142.5°	1334.2	1347.9	1352.2	1353.8	1347.9
145°	1392.0	1402.8	1411.5	1413.2	1407.2
147.5°	1443.6	1457.3	1463.8	1466.5	1460.5
150°	1497.0	1506.2	1512.2	1517.1	1512.2
152.5°	1544.3	1553.6	1561.1	1567.2	1561.1
155°	1591.6	1595.9	1600.9	1608.5	1603.6
157.5°	1632.5	1635.7	1638.4	1649.3	1641.7
160°	1668.9	1672.2	1673.8	1683.0	1676.5
162.5°	1702.7	1702.7	1704.3	1714.6	1707.0
165°	1731.4	1729.8	1729.8	1740.7	1733.1
167.5°	1757.6	1752.7	1752.7	1763.6	1756.0
170°	1777.2	1772.9	1771.2	1782.1	1772.9
172.5°	1790.8	1786.4	1784.8	1795.7	1786.4
175°	1801.6	1797.3	1794.1	1804.9	1795.7
177.5°	1807.7	1803.3	1800.0	1809.3	1800.0
180°	1804.9	1804.9	1804.9	1804.9	1804.9



TEST NUMBER: P917014

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US930-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.99	11.89	11.88	12.79	13.95	6.95	7.85	7.84	8.76	9.92
	3H	12.67	13.48	13.58	14.39	15.58	8.15	8.95	9.05	9.87	11.05
	4H	13.29	14.04	14.21	14.97	16.16	8.60	9.36	9.52	10.28	11.47
	6H	13.71	14.41	14.65	15.34	16.55	8.92	9.62	9.86	10.55	11.76
	8H	13.84	14.51	14.78	15.45	16.66	9.02	9.68	9.96	10.63	11.83
	12H	13.91	14.54	14.85	15.48	16.71	9.06	9.70	10.01	10.64	11.86
4H	2H	11.01	11.77	11.94	12.70	13.89	7.56	8.32	8.48	9.24	10.43
	3H	12.85	13.48	13.79	14.44	15.64	8.91	9.54	9.85	10.50	11.70
	4H	13.55	14.12	14.49	15.07	16.30	9.47	10.04	10.41	10.99	12.22
	6H	14.07	14.56	15.03	15.54	16.77	9.89	10.38	10.85	11.36	12.59
	8H	14.25	14.71	15.21	15.68	16.92	10.02	10.48	10.98	11.45	12.69
	12H	14.35	14.76	15.33	15.75	17.00	10.09	10.50	11.07	11.49	12.74
8H	4H	13.52	13.98	14.48	14.95	16.19	9.75	10.21	10.71	11.18	12.43
	6H	14.09	14.47	15.08	15.48	16.73	10.27	10.66	11.26	11.66	12.91
	8H	14.31	14.65	15.31	15.65	16.91	10.47	10.80	11.46	11.80	13.06
	12H	14.46	14.75	15.45	15.74	17.05	10.59	10.89	11.59	11.88	13.19
12H	4H	13.48	13.89	14.46	14.88	16.13	9.76	10.18	10.74	11.16	12.41
	6H	14.07	14.41	15.06	15.40	16.66	10.32	10.66	11.32	11.66	12.92
	8H	14.29	14.59	15.29	15.58	16.89	10.54	10.84	11.54	11.83	13.14