

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917051

Luminaire Tested: DFN2DIP-PN4F0-110D070US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917051
REPORT IS A COMBINATION OF REPORTS P901198 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-110D070US930-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13273.1 lumens
Efficiency: N/A
Efficacy: 79.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 166.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917051

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US930-RLLONL

Luminous Intensity Polar Plot

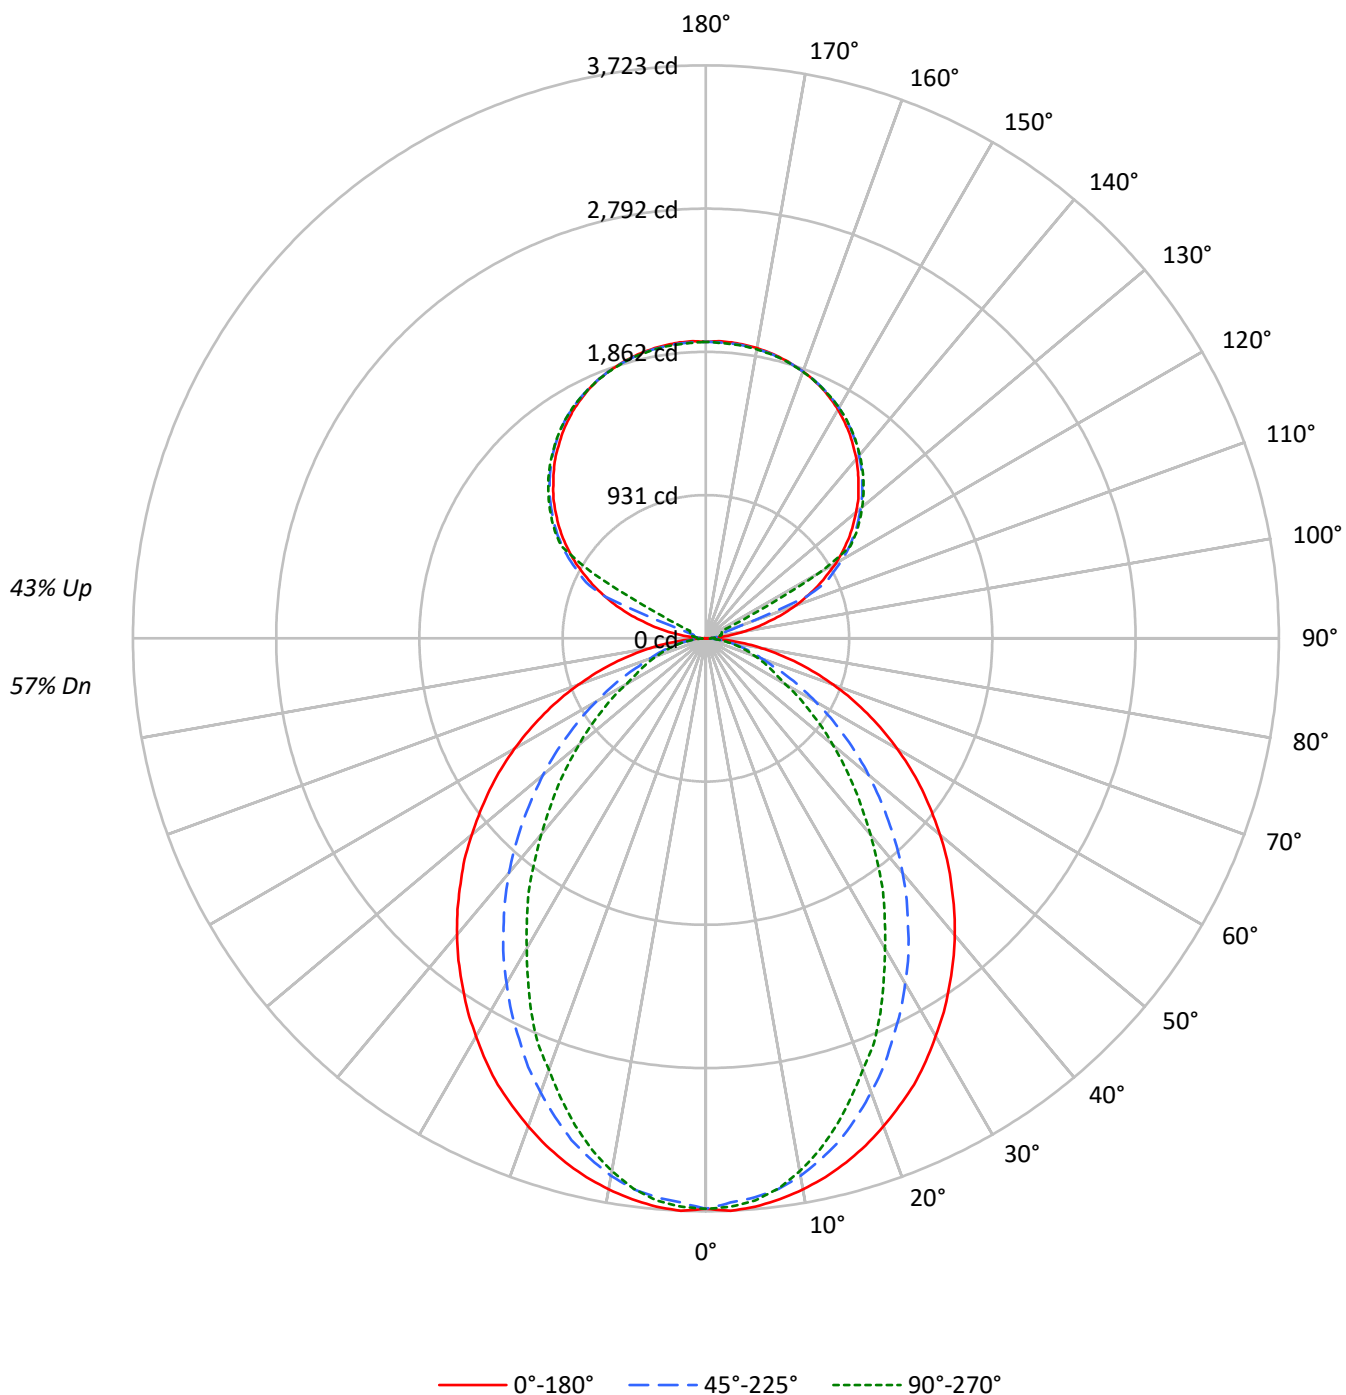

TEST NUMBER: P917051

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	75	75	75	63	63	63
1	100	96	92	89	93	89	86	83	78	75	73	67	65	63	57	55	54
2	92	84	78	73	85	79	74	69	69	65	61	59	56	54	50	48	47
3	84	75	68	62	78	70	64	59	61	56	52	53	49	46	45	43	40
4	77	66	59	53	72	62	56	50	55	49	45	47	43	40	41	38	35
5	71	60	52	46	66	56	49	44	49	44	39	43	39	35	37	34	31
6	66	54	46	40	61	51	43	38	45	39	35	39	35	31	34	30	28
7	61	49	41	35	57	46	39	34	41	35	31	36	31	28	31	27	25
8	57	44	37	32	53	42	35	30	37	32	28	33	28	25	29	25	22
9	53	41	33	28	49	38	32	27	34	29	25	30	26	23	27	23	20
10	49	37	30	26	46	35	29	25	32	26	23	28	24	21	25	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2706	2706	2706
5°	2710	2663	2680
10°	2683	2611	2594
15°	2646	2525	2459
20°	2597	2407	2294
25°	2547	2274	2135
30°	2480	2137	1932
35°	2414	1990	1755
40°	2347	1839	1551
45°	2269	1670	1366
50°	2189	1500	1185
55°	2105	1318	1012
60°	2008	1128	833
65°	1896	934	751
70°	1760	754	680
75°	1590	665	620
80°	1343	559	539
85°	935	375	409

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2269 cd/sqm

TEST NUMBER: P917051

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US930-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	347.4	2.6
10°-20°	953.6	7.2
20°-30°	1338.9	10.1
30°-40°	1459.5	11.0
40°-50°	1341.4	10.1
50°-60°	1053.5	7.9
60°-70°	685.7	5.2
70°-80°	353.0	2.7
80°-90°	93.5	0.7
90°-100°	63.5	0.5
100°-110°	236.8	1.8
110°-120°	627.9	4.7
120°-130°	1041.5	7.8
130°-140°	1106.3	8.3
140°-150°	1028.1	7.7
150°-160°	826.6	6.2
160°-170°	532.6	4.0
170°-180°	183.3	1.4
0°-30°	2639.9	19.9
0°-40°	4099.4	30.9
0°-60°	6494.2	48.9
0°-90°	7626.4	57.5
90°-120°	928.2	7.0
90°-150°	4104.1	30.9
90°-180°	5647.0	42.5
0°-180°	13273.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3707	3707	3707	3707	3707	
5°	3707	3690	3646	3676	3666	351
15°	3525	3488	3374	3311	3277	993
25°	3200	3093	2871	2734	2683	1472
35°	2757	2586	2291	2080	2006	1726
45°	2254	2029	1677	1439	1358	1741
55°	1714	1452	1090	889	825	1532
65°	1157	885	584	470	459	1147
75°	617	382	268	245	242	653
85°	144	74	64	64	64	165
90°	1	17	28	35	38	12
95°	90	44	54	61	60	107
105°	424	466	85	100	106	453
115°	801	825	860	215	114	789
125°	1133	1151	1178	1188	1192	1010
135°	1402	1424	1437	1451	1448	1083
145°	1626	1625	1649	1658	1652	1017
155°	1791	1778	1795	1803	1792	825
165°	1887	1879	1883	1893	1883	533
175°	1930	1920	1923	1933	1919	184
180°	1926	1926	1926	1926	1926	

TEST NUMBER: P917051

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3706.6	3706.6	3706.6	3706.6	3706.6
2.5°	3723.3	3706.6	3669.6	3703.4	3696.6
5°	3706.6	3689.9	3646.1	3676.3	3666.4
7.5°	3676.3	3656.4	3609.4	3622.6	3605.8
10°	3636.1	3612.6	3545.7	3535.4	3515.5
12.5°	3585.9	3555.7	3464.9	3445.0	3407.9
15°	3525.4	3488.4	3374.5	3310.8	3277.3
17.5°	3455.0	3401.3	3260.3	3186.6	3132.9
20°	3374.5	3307.3	3139.6	3056.0	2982.0
22.5°	3287.4	3210.1	3015.5	2901.6	2851.3
25°	3200.1	3092.7	2871.3	2733.9	2683.4
27.5°	3096.3	2982.0	2737.1	2579.4	2502.2
30°	2985.5	2857.8	2589.5	2418.6	2327.8
32.5°	2878.1	2723.6	2448.8	2247.5	2163.5
35°	2757.4	2586.2	2291.2	2079.8	2005.8
37.5°	2640.0	2455.3	2143.5	1911.8	1828.2
40°	2515.8	2314.7	1989.1	1750.9	1663.8
42.5°	2388.3	2173.7	1835.0	1586.6	1502.9
45°	2254.2	2029.3	1677.3	1438.8	1358.4
47.5°	2126.8	1888.7	1526.4	1287.9	1214.3
50°	1985.8	1747.8	1378.8	1147.0	1076.9
52.5°	1848.1	1596.5	1237.8	1016.4	952.7
55°	1713.9	1452.4	1090.1	889.0	825.3
57.5°	1576.6	1308.2	959.4	771.6	717.8
60°	1435.7	1167.3	821.7	650.9	597.2
62.5°	1298.3	1030.0	704.3	543.5	516.7
65°	1157.3	885.4	583.7	469.8	459.4
67.5°	1023.2	751.3	469.8	412.5	402.5
70°	882.2	620.7	389.0	355.6	342.0
72.5°	748.0	499.7	325.3	298.6	291.8
75°	617.1	382.2	268.3	244.8	241.7
77.5°	486.5	271.6	211.4	197.9	191.1
80°	365.5	194.7	160.9	147.7	147.7
82.5°	254.8	130.9	110.7	104.0	104.0
85°	144.1	73.7	63.7	63.7	63.7
87.5°	53.7	26.7	26.7	23.5	23.5
90°	1.3	16.7	27.8	34.9	37.6
92.5°	34.9	29.3	33.4	36.3	37.6
95°	90.5	44.5	54.3	61.4	59.9
97.5°	163.0	48.8	71.0	75.3	76.6
100°	246.8	55.8	79.4	90.5	93.4
102.5°	338.6	336.0	82.3	97.5	101.7
105°	423.7	465.5	85.0	100.3	105.9
107.5°	522.6	557.4	87.9	103.1	108.8
110°	617.5	646.6	243.9	104.6	110.1

TEST NUMBER: P917051

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	706.7	731.6	708.0	107.2	111.5
115°	801.4	825.0	859.9	214.7	114.4
117.5°	883.6	911.4	935.2	735.8	370.7
120°	975.6	996.5	1021.7	1038.4	850.2
122.5°	1053.5	1075.9	1103.9	1112.1	1113.6
125°	1133.0	1151.2	1177.7	1187.5	1191.6
127.5°	1205.5	1225.0	1246.0	1260.0	1261.3
130°	1273.8	1296.2	1311.4	1326.8	1325.5
132.5°	1343.5	1361.7	1377.0	1389.5	1388.2
135°	1402.1	1424.4	1436.9	1450.9	1448.1
137.5°	1463.3	1480.1	1494.1	1508.1	1503.9
140°	1523.2	1534.5	1549.7	1562.3	1555.3
142.5°	1573.5	1583.3	1601.3	1612.4	1605.5
145°	1626.5	1625.1	1648.7	1658.5	1651.5
147.5°	1672.3	1668.3	1691.9	1698.8	1693.4
150°	1717.0	1707.3	1729.7	1737.9	1731.0
152.5°	1754.6	1743.5	1764.4	1772.8	1763.1
155°	1790.9	1778.4	1795.1	1803.4	1792.4
157.5°	1820.2	1809.1	1821.6	1831.4	1820.2
160°	1845.3	1836.9	1845.3	1853.6	1843.8
162.5°	1867.5	1859.2	1866.1	1875.9	1863.4
165°	1887.0	1878.8	1882.8	1892.6	1882.8
167.5°	1902.4	1893.9	1898.3	1908.0	1895.5
170°	1915.0	1906.6	1909.3	1919.1	1906.6
172.5°	1923.3	1915.0	1917.8	1927.5	1915.0
175°	1930.2	1920.4	1923.3	1933.0	1919.1
177.5°	1933.0	1923.3	1924.8	1934.5	1921.9
180°	1926.1	1926.1	1926.1	1926.1	1926.1



TEST NUMBER: P917051

CATALOG NUMBER: DFN2DIP-PN4F0-110D070US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.28	12.18	12.18	13.09	14.25	7.25	8.14	8.14	9.05	10.22
	3H	12.97	13.77	13.88	14.69	15.88	8.44	9.24	9.35	10.16	11.35
	4H	13.58	14.34	14.51	15.26	16.46	8.90	9.65	9.82	10.58	11.78
	6H	14.01	14.70	14.94	15.64	16.85	9.22	9.92	10.16	10.85	12.06
	8H	14.14	14.80	15.08	15.75	16.96	9.31	9.97	10.26	10.93	12.13
	12H	14.20	14.83	15.15	15.78	17.01	9.36	9.99	10.31	10.93	12.17
4H	2H	11.31	12.06	12.24	12.99	14.19	7.85	8.61	8.78	9.53	10.73
	3H	13.15	13.77	14.09	14.73	15.94	9.21	9.84	10.15	10.79	12.01
	4H	13.84	14.42	14.79	15.37	16.61	9.76	10.33	10.71	11.28	12.52
	6H	14.36	14.86	15.33	15.83	17.07	10.18	10.68	11.15	11.65	12.89
	8H	14.54	15.00	15.51	15.97	17.22	10.31	10.77	11.28	11.74	13.00
	12H	14.64	15.06	15.63	16.04	17.30	10.38	10.80	11.37	11.78	13.04
8H	4H	13.82	14.28	14.78	15.25	16.50	10.05	10.51	11.01	11.48	12.73
	6H	14.39	14.77	15.38	15.78	17.03	10.57	10.95	11.56	11.96	13.21
	8H	14.61	14.94	15.61	15.94	17.21	10.76	11.10	11.76	12.10	13.36
	12H	14.75	15.04	15.75	16.04	17.35	10.88	11.18	11.89	12.17	13.49
12H	4H	13.77	14.18	14.75	15.17	16.43	10.06	10.47	11.04	11.46	12.71
	6H	14.36	14.70	15.36	15.70	16.97	10.62	10.95	11.62	11.95	13.22
	8H	14.59	14.88	15.59	15.88	17.19	10.83	11.13	11.84	12.12	13.44