

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917091

Luminaire Tested: DFN2DIP-PN4F0-120D080US930-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917091
REPORT IS A COMBINATION OF REPORTS P901218 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D080US930-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14773.2 lumens
Efficiency: N/A
Efficacy: 80.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 184.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917091

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US930-RLLONL

Luminous Intensity Polar Plot

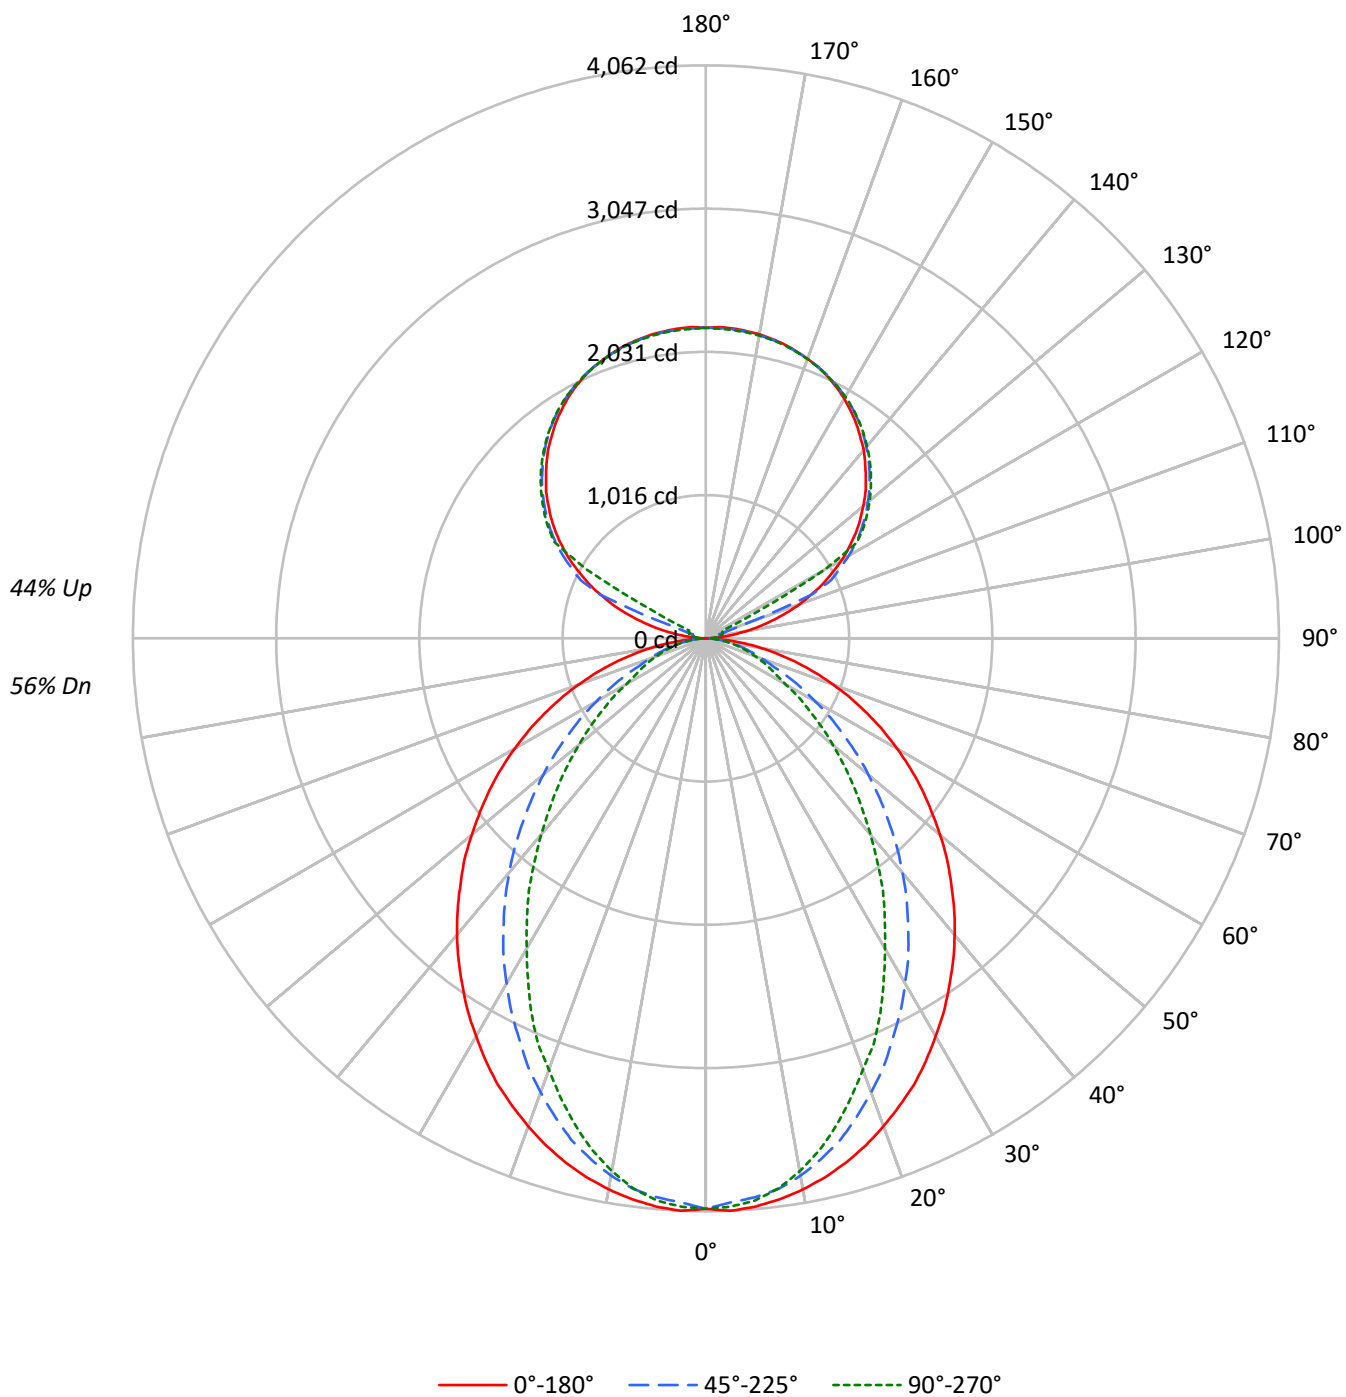

TEST NUMBER: P917091

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US930-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62
1	100	96	92	88	93	89	86	83	77	75	72	66	64	63	56	54	53
2	91	84	78	73	85	79	73	69	68	64	61	58	56	53	50	48	46
3	84	74	67	62	78	70	63	58	61	56	52	52	49	46	44	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	51	46	66	56	49	43	49	43	39	42	38	35	36	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	33	30	27
7	61	49	41	35	56	46	39	34	40	35	30	35	31	27	30	27	24
8	56	44	37	31	52	42	35	30	37	31	27	32	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	28	25	30	25	22	26	23	20
10	49	37	30	25	46	35	29	24	31	26	22	28	23	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2952	2952	2952
5°	2956	2905	2924
10°	2927	2849	2829
15°	2887	2755	2683
20°	2833	2625	2503
25°	2779	2480	2329
30°	2706	2331	2108
35°	2634	2171	1914
40°	2561	2006	1692
45°	2476	1822	1490
50°	2388	1636	1293
55°	2296	1438	1104
60°	2190	1230	909
65°	2068	1019	819
70°	1920	823	742
75°	1734	726	676
80°	1465	610	588
85°	1021	410	446

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2476 cd/sqm

TEST NUMBER: P917091

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US930-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	379.0	2.6
10°-20°	1040.3	7.0
20°-30°	1460.6	9.9
30°-40°	1592.1	10.8
40°-50°	1463.4	9.9
50°-60°	1149.2	7.8
60°-70°	748.0	5.1
70°-80°	385.1	2.6
80°-90°	102.2	0.7
90°-100°	72.6	0.5
100°-110°	270.6	1.8
110°-120°	717.6	4.9
120°-130°	1190.2	8.1
130°-140°	1264.3	8.6
140°-150°	1175.0	8.0
150°-160°	944.7	6.4
160°-170°	608.7	4.1
170°-180°	209.5	1.4
0°-30°	2879.9	19.5
0°-40°	4472.0	30.3
0°-60°	7084.6	48.0
0°-90°	8319.9	56.3
90°-120°	1060.8	7.2
90°-150°	4690.4	31.7
90°-180°	6453.0	43.7
0°-180°	14773.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4044	4044	4044	4044	4044	
5°	4044	4025	3978	4010	4000	383
15°	3846	3806	3681	3612	3575	1084
25°	3491	3374	3132	2982	2927	1606
35°	3008	2821	2500	2269	2188	1883
45°	2459	2214	1830	1570	1482	1899
55°	1870	1584	1189	970	900	1671
65°	1263	966	637	512	501	1252
75°	673	417	293	267	264	712
85°	157	80	70	70	70	181
90°	2	19	32	40	43	14
95°	104	51	62	70	68	123
105°	484	532	97	115	121	517
115°	916	943	983	245	131	902
125°	1295	1316	1346	1357	1362	1155
135°	1602	1628	1642	1658	1655	1238
145°	1859	1857	1884	1895	1887	1163
155°	2047	2032	2052	2061	2048	943
165°	2157	2147	2152	2163	2152	609
175°	2206	2195	2198	2209	2193	210
180°	2201	2201	2201	2201	2201	

TEST NUMBER: P917091

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US930-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4043.6	4043.6	4043.6	4043.6	4043.6
2.5°	4061.8	4043.6	4003.2	4040.0	4032.6
5°	4043.6	4025.3	3977.5	4010.5	3999.7
7.5°	4010.5	3988.8	3937.6	3951.9	3933.7
10°	3966.7	3941.1	3868.0	3856.8	3835.1
12.5°	3911.9	3878.9	3779.9	3758.2	3717.8
15°	3845.9	3805.6	3681.3	3611.8	3575.3
17.5°	3769.0	3710.4	3556.7	3476.4	3417.7
20°	3681.3	3607.9	3425.1	3333.8	3253.0
22.5°	3586.2	3502.0	3289.6	3165.3	3110.6
25°	3491.1	3373.8	3132.3	2982.4	2927.3
27.5°	3377.7	3253.0	2985.9	2814.0	2729.7
30°	3257.0	3117.6	2824.8	2638.5	2539.5
32.5°	3139.7	2971.2	2671.5	2451.8	2360.1
35°	3008.1	2821.3	2499.5	2268.9	2188.1
37.5°	2880.0	2678.5	2338.4	2085.6	1994.4
40°	2744.5	2525.1	2169.9	1910.2	1815.0
42.5°	2605.4	2371.4	2001.8	1730.8	1639.6
45°	2459.1	2213.8	1829.8	1569.7	1481.9
47.5°	2320.1	2060.4	1665.2	1405.1	1324.7
50°	2166.4	1906.7	1504.1	1251.3	1174.8
52.5°	2016.2	1741.6	1350.3	1108.8	1039.3
55°	1869.8	1584.5	1189.2	969.8	900.3
57.5°	1719.9	1427.2	1046.7	841.7	783.1
60°	1566.2	1273.4	896.4	710.1	651.5
62.5°	1416.3	1123.6	768.3	592.9	563.7
65°	1262.6	966.0	636.7	512.5	501.2
67.5°	1116.2	819.5	512.5	450.0	439.1
70°	962.5	677.1	424.4	387.8	373.1
72.5°	816.1	545.1	354.8	325.7	318.4
75°	673.2	416.9	292.8	267.1	263.6
77.5°	530.8	296.2	230.6	215.9	208.5
80°	398.8	212.4	175.5	161.1	161.1
82.5°	278.0	142.8	120.7	113.3	113.3
85°	157.3	80.4	69.5	69.5	69.5
87.5°	58.6	29.1	29.1	25.6	25.6
90°	1.5	19.1	31.8	39.9	43.0
92.5°	39.9	33.5	38.2	41.4	43.0
95°	103.5	50.9	62.0	70.2	68.5
97.5°	186.3	55.8	81.1	86.1	87.6
100°	282.0	63.8	90.8	103.5	106.6
102.5°	387.0	383.9	94.0	111.4	116.3
105°	484.2	532.1	97.2	114.6	121.1
107.5°	597.3	637.0	100.4	117.8	124.3
110°	705.7	739.0	278.8	119.5	125.8

TEST NUMBER: P917091

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US930-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	807.6	836.2	809.2	122.5	127.5
115°	915.8	942.9	982.8	245.3	130.7
117.5°	1009.8	1041.6	1068.9	840.9	423.7
120°	1115.0	1138.8	1167.6	1186.7	971.6
122.5°	1204.0	1229.6	1261.6	1271.0	1272.8
125°	1294.9	1315.6	1345.9	1357.1	1361.8
127.5°	1377.7	1400.0	1424.1	1439.9	1441.4
130°	1455.8	1481.3	1498.8	1516.4	1514.8
132.5°	1535.5	1556.2	1573.7	1588.0	1586.5
135°	1602.4	1627.9	1642.1	1658.2	1655.0
137.5°	1672.4	1691.5	1707.6	1723.5	1718.7
140°	1740.8	1753.7	1771.2	1785.5	1777.5
142.5°	1798.4	1809.5	1830.1	1842.8	1834.8
145°	1858.9	1857.2	1884.2	1895.4	1887.4
147.5°	1911.3	1906.6	1933.6	1941.6	1935.3
150°	1962.3	1951.2	1976.7	1986.1	1978.2
152.5°	2005.3	1992.6	2016.4	2026.1	2014.9
155°	2046.7	2032.5	2051.6	2061.1	2048.4
157.5°	2080.2	2067.5	2081.9	2093.0	2080.2
160°	2108.9	2099.3	2108.9	2118.4	2107.2
162.5°	2134.3	2124.8	2132.7	2143.9	2129.6
165°	2156.6	2147.2	2151.9	2163.0	2151.9
167.5°	2174.2	2164.5	2169.4	2180.6	2166.2
170°	2188.6	2178.9	2182.1	2193.3	2178.9
172.5°	2198.0	2188.6	2191.8	2202.9	2188.6
175°	2206.0	2194.8	2198.0	2209.1	2193.3
177.5°	2209.1	2198.0	2199.7	2210.8	2196.5
180°	2201.2	2201.2	2201.2	2201.2	2201.2

TEST NUMBER: P917091

CATALOG NUMBER: DFN2DIP-PN4F0-120D080US930-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.49	12.37	12.39	13.29	14.47	7.45	8.33	8.36	9.26	10.44
	3H	13.17	13.96	14.09	14.89	16.10	8.64	9.43	9.56	10.37	11.57
	4H	13.78	14.53	14.72	15.47	16.68	9.10	9.84	10.03	10.78	12.00
	6H	14.21	14.90	15.16	15.84	17.07	9.42	10.11	10.37	11.05	12.28
	8H	14.34	14.99	15.29	15.95	17.18	9.51	10.17	10.47	11.13	12.35
	12H	14.40	15.03	15.36	15.98	17.23	9.56	10.18	10.52	11.14	12.39
4H	2H	11.51	12.26	12.45	13.19	14.41	8.05	8.80	8.99	9.74	10.95
	3H	13.35	13.97	14.30	14.94	16.16	9.41	10.03	10.36	11.00	12.23
	4H	14.04	14.61	15.00	15.57	16.83	9.96	10.53	10.92	11.49	12.74
	6H	14.56	15.05	15.54	16.04	17.29	10.38	10.87	11.36	11.86	13.11
	8H	14.74	15.20	15.72	16.18	17.44	10.51	10.97	11.49	11.95	13.21
	12H	14.84	15.25	15.84	16.25	17.52	10.58	10.99	11.58	11.99	13.26
8H	4H	14.02	14.47	14.99	15.45	16.72	10.25	10.70	11.22	11.68	12.95
	6H	14.59	14.96	15.59	15.98	17.25	10.77	11.14	11.77	12.16	13.43
	8H	14.81	15.14	15.81	16.15	17.43	10.96	11.29	11.97	12.30	13.58
	12H	14.95	15.24	15.96	16.24	17.57	11.08	11.37	12.09	12.38	13.71
12H	4H	13.97	14.38	14.96	15.38	16.65	10.25	10.66	11.25	11.66	12.93
	6H	14.56	14.89	15.57	15.90	17.19	10.82	11.15	11.83	12.16	13.44
	8H	14.79	15.08	15.80	16.08	17.41	11.03	11.32	12.04	12.33	13.66

END OF REPORT