

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919542

Luminaire Tested: DFN2DIP-PN4F0-040D110US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919542
REPORT IS A COMBINATION OF REPORTS P899736 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D110US935-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11309.2 lumens
Efficiency: N/A
Efficacy: 90.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 125
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919542

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US935-RLLFLL

Luminous Intensity Polar Plot

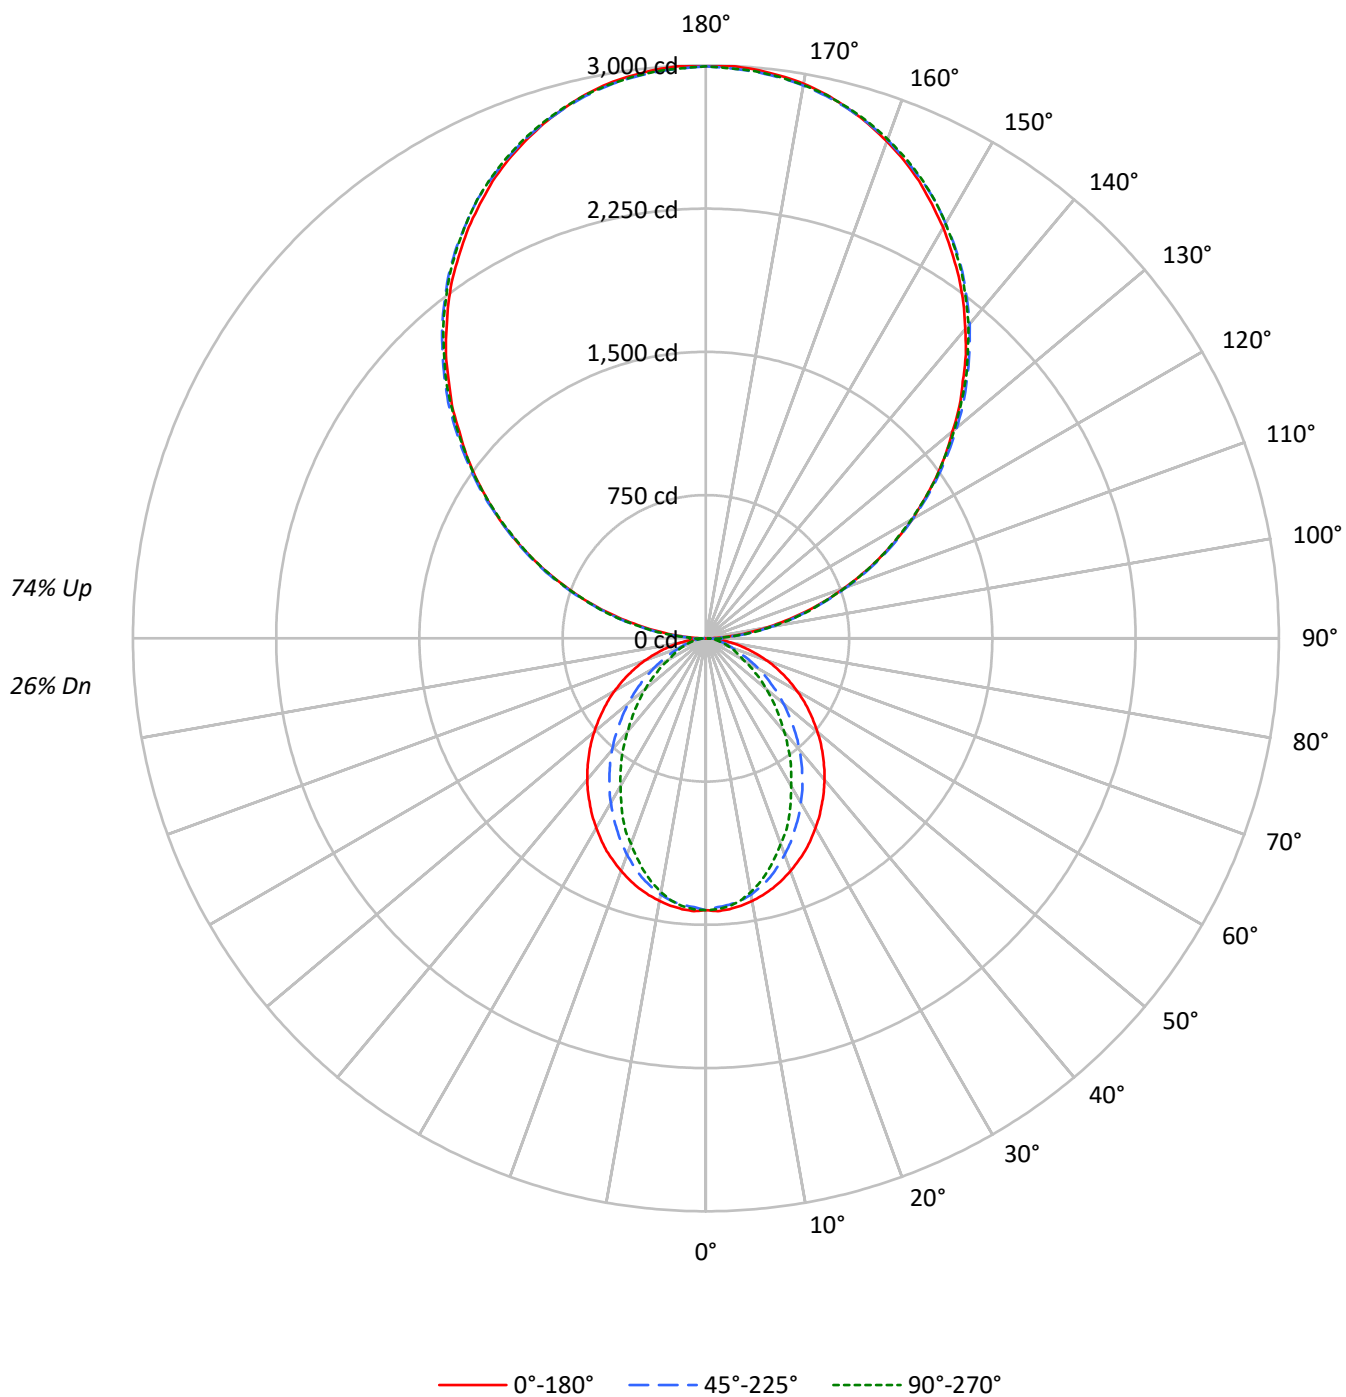

TEST NUMBER: P919542

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US935-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	70	70	70	51	51	51	34	34	34
1	93	89	85	82	82	79	76	73	62	60	58	45	44	43	30	30	29
2	85	78	72	67	75	69	65	61	54	51	48	40	38	36	27	26	25
3	77	68	61	56	69	61	55	51	48	44	41	36	33	31	24	23	21
4	71	61	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19
5	65	54	46	41	58	48	42	37	38	34	30	29	26	23	20	18	16
6	60	48	41	35	53	43	37	32	34	30	26	26	23	20	18	16	15
7	55	43	36	31	49	39	33	28	31	26	23	24	20	18	16	14	13
8	51	39	32	27	46	36	29	25	28	24	20	21	18	16	15	13	12
9	47	36	29	24	42	32	26	22	26	21	18	20	17	14	14	12	11
10	44	33	26	21	40	30	24	20	24	19	16	18	15	13	13	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1039	1039	1039
5°	1041	1023	1029
10°	1030	1003	996
15°	1016	970	944
20°	997	924	881
25°	978	873	820
30°	952	821	742
35°	927	764	674
40°	901	706	595
45°	871	641	525
50°	841	576	455
55°	808	506	388
60°	771	433	320
65°	728	359	288
70°	676	290	261
75°	610	256	238
80°	516	215	207
85°	360	144	157

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2346 cd/sqm

TEST NUMBER: P919542

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	133.4	1.2
10°-20°	366.2	3.2
20°-30°	514.2	4.5
30°-40°	560.5	5.0
40°-50°	515.1	4.6
50°-60°	404.5	3.6
60°-70°	263.3	2.3
70°-80°	135.6	1.2
80°-90°	43.1	0.4
90°-100°	185.3	1.6
100°-110°	588.9	5.2
110°-120°	1007.8	8.9
120°-130°	1325.4	11.7
130°-140°	1487.7	13.2
140°-150°	1458.9	12.9
150°-160°	1223.8	10.8
160°-170°	811.6	7.2
170°-180°	283.7	2.5
0°-30°	1013.8	9.0
0°-40°	1574.2	13.9
0°-60°	2493.9	22.1
0°-90°	2935.9	26.0
90°-120°	1782.1	15.8
90°-150°	6054.2	53.5
90°-180°	8373.0	74.0
0°-180°	11309.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1423	1423	1423	1423	1423	
5°	1423	1417	1400	1412	1408	135
15°	1354	1340	1296	1271	1259	382
25°	1229	1188	1103	1050	1030	565
35°	1059	993	880	799	770	663
45°	866	779	644	553	522	668
55°	658	558	419	341	317	588
65°	444	340	224	180	176	441
75°	237	147	103	94	93	251
85°	55	28	24	24	24	64
90°	3	32	88	83	86	11
95°	132	157	162	162	157	147
105°	544	551	556	561	561	574
115°	1011	1026	1021	1019	1011	1000
125°	1471	1494	1486	1478	1476	1315
135°	1903	1931	1936	1933	1926	1471
145°	2310	2328	2342	2345	2335	1443
155°	2641	2648	2657	2669	2661	1216
165°	2873	2871	2871	2889	2876	811
175°	2990	2983	2977	2995	2980	284
180°	2995	2995	2995	2995	2995	

TEST NUMBER: P919542

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1423.4	1423.4	1423.4	1423.4	1423.4
2.5°	1429.9	1423.4	1409.2	1422.2	1419.5
5°	1423.4	1416.9	1400.2	1411.8	1408.0
7.5°	1411.8	1404.1	1386.1	1391.1	1384.7
10°	1396.4	1387.3	1361.6	1357.6	1350.0
12.5°	1377.1	1365.5	1330.6	1322.9	1308.7
15°	1353.8	1339.6	1295.9	1271.4	1258.6
17.5°	1326.8	1306.1	1252.0	1223.7	1203.1
20°	1295.9	1270.1	1205.7	1173.5	1145.1
22.5°	1262.4	1232.8	1158.0	1114.2	1095.0
25°	1228.9	1187.7	1102.6	1049.9	1030.4
27.5°	1189.0	1145.1	1051.1	990.6	960.9
30°	1146.5	1097.4	994.4	928.8	894.0
32.5°	1105.3	1045.9	940.4	863.1	830.8
35°	1058.9	993.2	879.9	798.7	770.2
37.5°	1013.8	942.9	823.1	734.2	702.1
40°	966.1	888.9	763.9	672.4	638.9
42.5°	917.1	834.7	704.6	609.2	577.1
45°	865.6	779.3	644.1	552.6	521.7
47.5°	816.7	725.3	586.2	494.6	466.3
50°	762.6	671.1	529.4	440.5	413.5
52.5°	709.7	613.1	475.4	390.3	365.8
55°	658.2	557.8	418.6	341.4	316.9
57.5°	605.5	502.4	368.4	296.3	275.7
60°	551.3	448.2	315.6	249.9	229.4
62.5°	498.6	395.5	270.4	208.7	198.5
65°	444.4	340.0	224.1	180.4	176.4
67.5°	393.0	288.5	180.4	158.4	154.5
70°	338.8	238.3	149.4	136.6	131.3
72.5°	287.3	191.9	124.9	114.7	112.1
75°	236.9	146.8	103.1	94.0	92.8
77.5°	186.8	104.3	81.2	76.0	73.4
80°	140.3	74.7	61.7	56.7	56.7
82.5°	97.9	50.3	42.5	39.9	39.9
85°	55.4	28.3	24.5	24.5	24.5
87.5°	20.7	10.2	10.2	9.0	9.0
90°	2.7	32.5	88.5	83.1	85.8
92.5°	56.0	75.9	78.5	81.3	81.3
95°	131.8	157.1	161.6	161.6	157.1
97.5°	219.5	242.9	252.9	252.9	252.9
100°	320.5	341.3	348.5	348.5	345.9
102.5°	427.1	442.5	452.5	455.1	452.5
105°	543.6	550.9	556.3	560.8	560.8
107.5°	659.2	670.0	670.0	671.8	659.2
110°	771.2	785.7	785.7	785.7	778.4

TEST NUMBER: P919542

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US935-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	892.2	907.5	904.8	897.6	892.2
115°	1011.4	1025.8	1021.3	1018.6	1011.4
117.5°	1129.7	1149.5	1136.9	1129.7	1122.5
120°	1248.9	1268.8	1248.9	1248.9	1240.8
122.5°	1357.3	1382.5	1369.8	1362.6	1357.3
125°	1471.0	1493.6	1486.3	1478.2	1475.5
127.5°	1582.1	1610.1	1600.2	1589.3	1582.1
130°	1685.9	1718.5	1713.9	1708.5	1698.6
132.5°	1802.4	1827.7	1829.5	1816.9	1809.6
135°	1902.6	1930.6	1936.0	1933.4	1926.1
137.5°	2014.6	2037.2	2041.7	2039.9	2029.1
140°	2113.1	2135.6	2148.3	2148.3	2138.4
142.5°	2214.2	2236.8	2244.0	2246.7	2236.8
145°	2309.9	2328.0	2342.4	2345.1	2335.2
147.5°	2395.7	2418.3	2429.1	2433.6	2423.7
150°	2484.2	2499.6	2509.5	2517.6	2509.5
152.5°	2562.8	2578.1	2590.7	2600.7	2590.7
155°	2641.4	2648.5	2656.7	2669.4	2661.2
157.5°	2709.0	2714.5	2718.9	2737.0	2724.4
160°	2769.6	2775.0	2777.7	2793.1	2782.2
162.5°	2825.5	2825.5	2828.3	2845.4	2832.8
165°	2873.4	2870.7	2870.7	2888.7	2876.1
167.5°	2916.7	2908.6	2908.6	2926.7	2914.0
170°	2949.3	2942.0	2939.4	2957.4	2942.0
172.5°	2971.8	2964.6	2961.9	2980.0	2964.6
175°	2989.9	2982.7	2977.2	2995.3	2980.0
177.5°	2999.8	2992.6	2987.1	3002.6	2987.1
180°	2995.3	2995.3	2995.3	2995.3	2995.3

TEST NUMBER: P919542

CATALOG NUMBER: DFN2DIP-PN4F0-040D110US935-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.46	5.13	5.61	6.26	7.84	0.43	1.09	1.57	2.22	3.80
	3H	6.13	6.73	7.28	7.86	9.46	1.60	2.20	2.76	3.34	4.93
	4H	6.73	7.30	7.89	8.44	10.04	2.05	2.61	3.21	3.75	5.35
	6H	7.15	7.67	8.32	8.81	10.42	2.36	2.88	3.53	4.02	5.63
	8H	7.27	7.77	8.44	8.92	10.52	2.45	2.94	3.62	4.10	5.70
	12H	7.33	7.80	8.50	8.95	10.57	2.49	2.95	3.66	4.10	5.73
4H	2H	4.46	5.03	5.63	6.16	7.76	1.00	1.57	2.17	2.71	4.31
	3H	6.28	6.75	7.45	7.91	9.52	2.34	2.81	3.51	3.98	5.59
	4H	6.97	7.40	8.14	8.55	10.18	2.88	3.32	4.06	4.47	6.10
	6H	7.47	7.84	8.65	9.02	10.64	3.29	3.66	4.47	4.84	6.46
	8H	7.65	7.99	8.83	9.16	10.80	3.42	3.77	4.60	4.93	6.57
	12H	7.74	8.05	8.93	9.23	10.87	3.48	3.79	4.67	4.97	6.61
8H	4H	6.92	7.27	8.10	8.43	10.07	3.15	3.50	4.33	4.66	6.30
	6H	7.48	7.77	8.68	8.98	10.61	3.67	3.95	4.86	5.16	6.79
	8H	7.70	7.95	8.90	9.14	10.79	3.86	4.10	5.06	5.29	6.95
	12H	7.84	8.05	9.04	9.24	10.92	3.97	4.19	5.17	5.37	7.06
12H	4H	6.87	7.18	8.06	8.36	10.00	3.15	3.46	4.34	4.64	6.28
	6H	7.46	7.71	8.66	8.89	10.55	3.71	3.96	4.92	5.15	6.80
	8H	7.67	7.89	8.88	9.08	10.76	3.92	4.14	5.12	5.32	7.01

END OF REPORT