

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919545

Luminaire Tested: DFN2DIP-PN4F0-040D120US935-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919545
REPORT IS A COMBINATION OF REPORTS P901273 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-040D120US935-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13638.2 lumens
Efficiency: N/A
Efficacy: 99.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 136.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9968
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919545

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US935-FLLONL

Luminous Intensity Polar Plot

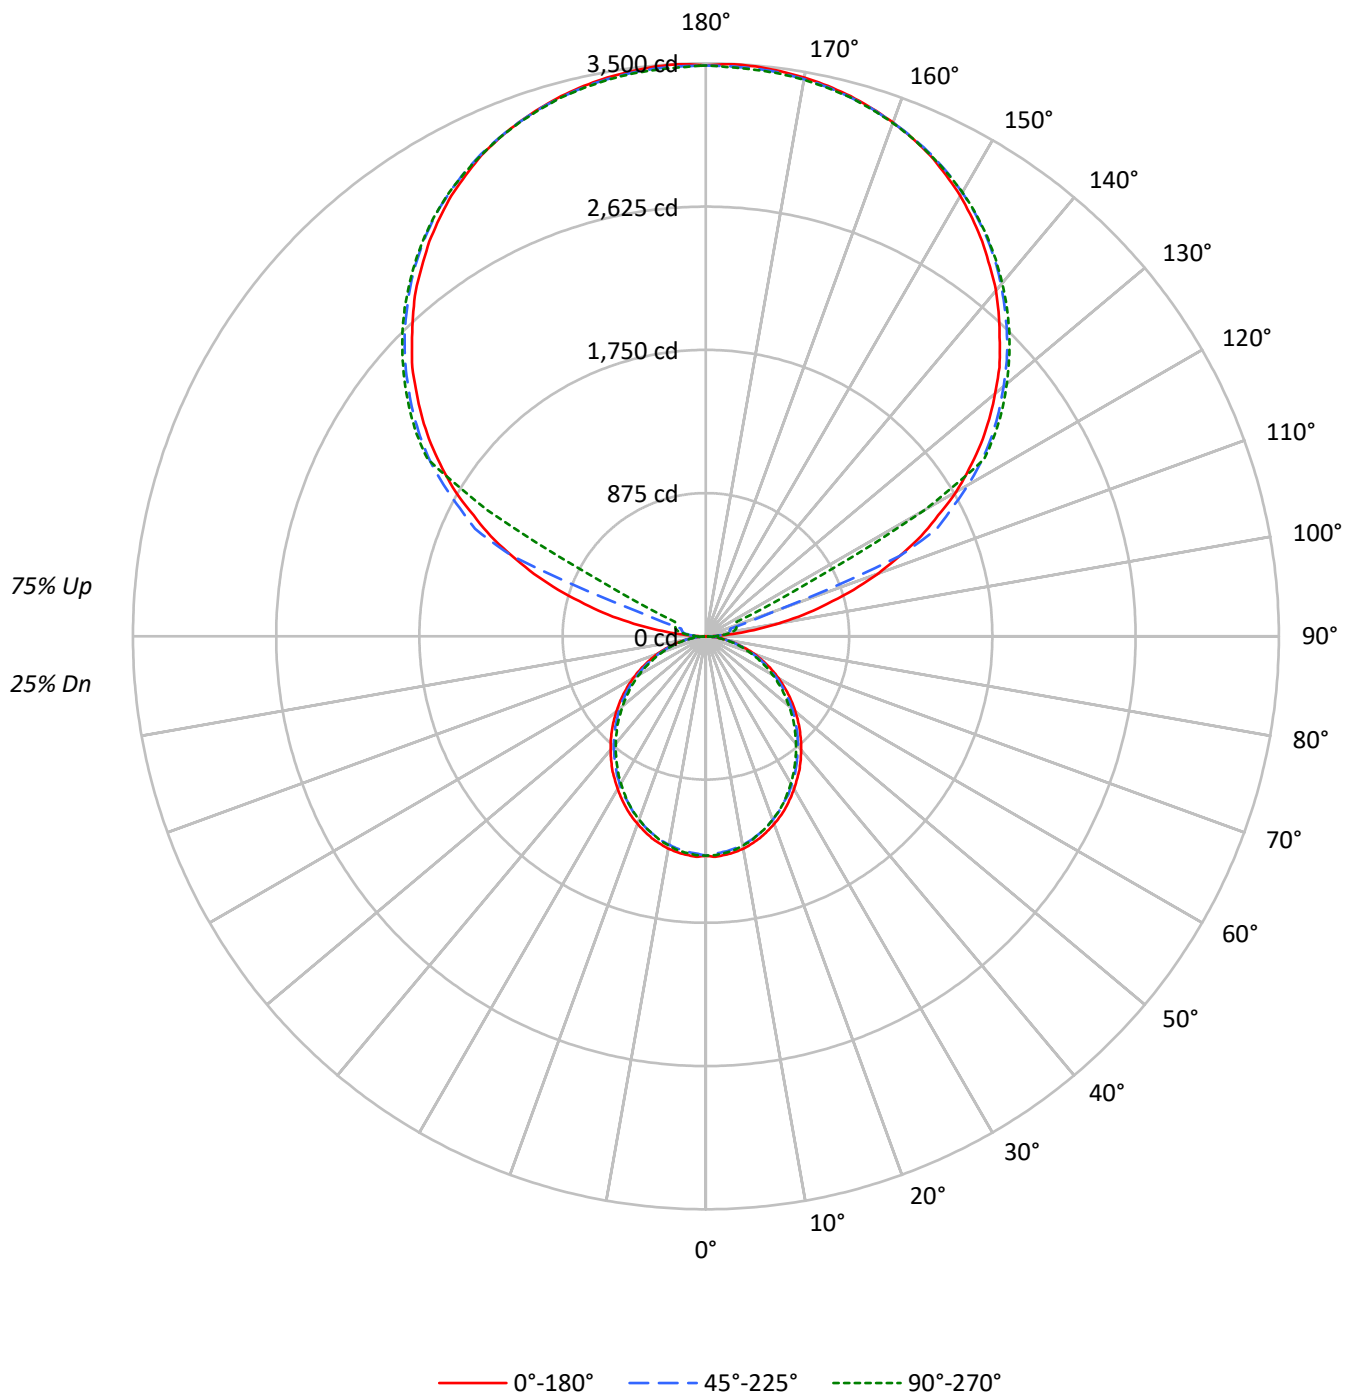

TEST NUMBER: P919545

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US935-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	101	101	101	101	90	90	90	90	69	69	69	51	51	51	33	33	33
1	92	88	84	81	82	79	75	73	61	59	57	44	43	42	29	29	28
2	84	77	71	66	74	69	64	59	53	50	47	39	37	35	26	25	24
3	76	67	60	55	68	60	54	50	47	43	39	34	32	30	23	21	20
4	70	60	52	46	62	53	47	42	42	37	33	31	28	25	20	19	17
5	64	53	45	39	57	47	41	36	37	32	29	27	24	22	18	16	15
6	59	47	40	34	52	42	36	31	33	28	25	25	21	19	17	15	13
7	54	43	35	30	48	38	32	27	30	25	22	22	19	17	15	13	12
8	50	38	31	26	45	35	28	24	27	23	19	20	17	15	14	12	10
9	47	35	28	23	41	31	25	21	25	20	17	19	15	13	13	11	9
10	43	32	25	20	39	29	23	19	23	18	15	17	14	12	12	10	8

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	978	978	978
5°	980	965	971
10°	972	952	958
15°	958	936	938
20°	938	915	917
25°	919	889	893
30°	895	865	862
35°	872	836	830
40°	844	807	799
45°	816	779	767
50°	785	749	730
55°	753	714	697
60°	717	672	658
65°	678	629	613
70°	627	577	564
75°	558	514	519
80°	474	434	433
85°	343	296	289

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1859 cd/sqm

TEST NUMBER: P919545

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US935-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	126.1	0.9
10°-20°	354.9	2.6
20°-30°	521.5	3.8
30°-40°	605.7	4.4
40°-50°	605.0	4.4
50°-60°	527.5	3.9
60°-70°	389.9	2.9
70°-80°	220.6	1.6
80°-90°	64.4	0.5
90°-100°	115.0	0.8
100°-110°	428.6	3.1
110°-120°	1136.8	8.3
120°-130°	1885.4	13.8
130°-140°	2002.8	14.7
140°-150°	1861.3	13.6
150°-160°	1496.5	11.0
160°-170°	964.3	7.1
170°-180°	331.9	2.4
0°-30°	1002.5	7.4
0°-40°	1608.3	11.8
0°-60°	2740.7	20.1
0°-90°	3415.7	25.0
90°-120°	1680.4	12.3
90°-150°	7429.9	54.5
90°-180°	10223.0	75.0
0°-180°	13638.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1340	1340	1340	1340	1340	
5°	1340	1335	1321	1331	1329	127
15°	1276	1268	1251	1256	1250	359
25°	1154	1144	1122	1125	1122	531
35°	996	983	963	955	948	622
45°	810	802	782	768	763	626
55°	614	606	590	575	568	548
65°	414	406	393	381	375	409
75°	216	214	207	200	202	231
85°	53	52	50	46	45	59
90°	2	30	50	63	68	12
95°	164	81	98	111	108	194
105°	767	843	154	182	192	820
115°	1451	1494	1557	389	207	1428
125°	2051	2084	2132	2150	2157	1829
135°	2538	2579	2601	2627	2622	1961
145°	2945	2942	2985	3002	2990	1842
155°	3242	3220	3250	3265	3245	1494
165°	3416	3401	3409	3426	3409	965
175°	3494	3477	3482	3500	3474	333
180°	3487	3487	3487	3487	3487	

TEST NUMBER: P919545

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US935-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1340.1	1340.1	1340.1	1340.1	1340.1
2.5°	1347.9	1341.4	1327.2	1340.1	1337.6
5°	1340.1	1335.0	1320.8	1331.0	1328.6
7.5°	1331.0	1323.4	1309.1	1319.6	1317.0
10°	1317.0	1307.9	1292.5	1302.8	1298.9
12.5°	1297.5	1289.9	1274.4	1280.9	1278.2
15°	1275.7	1268.0	1251.2	1256.4	1250.0
17.5°	1248.6	1241.0	1224.2	1230.5	1224.2
20°	1218.9	1211.3	1193.3	1197.0	1192.1
22.5°	1189.4	1177.8	1161.0	1161.0	1158.4
25°	1154.5	1144.3	1122.4	1124.9	1122.4
27.5°	1115.9	1106.8	1090.2	1086.3	1079.9
30°	1077.3	1066.9	1047.7	1043.8	1038.6
32.5°	1036.0	1028.4	1007.7	1000.0	994.7
35°	996.1	983.3	962.6	954.8	948.4
37.5°	951.0	939.3	918.7	909.7	903.3
40°	904.7	894.2	873.6	862.1	857.0
42.5°	859.5	849.1	828.6	815.6	808.0
45°	810.5	801.6	782.1	768.1	762.8
47.5°	762.8	753.8	733.2	719.0	711.4
50°	712.6	706.1	688.1	670.0	663.6
52.5°	663.6	654.6	637.9	623.7	614.7
55°	613.5	605.6	590.2	574.7	568.3
57.5°	563.1	556.7	539.8	524.4	519.3
60°	512.8	507.7	489.7	475.5	471.7
62.5°	463.9	454.9	442.0	429.1	424.0
65°	413.7	405.9	393.0	381.4	375.1
67.5°	362.1	355.6	344.1	335.1	329.9
70°	314.4	309.3	297.6	288.6	283.5
72.5°	265.5	260.3	253.9	244.9	241.0
75°	216.5	214.0	207.4	199.8	202.3
77.5°	172.6	167.5	164.9	161.0	157.2
80°	128.9	127.5	124.9	121.1	118.6
82.5°	87.6	87.6	86.4	81.2	81.2
85°	52.8	51.6	50.3	46.3	45.1
87.5°	23.2	20.7	18.1	14.2	12.8
90°	2.4	30.2	50.4	63.2	68.0
92.5°	63.2	53.0	60.5	65.6	68.0
95°	163.8	80.6	98.2	111.2	108.5
97.5°	295.2	88.4	128.5	136.3	138.7
100°	446.7	101.0	143.8	163.8	169.0
102.5°	613.0	608.2	148.9	176.5	184.3
105°	767.0	842.8	154.0	181.6	191.7
107.5°	946.2	1009.1	159.1	186.7	196.8
110°	1117.8	1170.6	441.6	189.3	199.2

TEST NUMBER: P919545

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US935-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1279.4	1324.6	1281.8	194.2	201.9
115°	1450.7	1493.6	1556.8	388.6	207.1
117.5°	1599.6	1650.0	1693.2	1332.0	671.1
120°	1766.3	1804.0	1849.5	1879.8	1539.1
122.5°	1907.4	1947.8	1998.5	2013.4	2016.1
125°	2051.2	2084.1	2132.1	2149.7	2157.2
127.5°	2182.4	2217.8	2255.8	2281.0	2283.4
130°	2306.1	2346.6	2374.1	2402.0	2399.6
132.5°	2432.2	2465.2	2492.8	2515.6	2513.2
135°	2538.3	2578.8	2601.2	2626.7	2621.7
137.5°	2649.2	2679.4	2704.9	2730.1	2722.6
140°	2757.7	2778.0	2805.6	2828.4	2815.8
142.5°	2848.7	2866.4	2899.1	2919.1	2906.6
145°	2944.6	2941.9	2984.7	3002.5	2989.8
147.5°	3027.6	3020.1	3063.0	3075.6	3065.7
150°	3108.5	3090.8	3131.3	3146.3	3133.7
152.5°	3176.5	3156.4	3194.2	3209.5	3191.8
155°	3242.1	3219.6	3249.9	3264.9	3244.8
157.5°	3295.1	3275.1	3297.9	3315.5	3295.1
160°	3340.7	3325.4	3340.7	3355.7	3338.0
162.5°	3380.9	3365.9	3378.5	3396.1	3373.4
165°	3416.2	3401.2	3408.7	3426.4	3408.7
167.5°	3444.1	3428.8	3436.6	3454.2	3431.5
170°	3466.8	3451.6	3456.6	3474.3	3451.6
172.5°	3481.8	3466.8	3472.0	3489.6	3466.8
175°	3494.4	3476.7	3481.8	3499.5	3474.3
177.5°	3499.5	3481.8	3484.5	3502.2	3479.5
180°	3487.0	3487.0	3487.0	3487.0	3487.0

TEST NUMBER: P919545

CATALOG NUMBER: DFN2DIP-PN4F0-040D120US935-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	4.26	4.93	5.41	6.07	7.66	3.82	4.49	4.97	5.63	7.22
	3H	5.91	6.51	7.06	7.66	9.26	5.42	6.03	6.58	7.17	8.77
	4H	6.49	7.06	7.65	8.21	9.81	6.00	6.58	7.16	7.72	9.33
	6H	6.88	7.41	8.05	8.55	10.17	6.39	6.92	7.56	8.06	9.68
	8H	6.98	7.48	8.15	8.64	10.26	6.49	6.99	7.66	8.15	9.76
	12H	7.03	7.50	8.20	8.66	10.29	6.53	7.00	7.70	8.16	9.79
4H	2H	4.70	5.27	5.87	6.41	8.02	4.35	4.92	5.52	6.06	7.67
	3H	6.55	7.03	7.72	8.20	9.82	6.15	6.63	7.32	7.79	9.41
	4H	7.26	7.70	8.44	8.86	10.50	6.84	7.28	8.02	8.44	10.08
	6H	7.77	8.14	8.95	9.32	10.95	7.34	7.72	8.52	8.90	10.53
	8H	7.91	8.26	9.09	9.44	11.08	7.48	7.84	8.66	9.01	10.65
	12H	7.98	8.30	9.17	9.48	11.13	7.54	7.86	8.73	9.04	10.69
8H	4H	7.44	7.79	8.62	8.96	10.61	7.07	7.42	8.25	8.59	10.24
	6H	8.07	8.36	9.27	9.57	11.21	7.69	7.98	8.89	9.19	10.84
	8H	8.29	8.54	9.49	9.73	11.39	7.90	8.16	9.11	9.35	11.01
	12H	8.41	8.63	9.62	9.82	11.52	8.01	8.23	9.22	9.42	11.11
12H	4H	7.42	7.74	8.61	8.92	10.57	7.05	7.37	8.25	8.56	10.21
	6H	8.10	8.35	9.30	9.54	11.20	7.73	7.98	8.94	9.17	10.84
	8H	8.33	8.55	9.54	9.74	11.43	7.96	8.18	9.17	9.37	11.06

END OF REPORT