

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919646

Luminaire Tested: DFN2DIP-PN4F0-070D100US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919646
REPORT IS A COMBINATION OF REPORTS P899724 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D100US935-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12742.8 lumens
Efficiency: N/A
Efficacy: 90.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 141.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919646

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US935-RLLFLL

Luminous Intensity Polar Plot

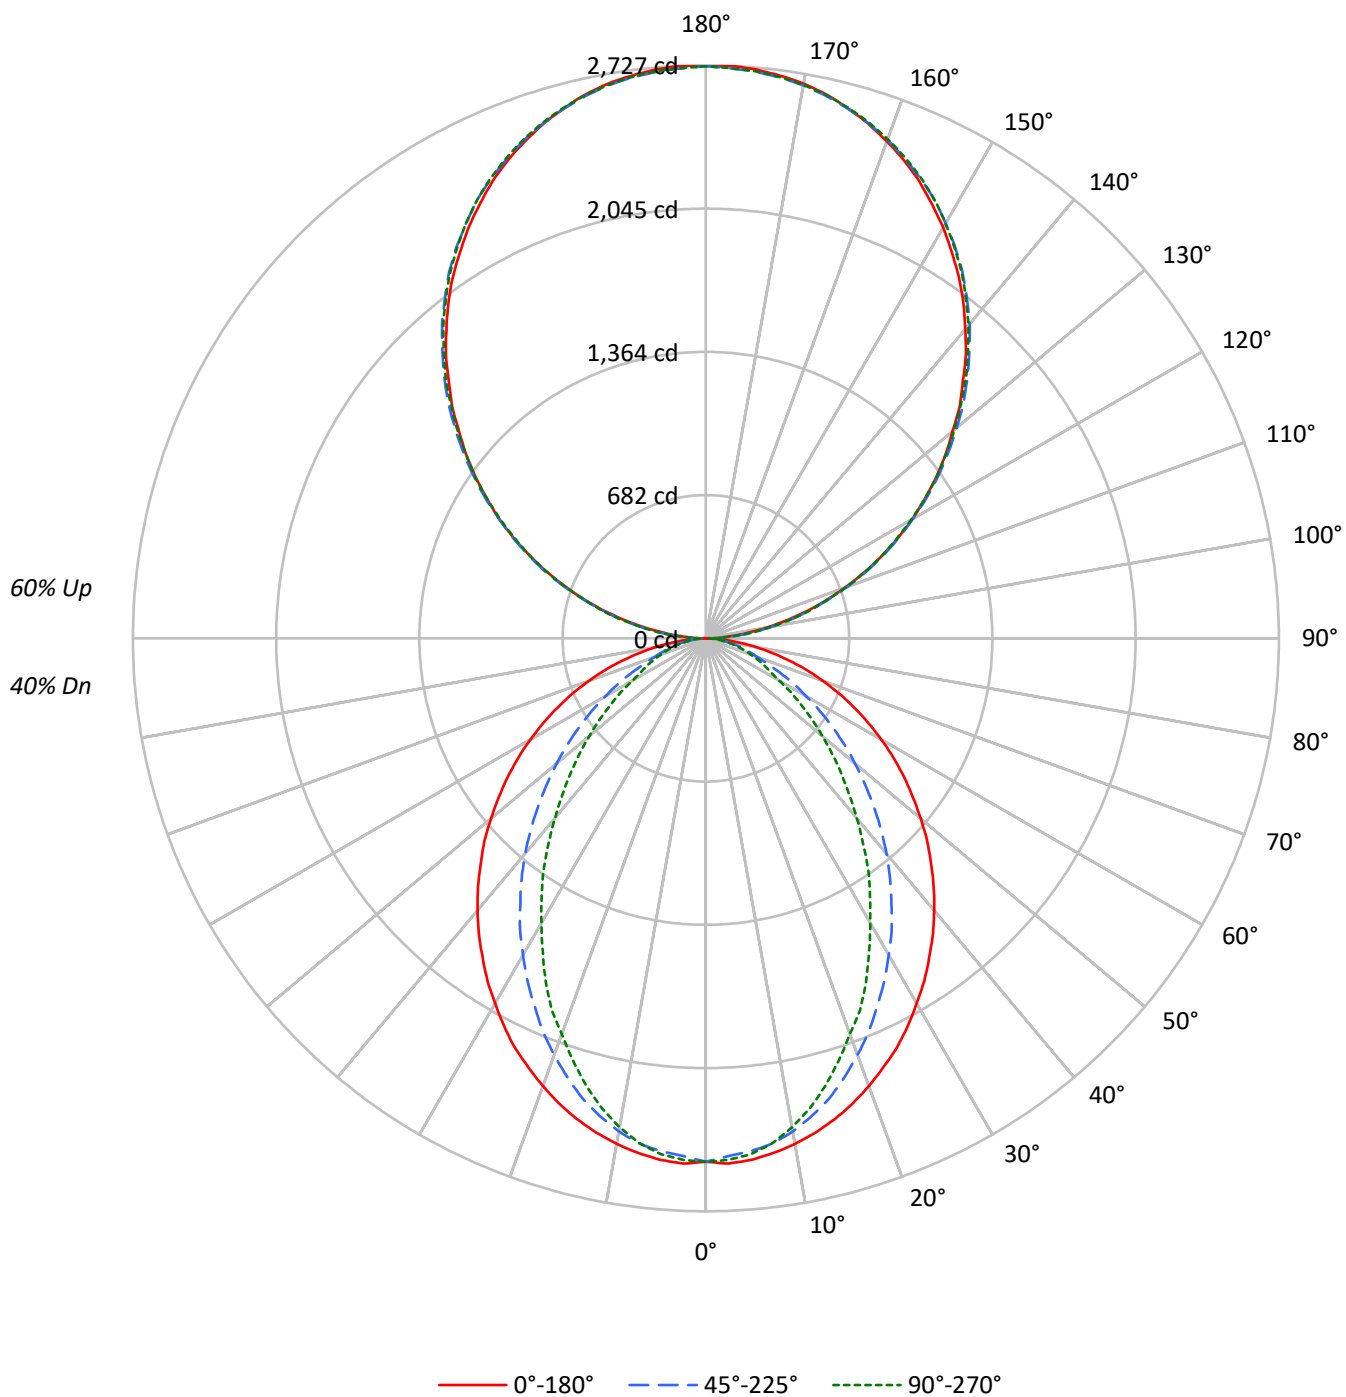

TEST NUMBER: P919646

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US935-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					10
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	105	105	105	105		95	95	95	95		78	78	78		62	62	62		47	47	47
1	96	92	88	85		87	84	81	78		69	67	65		55	54	52		42	41	41
2	88	81	75	70		80	74	69	65		61	57	54		49	46	44		38	36	35
3	80	71	64	59		73	65	59	54		54	50	46		43	40	38		34	32	30
4	74	63	56	50		67	58	51	46		48	43	39		39	35	33		30	28	26
5	68	56	49	43		61	52	45	40		43	38	34		35	31	29		28	25	23
6	62	51	43	37		57	47	40	35		39	34	30		32	28	25		25	23	20
7	58	46	38	33		53	42	35	31		35	30	27		29	25	22		23	20	18
8	54	42	34	29		49	38	32	27		32	27	24		27	23	20		21	19	17
9	50	38	31	26		45	35	29	24		30	25	21		25	21	18		20	17	15
10	47	35	28	23		43	32	26	22		27	22	19		23	19	16		18	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1818	1818	1818
5°	1821	1790	1801
10°	1803	1755	1743
15°	1778	1697	1653
20°	1746	1617	1542
25°	1712	1528	1435
30°	1667	1436	1299
35°	1622	1338	1179
40°	1577	1236	1042
45°	1525	1122	918
50°	1471	1008	797
55°	1415	886	680
60°	1349	758	560
65°	1274	628	504
70°	1183	507	457
75°	1068	447	417
80°	902	376	363
85°	629	252	275

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2132 cd/sqm

TEST NUMBER: P919646

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	233.5	1.8
10°-20°	640.9	5.0
20°-30°	899.8	7.1
30°-40°	980.8	7.7
40°-50°	901.5	7.1
50°-60°	708.0	5.6
60°-70°	460.8	3.6
70°-80°	237.2	1.9
80°-90°	68.3	0.5
90°-100°	168.5	1.3
100°-110°	535.4	4.2
110°-120°	916.2	7.2
120°-130°	1204.9	9.5
130°-140°	1352.5	10.6
140°-150°	1326.3	10.4
150°-160°	1112.6	8.7
160°-170°	737.8	5.8
170°-180°	257.9	2.0
0°-30°	1774.1	13.9
0°-40°	2754.9	21.6
0°-60°	4364.3	34.2
0°-90°	5130.6	40.3
90°-120°	1620.1	12.7
90°-150°	5503.8	43.2
90°-180°	7612.0	59.7
0°-180°	12742.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2491	2491	2491	2491	2491	
5°	2491	2480	2450	2471	2464	236
15°	2369	2344	2268	2225	2202	668
25°	2151	2078	1930	1837	1803	989
35°	1853	1738	1540	1398	1348	1160
45°	1515	1364	1127	967	913	1170
55°	1152	976	732	597	555	1029
65°	778	595	392	316	309	771
75°	415	257	180	164	162	439
85°	97	50	43	43	43	111
90°	2	30	80	76	78	13
95°	120	143	147	147	143	133
105°	494	501	506	510	510	522
115°	920	932	928	926	920	909
125°	1337	1358	1351	1344	1341	1195
135°	1730	1755	1760	1758	1751	1337
145°	2100	2116	2130	2132	2123	1312
155°	2401	2408	2415	2427	2419	1105
165°	2612	2610	2610	2626	2615	737
175°	2718	2712	2707	2723	2709	258
180°	2723	2723	2723	2723	2723	

TEST NUMBER: P919646

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2491.0	2491.0	2491.0	2491.0	2491.0
2.5°	2502.1	2491.0	2466.1	2488.8	2484.2
5°	2491.0	2479.7	2450.3	2470.6	2463.9
7.5°	2470.6	2457.2	2425.7	2434.5	2423.3
10°	2443.6	2427.8	2382.8	2375.9	2362.5
12.5°	2409.8	2389.5	2328.6	2315.1	2290.3
15°	2369.2	2344.3	2267.8	2225.0	2202.5
17.5°	2321.9	2285.8	2191.1	2141.5	2105.4
20°	2267.8	2222.6	2110.0	2053.7	2004.0
22.5°	2209.2	2157.3	2026.4	1949.9	1916.2
25°	2150.6	2078.4	1929.6	1837.3	1803.4
27.5°	2080.8	2004.0	1839.4	1733.5	1681.6
30°	2006.4	1920.5	1740.2	1625.4	1564.4
32.5°	1934.1	1830.4	1645.7	1510.4	1453.9
35°	1853.0	1738.0	1539.8	1397.7	1348.0
37.5°	1774.2	1650.0	1440.5	1284.8	1228.6
40°	1690.7	1555.6	1336.7	1176.7	1118.1
42.5°	1605.1	1460.9	1233.1	1066.2	1010.0
45°	1514.9	1363.7	1127.2	967.0	912.9
47.5°	1429.3	1269.3	1025.8	865.6	816.1
50°	1334.5	1174.6	926.5	770.9	723.8
52.5°	1242.0	1072.9	831.8	683.0	640.2
55°	1151.8	976.0	732.5	597.4	554.7
57.5°	1059.5	879.2	644.8	518.5	482.4
60°	964.8	784.5	552.2	437.5	401.3
62.5°	872.4	692.2	473.3	365.2	347.2
65°	777.7	595.0	392.3	315.7	308.8
67.5°	687.6	504.9	315.7	277.2	270.5
70°	592.9	417.1	261.4	238.9	229.8
72.5°	502.7	335.8	218.6	200.7	196.1
75°	414.7	256.8	180.3	164.5	162.4
77.5°	326.9	182.4	142.1	132.9	128.5
80°	245.6	130.8	108.1	99.3	99.3
82.5°	171.3	88.0	74.4	69.8	69.8
85°	96.9	49.5	42.8	42.8	42.8
87.5°	36.1	17.9	17.9	15.8	15.8
90°	2.5	29.5	80.4	75.5	78.0
92.5°	50.9	69.0	71.5	73.9	73.9
95°	119.9	142.8	147.0	147.0	142.8
97.5°	199.5	220.8	229.9	229.9	229.9
100°	291.4	310.3	316.8	316.8	314.4
102.5°	388.3	402.3	411.3	413.7	411.3
105°	494.2	500.8	505.7	509.8	509.8
107.5°	599.3	609.2	609.2	610.8	599.3
110°	701.1	714.2	714.2	714.2	707.7

TEST NUMBER: P919646

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US935-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	811.1	825.0	822.6	816.0	811.1
115°	919.5	932.5	928.5	926.0	919.5
117.5°	1027.0	1045.1	1033.5	1027.0	1020.4
120°	1135.3	1153.4	1135.3	1135.3	1128.0
122.5°	1233.8	1256.8	1245.3	1238.8	1233.8
125°	1337.3	1357.8	1351.3	1343.8	1341.4
127.5°	1438.3	1463.7	1454.7	1444.8	1438.3
130°	1532.7	1562.2	1558.1	1553.2	1544.2
132.5°	1638.6	1661.6	1663.2	1651.7	1645.1
135°	1729.7	1755.1	1760.1	1757.6	1751.0
137.5°	1831.5	1852.0	1856.1	1854.5	1844.6
140°	1921.0	1941.5	1953.0	1953.0	1944.0
142.5°	2012.9	2033.4	2040.0	2042.5	2033.4
145°	2099.9	2116.3	2129.5	2131.9	2122.9
147.5°	2177.9	2198.5	2208.3	2212.4	2203.4
150°	2258.4	2272.3	2281.4	2288.7	2281.4
152.5°	2329.8	2343.7	2355.3	2364.3	2355.3
155°	2401.2	2407.8	2415.2	2426.6	2419.2
157.5°	2462.8	2467.7	2471.8	2488.2	2476.7
160°	2517.8	2522.7	2525.1	2539.1	2529.3
162.5°	2568.7	2568.7	2571.1	2586.7	2575.2
165°	2612.2	2609.7	2609.7	2626.1	2614.7
167.5°	2651.6	2644.2	2644.2	2660.7	2649.1
170°	2681.1	2674.6	2672.1	2688.6	2674.6
172.5°	2701.6	2695.1	2692.6	2709.0	2695.1
175°	2718.1	2711.5	2706.6	2723.0	2709.0
177.5°	2727.1	2720.6	2715.6	2729.5	2715.6
180°	2723.0	2723.0	2723.0	2723.0	2723.0

TEST NUMBER: P919646

CATALOG NUMBER: DFN2DIP-PN4F0-070D100US935-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.25	9.00	9.29	10.05	11.45	4.21	4.97	5.25	6.01	7.42
	3H	9.92	10.60	10.97	11.65	13.08	5.40	6.07	6.45	7.12	8.55
	4H	10.53	11.17	11.59	12.22	13.66	5.84	6.48	6.91	7.54	8.97
	6H	10.95	11.54	12.02	12.60	14.04	6.16	6.75	7.23	7.81	9.25
	8H	11.07	11.64	12.15	12.71	14.15	6.25	6.81	7.33	7.89	9.32
	12H	11.14	11.67	12.22	12.74	14.20	6.29	6.82	7.37	7.89	9.35
4H	2H	8.26	8.90	9.33	9.95	11.38	4.80	5.44	5.87	6.50	7.93
	3H	10.08	10.61	11.16	11.70	13.14	6.14	6.68	7.22	7.76	9.20
	4H	10.77	11.26	11.86	12.33	13.80	6.69	7.18	7.77	8.25	9.72
	6H	11.29	11.71	12.38	12.80	14.26	7.11	7.52	8.20	8.62	10.08
	8H	11.46	11.85	12.55	12.94	14.42	7.23	7.63	8.33	8.71	10.19
	12H	11.56	11.91	12.66	13.01	14.49	7.30	7.65	8.41	8.75	10.23
8H	4H	10.74	11.13	11.83	12.22	13.69	6.97	7.36	8.06	8.45	9.92
	6H	11.30	11.62	12.42	12.76	14.23	7.48	7.81	8.60	8.94	10.41
	8H	11.52	11.80	12.64	12.92	14.41	7.68	7.96	8.80	9.07	10.56
	12H	11.66	11.91	12.78	13.01	14.55	7.79	8.04	8.91	9.15	10.68
12H	4H	10.68	11.04	11.79	12.14	13.62	6.97	7.32	8.08	8.42	9.90
	6H	11.28	11.56	12.40	12.67	14.17	7.53	7.82	8.65	8.93	10.42
	8H	11.50	11.75	12.62	12.85	14.38	7.74	7.99	8.86	9.10	10.63