

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919763

Luminaire Tested: DFN2DIP-PN4F0-100D120US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919763
REPORT IS A COMBINATION OF REPORTS P901286 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D120US935-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17547.1 lumens
Efficiency: N/A
Efficacy: 85.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 204.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919763

CATALOG NUMBER: DFN2DIP-PN4F0-100D120US935-RLLONL

Luminous Intensity Polar Plot

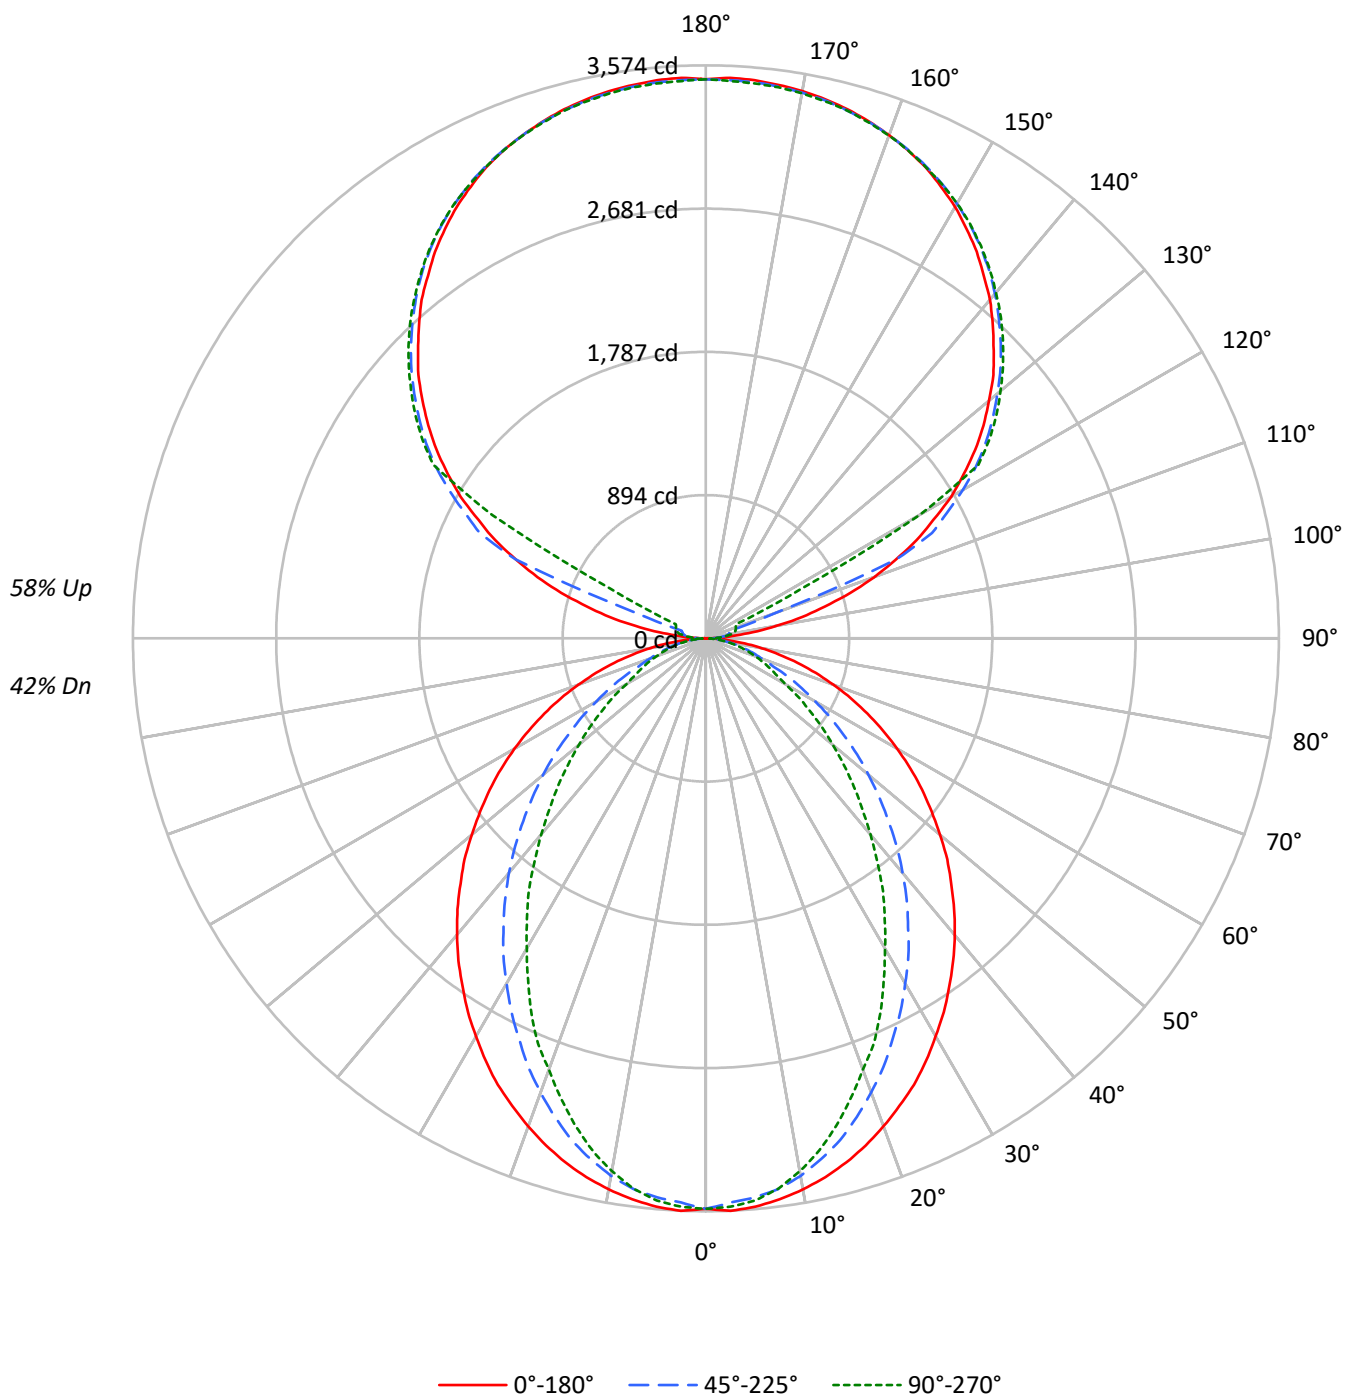

TEST NUMBER: P919763

CATALOG NUMBER: DFN2DIP-PN4F0-100D120US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	43	43	42
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36
3	81	72	65	59	73	66	60	55	55	50	46	44	41	39	35	33	31
4	74	64	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24
6	63	51	43	38	57	47	40	35	39	34	30	32	29	26	26	23	21
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	34	29	49	39	32	27	33	28	24	27	23	20	22	19	17
9	50	38	31	26	46	35	29	25	30	25	22	25	21	18	20	17	15
10	47	35	28	23	43	33	26	22	28	23	19	23	19	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2598	2598	2598
5°	2602	2557	2573
10°	2576	2507	2490
15°	2540	2424	2361
20°	2494	2310	2202
25°	2446	2183	2049
30°	2381	2052	1855
35°	2318	1911	1684
40°	2253	1765	1489
45°	2179	1603	1311
50°	2101	1440	1138
55°	2021	1265	971
60°	1927	1083	800
65°	1820	897	721
70°	1690	724	653
75°	1526	639	595
80°	1289	537	518
85°	898	360	392

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2179 cd/sqm

TEST NUMBER: P919763

CATALOG NUMBER: DFN2DIP-PN4F0-100D120US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	333.5	1.9
10°-20°	915.5	5.2
20°-30°	1285.4	7.3
30°-40°	1401.2	8.0
40°-50°	1287.8	7.3
50°-60°	1011.4	5.8
60°-70°	658.3	3.8
70°-80°	338.9	1.9
80°-90°	92.7	0.5
90°-100°	115.0	0.7
100°-110°	428.6	2.4
110°-120°	1136.8	6.5
120°-130°	1885.4	10.7
130°-140°	2002.8	11.4
140°-150°	1861.3	10.6
150°-160°	1496.5	8.5
160°-170°	964.3	5.5
170°-180°	331.9	1.9
0°-30°	2534.4	14.4
0°-40°	3935.6	22.4
0°-60°	6234.8	35.5
0°-90°	7324.6	41.7
90°-120°	1680.4	9.6
90°-150°	7429.9	42.3
90°-180°	10223.0	58.3
0°-180°	17547.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3558	3558	3558	3558	3558	
5°	3558	3542	3500	3530	3520	337
15°	3385	3349	3240	3178	3146	954
25°	3072	2969	2757	2625	2576	1413
35°	2647	2483	2200	1997	1926	1657
45°	2164	1948	1610	1381	1304	1671
55°	1646	1394	1046	854	792	1470
65°	1111	850	560	451	441	1102
75°	592	367	258	235	232	627
85°	138	71	61	61	61	159
90°	2	30	50	63	68	16
95°	164	81	98	111	108	194
105°	767	843	154	182	192	820
115°	1451	1494	1557	389	207	1428
125°	2051	2084	2132	2150	2157	1829
135°	2538	2579	2601	2627	2622	1961
145°	2945	2942	2985	3002	2990	1842
155°	3242	3220	3250	3265	3245	1494
165°	3416	3401	3409	3426	3409	965
175°	3494	3477	3482	3500	3474	333
180°	3487	3487	3487	3487	3487	

TEST NUMBER: P919763

CATALOG NUMBER: DFN2DIP-PN4F0-100D120US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3558.5	3558.5	3558.5	3558.5	3558.5
2.5°	3574.5	3558.5	3522.9	3555.4	3548.9
5°	3558.5	3542.4	3500.4	3529.5	3519.8
7.5°	3529.5	3510.3	3465.2	3477.8	3461.8
10°	3490.8	3468.3	3404.0	3394.1	3375.0
12.5°	3442.7	3413.6	3326.5	3307.4	3271.8
15°	3384.6	3349.0	3239.7	3178.5	3146.4
17.5°	3316.9	3265.3	3130.1	3059.3	3007.7
20°	3239.7	3175.1	3014.2	2933.9	2862.8
22.5°	3156.0	3081.9	2894.9	2785.7	2737.5
25°	3072.3	2969.2	2756.6	2624.7	2576.2
27.5°	2972.5	2862.8	2627.8	2476.4	2402.3
30°	2866.3	2743.6	2486.0	2322.0	2234.9
32.5°	2763.1	2614.8	2351.0	2157.7	2077.0
35°	2647.2	2482.9	2199.7	1996.7	1925.6
37.5°	2534.5	2357.2	2057.9	1835.5	1755.1
40°	2415.3	2222.2	1909.6	1681.0	1597.3
42.5°	2292.9	2086.9	1761.7	1523.2	1442.9
45°	2164.1	1948.2	1610.3	1381.4	1304.2
47.5°	2041.9	1813.3	1465.4	1236.5	1165.8
50°	1906.5	1677.9	1323.6	1101.2	1033.9
52.5°	1774.3	1532.7	1188.3	975.8	914.6
55°	1645.5	1394.4	1046.5	853.5	792.3
57.5°	1513.6	1255.9	921.2	740.7	689.1
60°	1378.3	1120.7	788.9	624.9	573.3
62.5°	1246.4	988.8	676.1	521.8	496.1
65°	1111.1	850.1	560.3	451.0	441.1
67.5°	982.3	721.3	451.0	396.0	386.4
70°	847.0	595.9	373.4	341.3	328.4
72.5°	718.2	479.7	312.3	286.6	280.2
75°	592.5	367.0	257.6	235.1	232.0
77.5°	467.1	260.7	202.9	189.9	183.5
80°	350.9	186.9	154.5	141.8	141.8
82.5°	244.6	125.7	106.2	99.8	99.8
85°	138.4	70.7	61.1	61.1	61.1
87.5°	51.6	25.7	25.7	22.6	22.6
90°	2.4	30.2	50.4	63.2	68.0
92.5°	63.2	53.0	60.5	65.6	68.0
95°	163.8	80.6	98.2	111.2	108.5
97.5°	295.2	88.4	128.5	136.3	138.7
100°	446.7	101.0	143.8	163.8	169.0
102.5°	613.0	608.2	148.9	176.5	184.3
105°	767.0	842.8	154.0	181.6	191.7
107.5°	946.2	1009.1	159.1	186.7	196.8
110°	1117.8	1170.6	441.6	189.3	199.2

TEST NUMBER: P919763

CATALOG NUMBER: DFN2DIP-PN4F0-100D120US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1279.4	1324.6	1281.8	194.2	201.9
115°	1450.7	1493.6	1556.8	388.6	207.1
117.5°	1599.6	1650.0	1693.2	1332.0	671.1
120°	1766.3	1804.0	1849.5	1879.8	1539.1
122.5°	1907.4	1947.8	1998.5	2013.4	2016.1
125°	2051.2	2084.1	2132.1	2149.7	2157.2
127.5°	2182.4	2217.8	2255.8	2281.0	2283.4
130°	2306.1	2346.6	2374.1	2402.0	2399.6
132.5°	2432.2	2465.2	2492.8	2515.6	2513.2
135°	2538.3	2578.8	2601.2	2626.7	2621.7
137.5°	2649.2	2679.4	2704.9	2730.1	2722.6
140°	2757.7	2778.0	2805.6	2828.4	2815.8
142.5°	2848.7	2866.4	2899.1	2919.1	2906.6
145°	2944.6	2941.9	2984.7	3002.5	2989.8
147.5°	3027.6	3020.1	3063.0	3075.6	3065.7
150°	3108.5	3090.8	3131.3	3146.3	3133.7
152.5°	3176.5	3156.4	3194.2	3209.5	3191.8
155°	3242.1	3219.6	3249.9	3264.9	3244.8
157.5°	3295.1	3275.1	3297.9	3315.5	3295.1
160°	3340.7	3325.4	3340.7	3355.7	3338.0
162.5°	3380.9	3365.9	3378.5	3396.1	3373.4
165°	3416.2	3401.2	3408.7	3426.4	3408.7
167.5°	3444.1	3428.8	3436.6	3454.2	3431.5
170°	3466.8	3451.6	3456.6	3474.3	3451.6
172.5°	3481.8	3466.8	3472.0	3489.6	3466.8
175°	3494.4	3476.7	3481.8	3499.5	3474.3
177.5°	3499.5	3481.8	3484.5	3502.2	3479.5
180°	3487.0	3487.0	3487.0	3487.0	3487.0

TEST NUMBER: P919763

CATALOG NUMBER: DFN2DIP-PN4F0-100D120US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.65	10.41	10.68	11.45	12.84	5.61	6.38	6.64	7.41	8.80
	3H	11.32	12.01	12.36	13.05	14.46	6.80	7.48	7.84	8.53	9.93
	4H	11.93	12.58	12.98	13.63	15.04	7.25	7.89	8.30	8.94	10.35
	6H	12.35	12.95	13.41	14.00	15.42	7.56	8.16	8.63	9.21	10.64
	8H	12.48	13.05	13.55	14.11	15.53	7.65	8.22	8.72	9.29	10.71
	12H	12.54	13.08	13.61	14.14	15.58	7.69	8.23	8.77	9.29	10.74
4H	2H	9.66	10.31	10.72	11.35	12.77	6.20	6.85	7.26	7.90	9.31
	3H	11.48	12.02	12.55	13.10	14.52	7.55	8.09	8.61	9.16	10.59
	4H	12.18	12.67	13.25	13.74	15.18	8.09	8.59	9.17	9.65	11.10
	6H	12.69	13.12	13.77	14.20	15.65	8.51	8.93	9.59	10.02	11.46
	8H	12.87	13.26	13.95	14.34	15.80	8.64	9.03	9.72	10.11	11.57
	12H	12.96	13.32	14.06	14.41	15.87	8.70	9.06	9.80	10.15	11.62
8H	4H	12.14	12.54	13.22	13.62	15.07	8.37	8.77	9.45	9.85	11.30
	6H	12.71	13.03	13.81	14.16	15.61	8.89	9.21	9.99	10.34	11.79
	8H	12.93	13.21	14.04	14.32	15.79	9.08	9.37	10.19	10.47	11.95
	12H	13.06	13.32	14.18	14.41	15.93	9.20	9.45	10.31	10.55	12.06
12H	4H	12.09	12.45	13.19	13.54	15.00	8.37	8.73	9.47	9.82	11.29
	6H	12.68	12.97	13.79	14.07	15.55	8.94	9.22	10.05	10.33	11.80
	8H	12.90	13.15	14.02	14.25	15.77	9.15	9.40	10.26	10.50	12.01