

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919827

Luminaire Tested: DFN2DIP-PN4F0-120D100US935-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919827
REPORT IS A COMBINATION OF REPORTS P901254 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D100US935-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17306.1 lumens
Efficiency: N/A
Efficacy: 86.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 201.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919827

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US935-RLLONL

Luminous Intensity Polar Plot

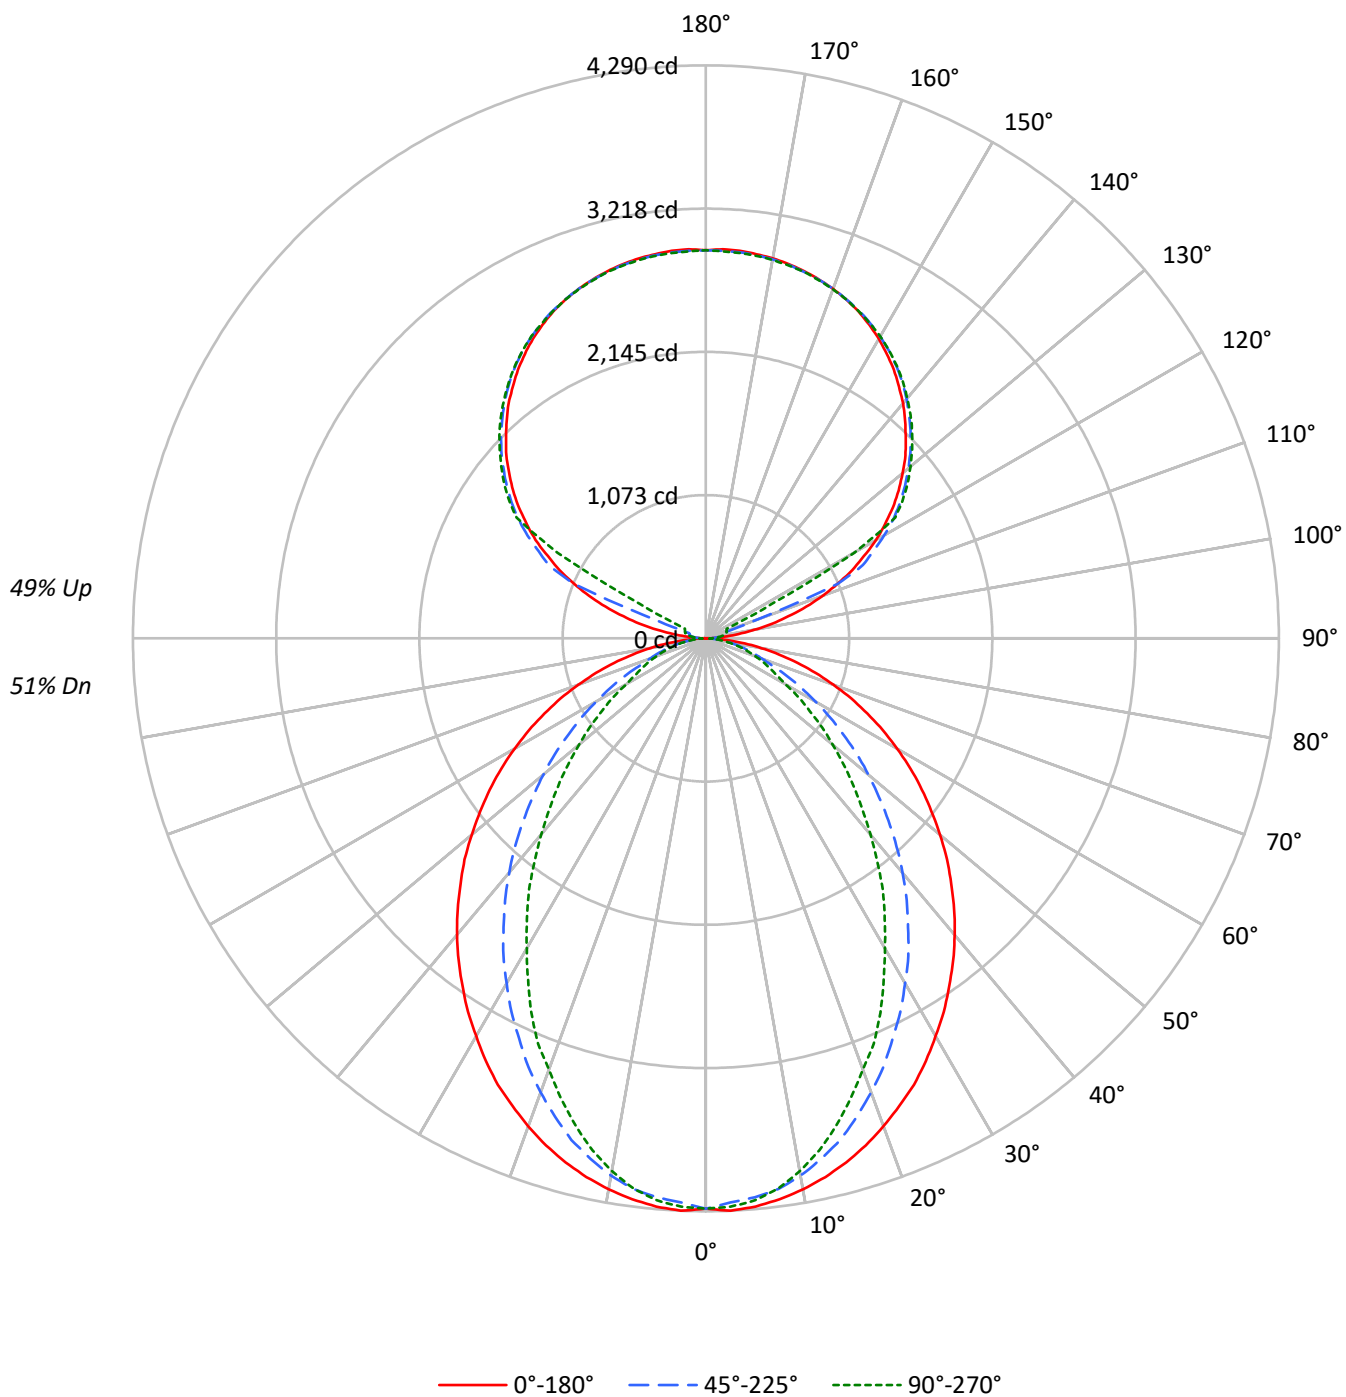

TEST NUMBER: P919827

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US935-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	107	107	107	107	99	99	99	99	84	84	84		70	70	70		57
1	98	94	91	87	91	87	84	81	74	72	70		62	61	59		51
2	90	83	77	72	83	77	72	67	66	62	59		55	52	50		45
3	82	73	66	61	76	68	62	57	58	54	50		49	46	43		41
4	76	65	58	52	70	61	54	49	52	47	43		44	40	37		37
5	70	58	50	45	64	54	47	42	47	41	37		40	36	33		33
6	64	53	45	39	59	49	42	37	42	37	33		36	32	29		30
7	60	48	40	34	55	45	38	33	39	33	29		33	29	26		28
8	55	43	36	31	51	41	34	29	35	30	26		30	26	23		26
9	52	40	32	27	48	37	31	26	32	27	23		28	24	21		24
10	48	36	29	25	45	34	28	24	30	25	21		26	22	19		22

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3117	3117	3117
5°	3122	3068	3088
10°	3091	3008	2988
15°	3049	2909	2833
20°	2992	2773	2643
25°	2935	2619	2459
30°	2857	2462	2226
35°	2781	2293	2021
40°	2704	2118	1786
45°	2614	1924	1573
50°	2522	1728	1366
55°	2425	1518	1166
60°	2313	1299	960
65°	2184	1076	865
70°	2028	868	783
75°	1831	767	714
80°	1547	644	621
85°	1078	433	471

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2614 cd/sqm

TEST NUMBER: P919827

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US935-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	400.2	2.3
10°-20°	1098.7	6.3
20°-30°	1542.5	8.9
30°-40°	1681.4	9.7
40°-50°	1545.4	8.9
50°-60°	1213.7	7.0
60°-70°	790.0	4.6
70°-80°	406.7	2.3
80°-90°	108.9	0.6
90°-100°	95.8	0.6
100°-110°	357.2	2.1
110°-120°	947.3	5.5
120°-130°	1571.2	9.1
130°-140°	1669.0	9.6
140°-150°	1551.1	9.0
150°-160°	1247.1	7.2
160°-170°	803.6	4.6
170°-180°	276.6	1.6
0°-30°	3041.3	17.6
0°-40°	4722.7	27.3
0°-60°	7481.7	43.2
0°-90°	8787.3	50.8
90°-120°	1400.3	8.1
90°-150°	6191.6	35.8
90°-180°	8519.0	49.2
0°-180°	17306.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4270	4270	4270	4270	4270	
5°	4270	4251	4200	4235	4224	405
15°	4062	4019	3888	3814	3776	1144
25°	3687	3563	3308	3150	3091	1696
35°	3177	2980	2640	2396	2311	1988
45°	2597	2338	1932	1658	1565	2006
55°	1975	1673	1256	1024	951	1764
65°	1333	1020	672	541	529	1322
75°	711	440	309	282	278	752
85°	166	85	73	73	73	191
90°	2	25	42	53	57	16
95°	137	67	82	93	90	162
105°	639	702	128	151	160	683
115°	1209	1245	1297	324	172	1190
125°	1709	1737	1777	1792	1798	1524
135°	2115	2149	2168	2189	2185	1634
145°	2454	2452	2487	2502	2492	1535
155°	2702	2683	2708	2721	2704	1245
165°	2847	2834	2841	2855	2841	804
175°	2912	2897	2902	2916	2895	277
180°	2906	2906	2906	2906	2906	

TEST NUMBER: P919827

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US935-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4270.2	4270.2	4270.2	4270.2	4270.2
2.5°	4289.5	4270.2	4227.6	4266.5	4258.7
5°	4270.2	4250.9	4200.5	4235.3	4223.9
7.5°	4235.3	4212.3	4158.3	4173.4	4154.1
10°	4189.0	4162.0	4084.8	4073.0	4050.0
12.5°	4131.2	4096.4	3991.8	3968.9	3926.2
15°	4061.5	4018.9	3887.7	3814.2	3775.7
17.5°	3980.3	3918.4	3756.0	3671.2	3609.3
20°	3887.7	3810.2	3617.1	3520.7	3435.4
22.5°	3787.2	3698.2	3474.0	3342.7	3285.0
25°	3686.8	3562.9	3307.9	3149.6	3091.4
27.5°	3567.0	3435.4	3153.3	2971.7	2882.7
30°	3439.5	3292.4	2983.2	2786.4	2681.8
32.5°	3315.7	3137.7	2821.2	2589.2	2492.4
35°	3176.7	2979.5	2639.6	2396.1	2310.7
37.5°	3041.4	2828.6	2469.4	2202.5	2106.2
40°	2898.3	2666.7	2291.5	2017.2	1916.8
42.5°	2751.5	2504.3	2114.0	1827.8	1731.5
45°	2596.9	2337.9	1932.3	1657.7	1564.9
47.5°	2450.1	2175.9	1758.5	1483.8	1398.9
50°	2287.8	2013.5	1588.4	1321.5	1240.7
52.5°	2129.2	1839.3	1426.0	1171.0	1097.6
55°	1974.6	1673.3	1255.9	1024.2	950.8
57.5°	1816.3	1507.2	1105.3	888.9	827.0
60°	1654.0	1344.8	946.7	749.9	688.0
62.5°	1495.7	1186.5	811.4	626.1	595.3
65°	1333.3	1020.1	672.4	541.2	529.3
67.5°	1178.8	865.5	541.2	475.2	463.7
70°	1016.4	715.1	448.1	409.6	394.0
72.5°	861.9	575.7	374.7	344.0	336.2
75°	710.9	440.3	309.2	282.1	278.4
77.5°	560.5	312.8	243.6	228.0	220.2
80°	421.1	224.3	185.3	170.1	170.1
82.5°	293.6	150.8	127.5	119.7	119.7
85°	166.1	84.9	73.4	73.4	73.4
87.5°	61.9	30.7	30.7	27.0	27.0
90°	2.0	25.2	41.9	52.7	56.7
92.5°	52.7	44.2	50.5	54.7	56.7
95°	136.6	67.2	81.9	92.6	90.4
97.5°	245.9	73.6	107.1	113.6	115.6
100°	372.3	84.1	119.9	136.6	140.9
102.5°	510.8	506.9	124.1	147.1	153.5
105°	639.2	702.3	128.4	151.3	159.8
107.5°	788.5	840.9	132.6	155.6	164.0
110°	931.5	975.5	368.0	157.8	166.0

TEST NUMBER: P919827

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US935-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1066.1	1103.8	1068.2	161.8	168.3
115°	1208.9	1244.7	1297.4	323.8	172.5
117.5°	1333.0	1375.0	1410.9	1110.1	559.3
120°	1471.9	1503.3	1541.3	1566.5	1282.6
122.5°	1589.5	1623.2	1665.3	1677.8	1680.1
125°	1709.3	1736.8	1776.8	1791.5	1797.7
127.5°	1818.7	1848.1	1879.8	1900.8	1902.8
130°	1921.7	1955.5	1978.5	2001.6	1999.7
132.5°	2026.9	2054.3	2077.3	2096.3	2094.3
135°	2115.3	2149.0	2167.7	2188.9	2184.7
137.5°	2207.7	2232.9	2254.1	2275.1	2268.8
140°	2298.0	2315.1	2338.0	2357.0	2346.5
142.5°	2373.9	2388.7	2415.9	2432.6	2422.2
145°	2453.8	2451.6	2487.3	2502.1	2491.6
147.5°	2523.0	2516.8	2552.4	2562.9	2554.8
150°	2590.4	2575.7	2609.4	2621.9	2611.4
152.5°	2647.1	2630.3	2661.9	2674.5	2659.8
155°	2701.8	2683.0	2708.3	2720.8	2704.0
157.5°	2746.0	2729.3	2748.2	2762.9	2746.0
160°	2784.0	2771.2	2784.0	2796.4	2781.7
162.5°	2817.4	2804.9	2815.4	2830.1	2811.2
165°	2846.8	2834.3	2840.6	2855.3	2840.6
167.5°	2870.1	2857.3	2863.9	2878.6	2859.5
170°	2889.0	2876.3	2880.6	2895.3	2876.3
172.5°	2901.5	2889.0	2893.3	2908.0	2889.0
175°	2912.0	2897.3	2901.5	2916.3	2895.3
177.5°	2916.3	2901.5	2903.8	2918.5	2899.5
180°	2905.8	2905.8	2905.8	2905.8	2905.8

TEST NUMBER: P919827

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US935-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.18	12.01	12.13	12.98	14.24	7.14	7.98	8.10	8.95	10.21
	3H	12.86	13.61	13.83	14.58	15.87	8.33	9.08	9.30	10.06	11.34
	4H	13.47	14.18	14.45	15.16	16.45	8.78	9.49	9.77	10.47	11.76
	6H	13.89	14.54	14.89	15.53	16.84	9.10	9.76	10.10	10.74	12.05
	8H	14.02	14.64	15.02	15.64	16.95	9.20	9.81	10.20	10.82	12.12
	12H	14.08	14.67	15.09	15.67	17.00	9.24	9.83	10.24	10.82	12.15
4H	2H	11.20	11.90	12.18	12.88	14.18	7.74	8.45	8.73	9.43	10.72
	3H	13.03	13.62	14.03	14.63	15.93	9.09	9.68	10.09	10.69	12.00
	4H	13.72	14.26	14.73	15.26	16.59	9.64	10.18	10.65	11.18	12.51
	6H	14.24	14.70	15.26	15.73	17.06	10.06	10.52	11.08	11.55	12.88
	8H	14.42	14.85	15.44	15.87	17.21	10.19	10.62	11.21	11.64	12.98
	12H	14.52	14.90	15.55	15.94	17.29	10.26	10.64	11.29	11.68	13.03
8H	4H	13.69	14.12	14.71	15.14	16.49	9.92	10.35	10.94	11.37	12.72
	6H	14.26	14.62	15.30	15.68	17.02	10.44	10.80	11.48	11.86	13.20
	8H	14.48	14.79	15.53	15.84	17.20	10.63	10.95	11.68	11.99	13.35
	12H	14.62	14.90	15.67	15.94	17.34	10.75	11.03	11.81	12.07	13.47
12H	4H	13.64	14.03	14.68	15.07	16.42	9.93	10.32	10.96	11.35	12.70
	6H	14.24	14.55	15.29	15.60	16.96	10.49	10.81	11.54	11.85	13.21
	8H	14.46	14.73	15.51	15.78	17.18	10.70	10.98	11.76	12.02	13.42

END OF REPORT