

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922322

Luminaire Tested: DFN2DIP-PN4F0-060D060US940-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P922322  
REPORT IS A COMBINATION OF REPORTS P899650 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-060D060US940-RLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 9282.7 lumens  
Efficiency: N/A  
Efficacy: 93.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 99.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P922322  
CATALOG NUMBER: DFN2DIP-PN4F0-060D060US940-RLLFLL

### Luminous Intensity Polar Plot

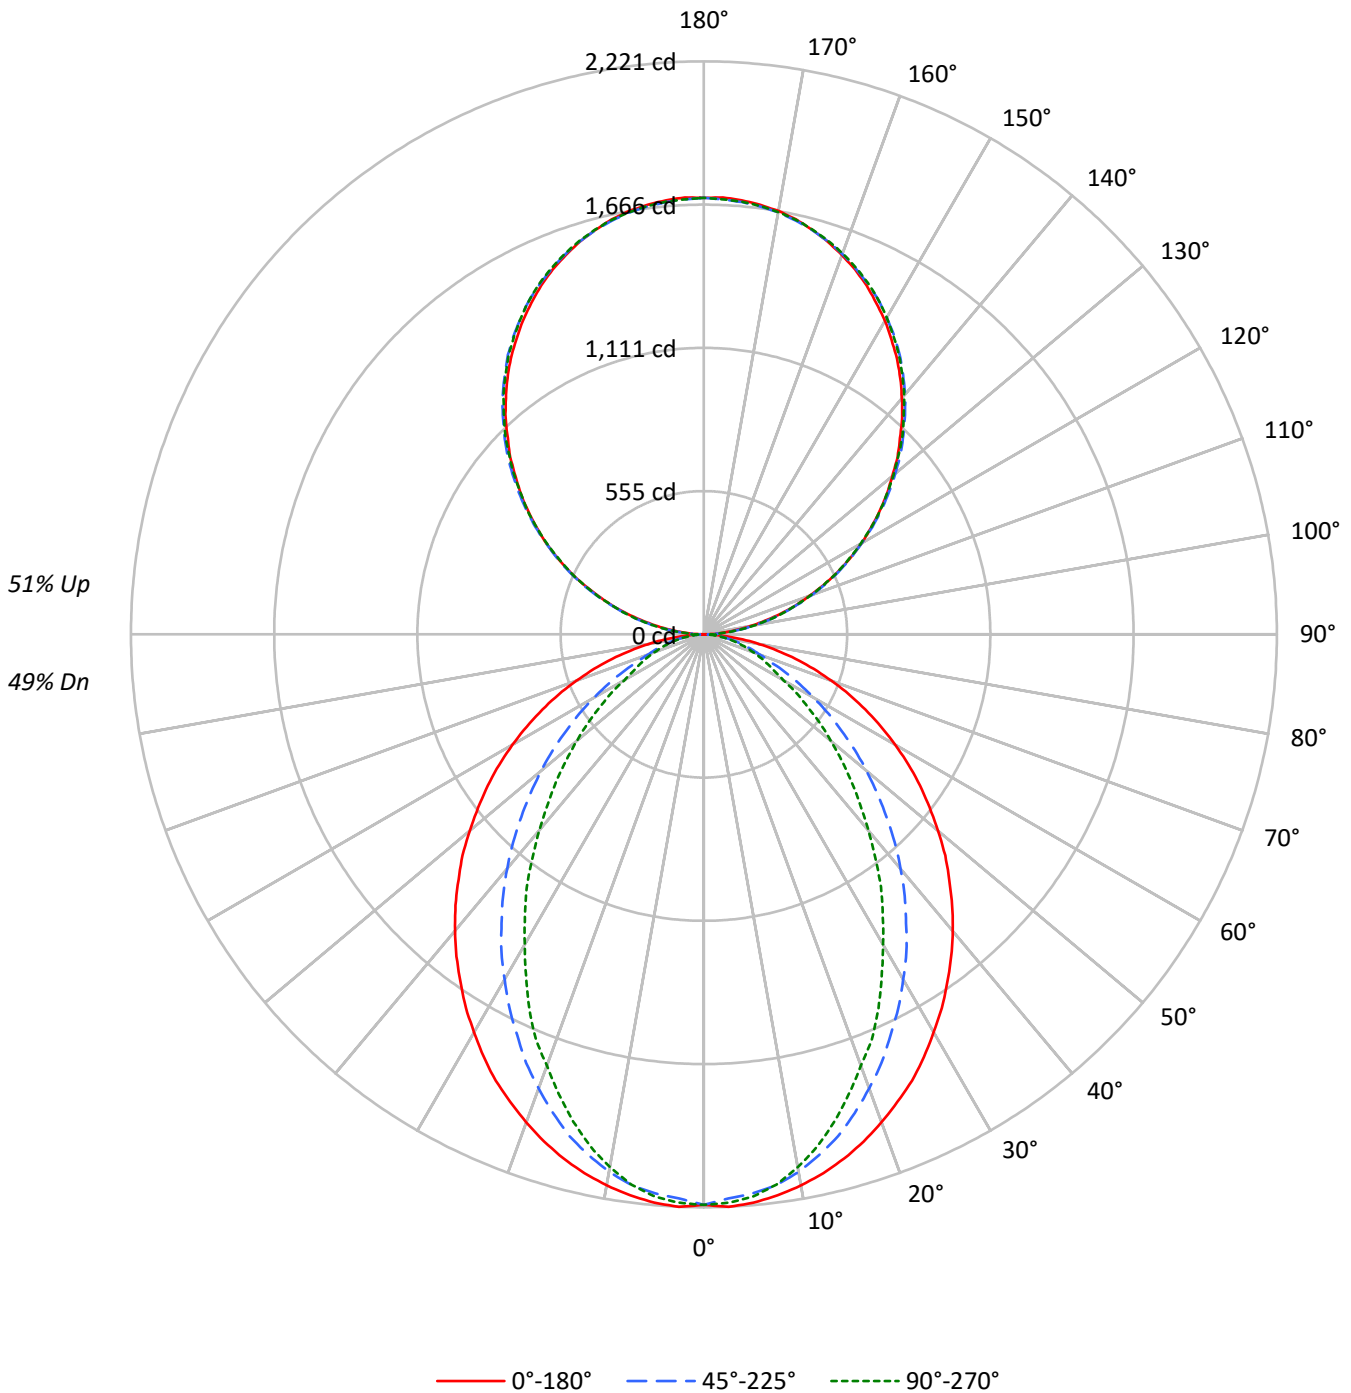



TEST NUMBER: P922322

CATALOG NUMBER: DFN2DIP-PN4F0-060D060US940-RLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55	49				49
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48	42				42
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41	36				36
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35	31				31
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31	27				27
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27	24				24
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24	21				21
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22	19				19
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20	17				17
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18	16				16
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16	14				14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1614	1614	1614
5°	1617	1589	1599
10°	1601	1558	1547
15°	1579	1506	1467
20°	1549	1436	1369
25°	1520	1356	1274
30°	1480	1275	1153
35°	1440	1187	1047
40°	1400	1097	925
45°	1354	996	815
50°	1306	895	707
55°	1256	786	604
60°	1198	673	497
65°	1131	557	448
70°	1050	450	406
75°	949	397	370
80°	801	333	322
85°	558	224	244

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1354 cd/sqm



TEST NUMBER: P922322

CATALOG NUMBER: DFN2DIP-PN4F0-060D060US940-RLFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	207.2	2.2
10°-20°	568.9	6.1
20°-30°	798.7	8.6
30°-40°	870.7	9.4
40°-50°	800.3	8.6
50°-60°	628.5	6.8
60°-70°	409.1	4.4
70°-80°	210.6	2.3
80°-90°	58.6	0.6
90°-100°	104.7	1.1
100°-110°	332.7	3.6
110°-120°	569.3	6.1
120°-130°	748.8	8.1
130°-140°	840.5	9.1
140°-150°	824.2	8.9
150°-160°	691.4	7.4
160°-170°	458.5	4.9
170°-180°	160.3	1.7
0°-30°	1574.9	17.0
0°-40°	2445.6	26.3
0°-60°	3874.3	41.7
0°-90°	4552.5	49.0
90°-120°	1006.7	10.8
90°-150°	3420.1	36.8
90°-180°	4730.0	51.0
0°-180°	9282.7	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2211	2211	2211	2211	2211	
5°	2211	2201	2175	2193	2187	210
15°	2103	2081	2013	1975	1955	593
25°	1909	1845	1713	1631	1601	878
35°	1645	1543	1367	1241	1197	1030
45°	1345	1211	1001	858	810	1039
55°	1022	866	650	530	492	914
65°	690	528	348	280	274	685
75°	368	228	160	146	144	389
85°	86	44	38	38	38	99
90°	2	18	50	47	48	9
95°	74	89	91	91	89	83
105°	307	311	314	317	317	324
115°	571	580	577	575	571	565
125°	831	844	840	835	834	743
135°	1075	1091	1094	1092	1088	831
145°	1305	1315	1323	1325	1319	815
155°	1492	1496	1501	1508	1503	687
165°	1623	1622	1622	1632	1625	458
175°	1689	1685	1682	1692	1683	160
180°	1692	1692	1692	1692	1692	



TEST NUMBER: P922322

CATALOG NUMBER: DFN2DIP-PN4F0-060D060US940-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2211.3	2211.3	2211.3	2211.3	2211.3
2.5°	2221.3	2211.3	2189.1	2209.3	2205.3
5°	2211.3	2201.3	2175.1	2193.3	2187.3
7.5°	2193.3	2181.3	2153.3	2161.1	2151.2
10°	2169.2	2155.2	2115.3	2109.2	2097.2
12.5°	2139.3	2121.2	2067.1	2055.2	2033.1
15°	2103.2	2081.1	2013.1	1975.1	1955.2
17.5°	2061.2	2029.1	1945.0	1901.0	1869.0
20°	2013.1	1973.0	1873.0	1823.1	1779.0
22.5°	1961.1	1915.0	1798.9	1731.0	1701.0
25°	1909.2	1845.0	1713.0	1631.0	1600.9
27.5°	1847.2	1779.0	1632.9	1538.8	1492.8
30°	1781.1	1704.9	1544.8	1442.9	1388.7
32.5°	1717.0	1624.9	1461.0	1340.8	1290.7
35°	1645.0	1542.9	1366.9	1240.7	1196.6
37.5°	1574.9	1464.7	1278.8	1140.6	1090.7
40°	1500.8	1380.9	1186.6	1044.5	992.6
42.5°	1424.9	1296.8	1094.7	946.5	896.6
45°	1344.8	1210.6	1000.7	858.4	810.4
47.5°	1268.8	1126.8	910.6	768.4	724.4
50°	1184.7	1042.7	822.5	684.3	642.5
52.5°	1102.5	952.4	738.4	606.4	568.4
55°	1022.5	866.5	650.3	530.4	492.3
57.5°	940.6	780.4	572.4	460.3	428.2
60°	856.5	696.4	490.3	388.3	356.2
62.5°	774.5	614.5	420.2	324.2	308.3
65°	690.5	528.2	348.2	280.3	274.1
67.5°	610.4	448.2	280.3	246.1	240.1
70°	526.3	370.2	232.0	212.1	204.0
72.5°	446.3	298.1	194.0	178.2	174.1
75°	368.2	228.0	160.1	146.1	144.2
77.5°	290.3	162.0	126.1	118.1	114.0
80°	218.0	116.1	95.9	88.1	88.1
82.5°	152.0	78.1	66.0	62.0	62.0
85°	86.0	44.0	38.0	38.0	38.0
87.5°	32.1	16.0	16.0	14.0	14.0
90°	1.5	18.4	50.0	46.9	48.4
92.5°	31.7	42.9	44.4	45.9	45.9
95°	74.5	88.7	91.3	91.3	88.7
97.5°	123.9	137.2	142.9	142.9	142.9
100°	181.1	192.8	196.9	196.9	195.4
102.5°	241.3	249.9	255.6	257.1	255.6
105°	307.1	311.2	314.2	316.8	316.8
107.5°	372.4	378.5	378.5	379.5	372.4
110°	435.7	443.8	443.8	443.8	439.7



TEST NUMBER: P922322

CATALOG NUMBER: DFN2DIP-PN4F0-060D060US940-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	504.0	512.6	511.1	507.0	504.0
115°	571.3	579.5	576.9	575.4	571.3
117.5°	638.2	649.4	642.2	638.2	634.1
120°	705.5	716.8	705.5	705.5	700.9
122.5°	766.7	781.0	773.8	769.8	766.7
125°	831.0	843.7	839.6	835.1	833.6
127.5°	893.8	909.5	903.9	897.9	893.8
130°	952.4	970.8	968.2	965.2	959.6
132.5°	1018.2	1032.5	1033.5	1026.4	1022.3
135°	1074.9	1090.7	1093.7	1092.2	1088.1
137.5°	1138.1	1150.8	1153.4	1152.4	1146.3
140°	1193.7	1206.5	1213.6	1213.6	1208.0
142.5°	1250.8	1263.6	1267.7	1269.2	1263.6
145°	1304.9	1315.1	1323.3	1324.8	1319.2
147.5°	1353.3	1366.1	1372.3	1374.7	1369.1
150°	1403.4	1412.0	1417.6	1422.2	1417.6
152.5°	1447.7	1456.4	1463.6	1469.2	1463.6
155°	1492.1	1496.2	1500.7	1508.0	1503.3
157.5°	1530.4	1533.5	1536.0	1546.2	1539.1
160°	1564.6	1567.6	1569.1	1577.8	1571.7
162.5°	1596.2	1596.2	1597.7	1607.4	1600.3
165°	1623.2	1621.7	1621.7	1631.9	1624.8
167.5°	1647.7	1643.2	1643.2	1653.3	1646.2
170°	1666.1	1662.0	1660.5	1670.6	1662.0
172.5°	1678.8	1674.7	1673.2	1683.4	1674.7
175°	1689.0	1685.0	1681.9	1692.1	1683.4
177.5°	1694.6	1690.6	1687.5	1696.1	1687.5
180°	1692.1	1692.1	1692.1	1692.1	1692.1



TEST NUMBER: P922322  
 CATALOG NUMBER: DFN2DIP-PN4F0-060D060US940-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.73	9.55	9.70	10.53	11.82	4.69	5.51	5.66	6.49	7.78
	3H	10.41	11.14	11.39	12.13	13.44	5.88	6.61	6.86	7.61	8.91
	4H	11.02	11.71	12.01	12.70	14.02	6.33	7.03	7.33	8.02	9.34
	6H	11.44	12.08	12.45	13.08	14.41	6.65	7.29	7.66	8.29	9.62
	8H	11.57	12.18	12.58	13.19	14.52	6.74	7.35	7.76	8.37	9.69
	12H	11.63	12.21	12.65	13.22	14.57	6.79	7.36	7.80	8.37	9.72
4H	2H	8.74	9.44	9.75	10.43	11.75	5.29	5.98	6.29	6.98	8.29
	3H	10.57	11.15	11.59	12.18	13.51	6.64	7.22	7.65	8.24	9.57
	4H	11.27	11.80	12.29	12.81	14.17	7.19	7.71	8.20	8.73	10.08
	6H	11.79	12.24	12.82	13.28	14.63	7.61	8.06	8.64	9.10	10.45
	8H	11.96	12.39	12.99	13.42	14.78	7.73	8.16	8.77	9.19	10.56
	12H	12.06	12.44	13.11	13.49	14.86	7.80	8.18	8.85	9.23	10.60
8H	4H	11.24	11.66	12.27	12.69	14.06	7.47	7.89	8.50	8.92	10.29
	6H	11.80	12.15	12.86	13.23	14.59	7.99	8.34	9.04	9.41	10.77
	8H	12.02	12.33	13.09	13.39	14.77	8.18	8.49	9.24	9.54	10.93
	12H	12.16	12.43	13.23	13.49	14.91	8.30	8.57	9.36	9.62	11.05
12H	4H	11.19	11.57	12.24	12.62	13.99	7.47	7.85	8.52	8.90	10.27
	6H	11.78	12.09	12.84	13.15	14.53	8.04	8.34	9.10	9.40	10.79
	8H	12.00	12.27	13.07	13.33	14.75	8.25	8.52	9.31	9.57	11.00