

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922360

Luminaire Tested: DFN2DIP-PN4F0-070D070US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922360
REPORT IS A COMBINATION OF REPORTS P899669 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D070US940-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 11703.8 lumens
Efficiency: N/A
Efficacy: 98.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 119.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922360
CATALOG NUMBER: DFN2DIP-PN4F0-070D070US940-FLLFLL

Luminous Intensity Polar Plot

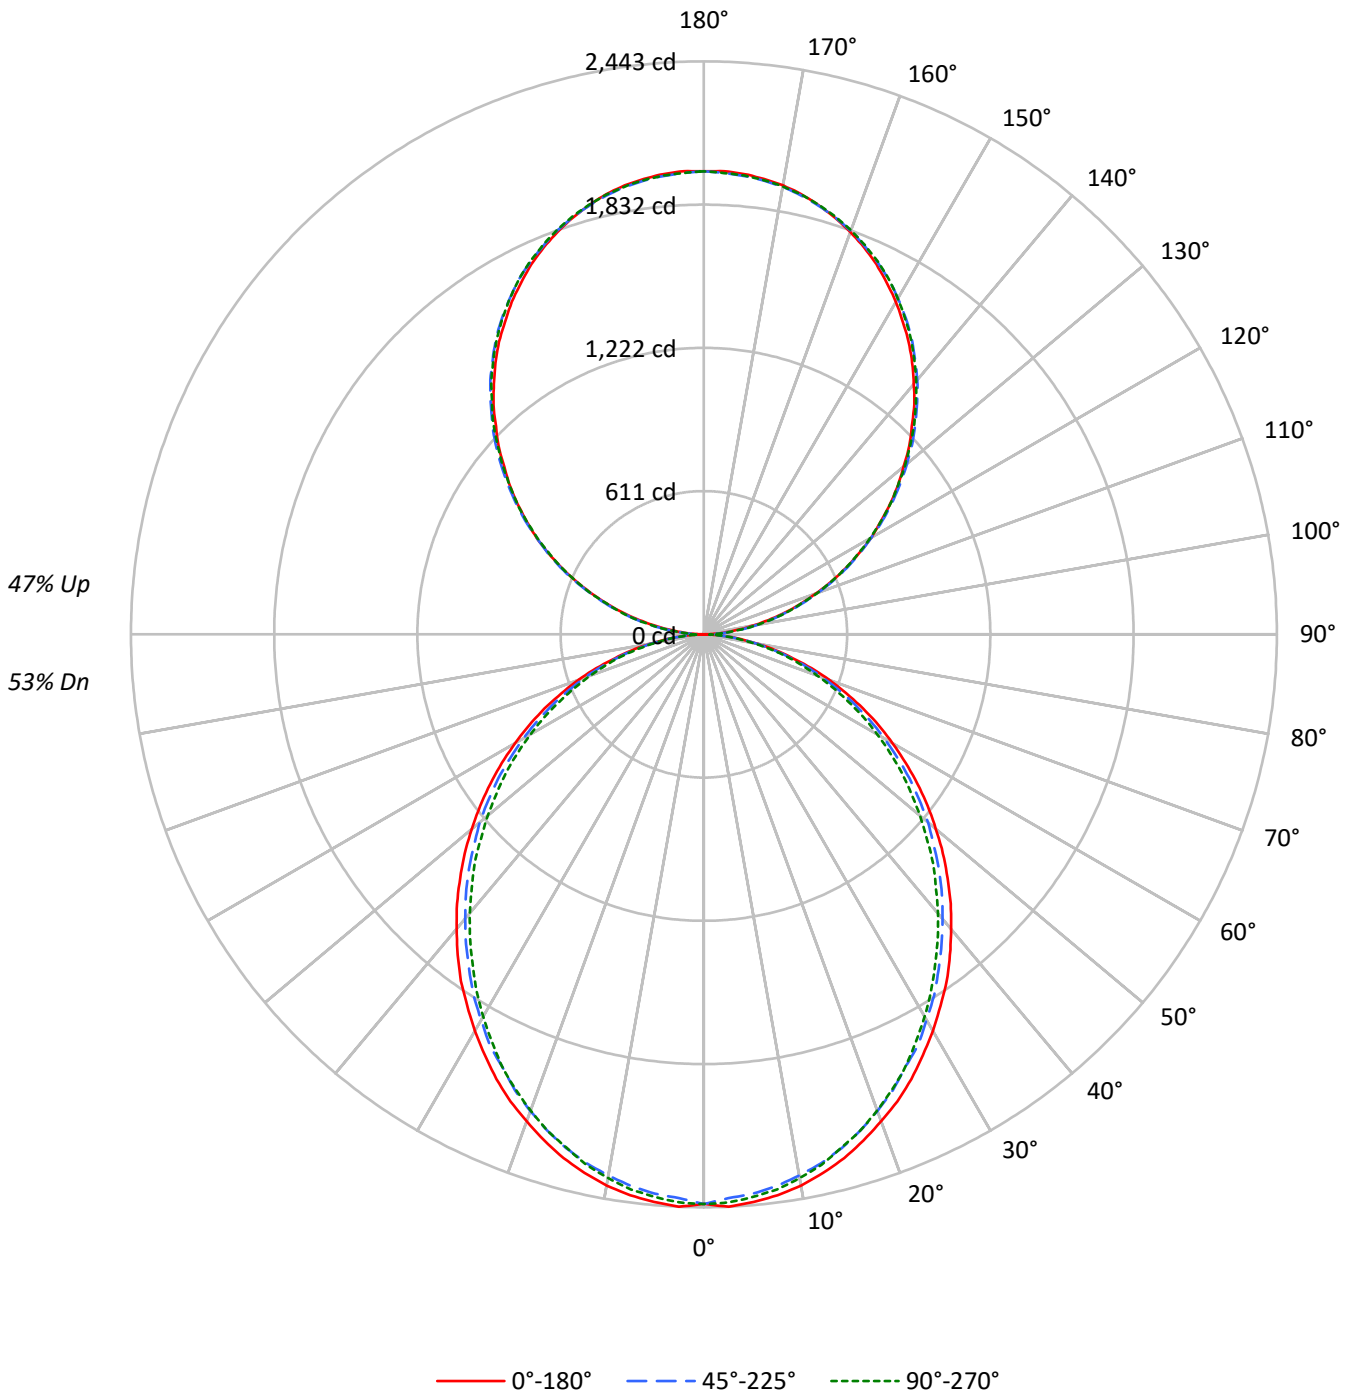



TEST NUMBER: P922360

CATALOG NUMBER: DFN2DIP-PN4F0-070D070US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1773	1773	1773
5°	1776	1748	1760
10°	1761	1725	1737
15°	1735	1697	1700
20°	1700	1658	1662
25°	1666	1611	1618
30°	1622	1567	1563
35°	1581	1516	1504
40°	1530	1463	1448
45°	1479	1411	1390
50°	1424	1357	1324
55°	1365	1293	1263
60°	1300	1218	1193
65°	1228	1140	1110
70°	1137	1045	1022
75°	1011	932	941
80°	858	788	784
85°	621	538	525

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 1545 cd/sqm



TEST NUMBER: P922360

CATALOG NUMBER: DFN2DIP-PN4F0-070D070US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	228.6	2.0
10°-20°	643.2	5.5
20°-30°	945.2	8.1
30°-40°	1097.8	9.4
40°-50°	1096.5	9.4
50°-60°	956.1	8.2
60°-70°	706.8	6.0
70°-80°	399.9	3.4
80°-90°	111.2	0.9
90°-100°	122.2	1.0
100°-110°	388.1	3.3
110°-120°	664.2	5.7
120°-130°	873.6	7.5
130°-140°	980.5	8.4
140°-150°	961.5	8.2
150°-160°	806.6	6.9
160°-170°	534.9	4.6
170°-180°	187.0	1.6
0°-30°	1817.0	15.5
0°-40°	2914.9	24.9
0°-60°	4967.4	42.4
0°-90°	6185.2	52.8
90°-120°	1174.5	10.0
90°-150°	3990.1	34.1
90°-180°	5519.0	47.2
0°-180°	11703.8	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2429	2429	2429	2429	2429	
5°	2429	2420	2394	2412	2408	231
15°	2312	2298	2268	2277	2266	651
25°	2093	2074	2034	2039	2034	963
35°	1805	1782	1745	1730	1719	1127
45°	1469	1453	1418	1392	1383	1134
55°	1112	1098	1070	1042	1030	994
65°	750	736	712	691	680	741
75°	392	388	376	362	367	419
85°	96	94	91	84	82	107
90°	2	21	58	55	56	11
95°	87	104	107	107	104	97
105°	358	363	367	370	370	378
115°	667	676	673	671	667	659
125°	970	984	980	974	972	866
135°	1254	1272	1276	1274	1269	969
145°	1522	1534	1544	1546	1539	951
155°	1741	1746	1751	1759	1754	801
165°	1894	1892	1892	1904	1896	534
175°	1970	1966	1962	1974	1964	187
180°	1974	1974	1974	1974	1974	



TEST NUMBER: P922360

CATALOG NUMBER: DFN2DIP-PN4F0-070D070US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2428.8	2428.8	2428.8	2428.8	2428.8
2.5°	2442.9	2431.2	2405.5	2428.8	2424.3
5°	2428.8	2419.7	2393.9	2412.4	2408.0
7.5°	2412.4	2398.5	2372.8	2391.7	2386.9
10°	2386.9	2370.5	2342.5	2361.2	2354.2
12.5°	2351.7	2337.9	2309.9	2321.5	2316.8
15°	2312.1	2298.2	2267.7	2277.2	2265.5
17.5°	2263.0	2249.2	2218.7	2230.3	2218.7
20°	2209.2	2195.4	2162.7	2169.6	2160.4
22.5°	2155.7	2134.7	2104.2	2104.2	2099.4
25°	2092.6	2073.9	2034.3	2038.8	2034.3
27.5°	2022.4	2006.1	1975.9	1968.9	1957.2
30°	1952.6	1933.7	1898.8	1891.9	1882.4
32.5°	1877.7	1863.9	1826.4	1812.3	1802.9
35°	1805.4	1782.1	1744.6	1730.5	1718.9
37.5°	1723.6	1702.5	1665.1	1648.8	1637.1
40°	1639.6	1620.8	1583.3	1562.5	1553.1
42.5°	1557.8	1539.0	1501.8	1478.3	1464.4
45°	1469.1	1452.8	1417.6	1392.0	1382.6
47.5°	1382.6	1366.3	1328.8	1303.1	1289.2
50°	1291.5	1279.8	1247.1	1214.4	1202.7
52.5°	1202.7	1186.4	1156.2	1130.4	1114.0
55°	1111.8	1097.7	1069.7	1041.7	1030.0
57.5°	1020.7	1009.0	978.5	950.5	941.1
60°	929.4	920.2	887.6	861.8	854.9
62.5°	840.7	824.4	801.1	777.8	768.4
65°	749.8	735.7	712.4	691.3	679.7
67.5°	656.4	644.5	623.7	607.3	597.9
70°	569.9	560.5	539.4	523.1	513.9
72.5°	481.2	471.8	460.1	443.8	436.8
75°	392.3	387.8	375.9	362.0	366.8
77.5°	313.0	303.5	298.8	291.9	285.0
80°	233.6	231.2	226.5	219.5	214.8
82.5°	158.8	158.8	156.6	147.2	147.2
85°	95.7	93.5	91.2	84.0	81.8
87.5°	42.1	37.5	32.7	25.8	23.3
90°	1.8	21.4	58.3	54.8	56.5
92.5°	36.9	50.0	51.8	53.6	53.6
95°	86.9	103.5	106.6	106.6	103.5
97.5°	144.6	160.1	166.7	166.7	166.7
100°	211.2	225.0	229.7	229.7	227.9
102.5°	281.5	291.6	298.2	300.0	298.2
105°	358.3	363.0	366.6	369.6	369.6
107.5°	434.4	441.6	441.6	442.8	434.4
110°	508.3	517.8	517.8	517.8	513.0



TEST NUMBER: P922360

CATALOG NUMBER: DFN2DIP-PN4F0-070D070US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.0	598.2	596.4	591.6	588.0
115°	666.6	676.1	673.2	671.4	666.6
117.5°	744.5	757.6	749.3	744.5	739.8
120°	823.0	836.2	823.0	823.0	817.7
122.5°	894.5	911.1	902.9	898.0	894.5
125°	969.5	984.4	979.6	974.3	972.5
127.5°	1042.7	1061.1	1054.6	1047.5	1042.7
130°	1111.2	1132.6	1129.6	1126.1	1119.5
132.5°	1187.9	1204.6	1205.8	1197.5	1192.7
135°	1254.0	1272.4	1276.0	1274.2	1269.4
137.5°	1327.8	1342.6	1345.6	1344.4	1337.3
140°	1392.7	1407.6	1415.9	1415.9	1409.3
142.5°	1459.3	1474.2	1478.9	1480.7	1474.2
145°	1522.4	1534.3	1543.8	1545.6	1539.1
147.5°	1579.0	1593.8	1601.0	1603.9	1597.4
150°	1637.3	1647.3	1653.9	1659.3	1653.9
152.5°	1689.0	1699.2	1707.4	1714.0	1707.4
155°	1740.8	1745.5	1751.0	1759.3	1753.9
157.5°	1785.5	1789.0	1792.0	1803.9	1795.5
160°	1825.3	1828.9	1830.7	1840.8	1833.6
162.5°	1862.2	1862.2	1864.0	1875.3	1867.0
165°	1893.7	1891.9	1891.9	1903.9	1895.5
167.5°	1922.3	1917.0	1917.0	1928.9	1920.6
170°	1943.8	1939.0	1937.2	1949.1	1939.0
172.5°	1958.6	1953.8	1952.0	1964.0	1953.8
175°	1970.5	1965.8	1962.2	1974.1	1964.0
177.5°	1977.1	1972.3	1968.7	1978.9	1968.7
180°	1974.1	1974.1	1974.1	1974.1	1974.1



TEST NUMBER: P922360
 CATALOG NUMBER: DFN2DIP-PN4F0-070D070US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.53	10.41	10.46	11.36	12.59	9.09	9.97	10.02	10.92	12.15
	3H	11.19	11.99	12.14	12.95	14.20	10.71	11.50	11.65	12.46	13.72
	4H	11.78	12.54	12.74	13.50	14.76	11.30	12.05	12.25	13.01	14.27
	6H	12.19	12.88	13.16	13.85	15.12	11.69	12.39	12.66	13.36	14.63
	8H	12.29	12.95	13.27	13.94	15.21	11.80	12.46	12.78	13.45	14.72
	12H	12.34	12.97	13.32	13.95	15.25	11.84	12.47	12.82	13.45	14.75
4H	2H	9.99	10.74	10.96	11.71	12.97	9.64	10.39	10.60	11.36	12.62
	3H	11.86	12.49	12.84	13.49	14.76	11.46	12.09	12.43	13.08	14.36
	4H	12.58	13.16	13.56	14.14	15.44	12.16	12.74	13.15	13.72	15.02
	6H	13.10	13.60	14.09	14.61	15.90	12.68	13.17	13.67	14.18	15.48
	8H	13.25	13.71	14.25	14.72	16.03	12.82	13.29	13.82	14.29	15.60
	12H	13.33	13.75	14.34	14.77	16.08	12.89	13.31	13.90	14.32	15.64
8H	4H	12.78	13.24	13.78	14.25	15.56	12.41	12.87	13.40	13.87	15.19
	6H	13.42	13.80	14.44	14.84	16.15	13.04	13.42	14.06	14.47	15.78
	8H	13.64	13.98	14.67	15.01	16.34	13.25	13.59	14.28	14.62	15.95
	12H	13.77	14.07	14.81	15.10	16.47	13.37	13.67	14.40	14.69	16.07
12H	4H	12.77	13.18	13.78	14.20	15.52	12.40	12.82	13.42	13.84	15.16
	6H	13.45	13.78	14.47	14.82	16.15	13.08	13.42	14.11	14.45	15.78
	8H	13.69	13.99	14.72	15.01	16.39	13.32	13.62	14.35	14.64	16.02