

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922396

Luminaire Tested: DFN2DIP-PN4F0-080D070US940-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P922396  
REPORT IS A COMBINATION OF REPORTS P899671 AND P896497  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-PN4F0-080D070US940-FLLFLL  
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 12586.6 lumens  
Efficiency: N/A  
Efficacy: 97.0 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 129.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9971  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P922396  
CATALOG NUMBER: DFN2DIP-PN4F0-080D070US940-FLLFLL

### Luminous Intensity Polar Plot

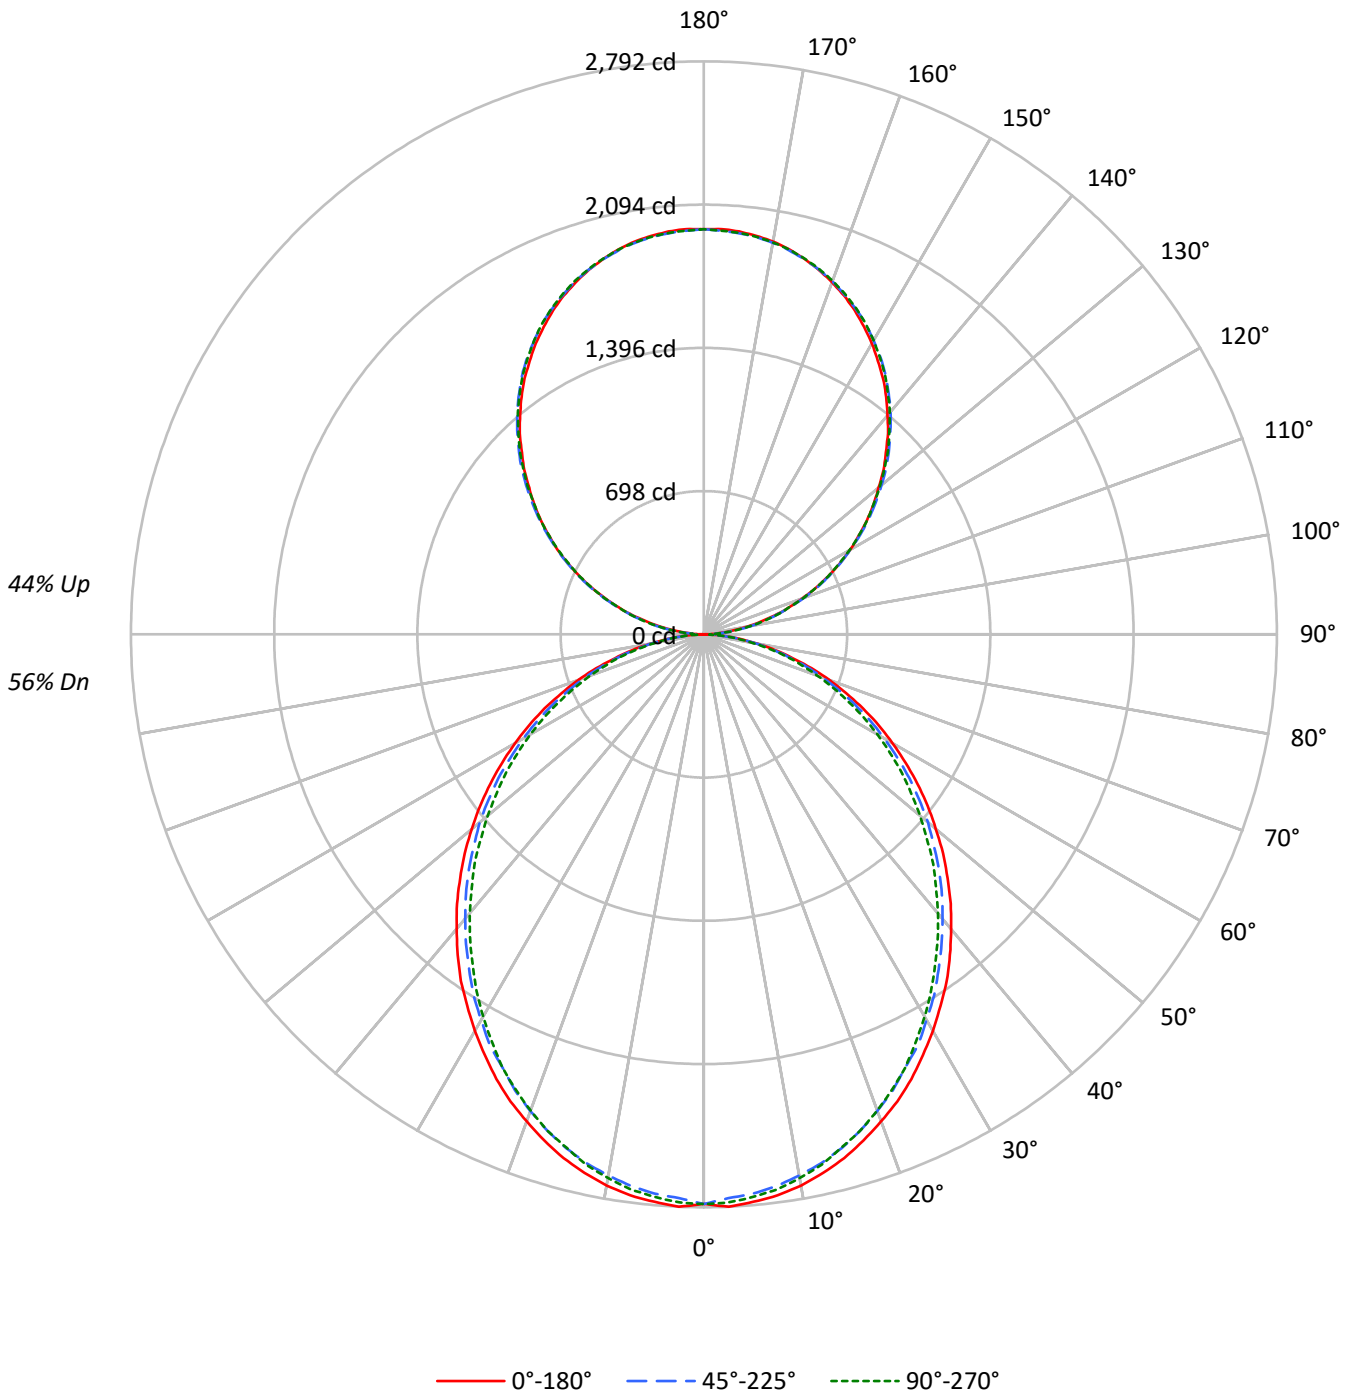



TEST NUMBER: P922396

CATALOG NUMBER: DFN2DIP-PN4F0-080D070US940-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	62	62	62	56	56	56	56
1	99	95	91	87	92	88	85	82	76	74	71	65	63	61	55	53	52	47	47	47	47
2	90	83	77	71	84	77	72	67	67	63	59	57	54	51	48	46	44	40	40	40	40
3	82	73	65	59	76	68	61	56	59	54	50	50	47	43	43	40	37	34	34	34	34
4	75	64	56	50	70	60	53	48	52	47	42	45	41	37	38	35	32	29	29	29	29
5	69	57	49	43	64	54	46	41	47	41	37	40	36	32	34	31	28	25	25	25	25
6	64	52	43	38	59	48	41	36	42	36	32	37	32	28	31	28	25	22	22	22	22
7	59	47	39	33	55	44	37	31	38	32	28	33	29	25	28	25	22	20	20	20	20
8	55	42	35	29	51	40	33	28	35	29	25	30	26	22	26	23	20	17	17	17	17
9	51	39	31	26	47	36	30	25	32	26	23	28	23	20	24	21	18	16	16	16	16
10	48	36	28	23	44	34	27	22	30	24	20	26	21	18	22	19	16	14	14	14	14

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2026	2026	2026
5°	2029	1998	2012
10°	2013	1972	1985
15°	1983	1939	1943
20°	1943	1895	1900
25°	1904	1841	1850
30°	1854	1791	1786
35°	1806	1732	1718
40°	1748	1673	1654
45°	1690	1613	1589
50°	1627	1550	1513
55°	1560	1478	1443
60°	1485	1392	1363
65°	1404	1303	1269
70°	1299	1195	1168
75°	1155	1065	1075
80°	981	900	896
85°	709	614	600

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 1690 cd/sqm



TEST NUMBER: P922396

CATALOG NUMBER: DFN2DIP-PN4F0-080D070US940-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	261.3	2.1
10°-20°	735.1	5.8
20°-30°	1080.3	8.6
30°-40°	1254.7	10.0
40°-50°	1253.1	10.0
50°-60°	1092.7	8.7
60°-70°	807.7	6.4
70°-80°	457.0	3.6
80°-90°	126.2	1.0
90°-100°	122.2	1.0
100°-110°	388.1	3.1
110°-120°	664.2	5.3
120°-130°	873.6	6.9
130°-140°	980.5	7.8
140°-150°	961.5	7.6
150°-160°	806.6	6.4
160°-170°	534.9	4.2
170°-180°	187.0	1.5
0°-30°	2076.6	16.5
0°-40°	3331.3	26.5
0°-60°	5677.0	45.1
0°-90°	7068.0	56.2
90°-120°	1174.5	9.3
90°-150°	3990.1	31.7
90°-180°	5519.0	43.8
0°-180°	12586.6	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2776	2776	2776	2776	2776	
5°	2776	2765	2736	2757	2752	263
15°	2642	2626	2592	2602	2589	744
25°	2392	2370	2325	2330	2325	1100
35°	2063	2037	1994	1978	1964	1288
45°	1679	1660	1620	1591	1580	1296
55°	1271	1254	1222	1190	1177	1136
65°	857	841	814	790	777	847
75°	448	443	430	414	419	479
85°	109	107	104	96	94	122
90°	2	21	58	55	56	12
95°	87	104	107	107	104	97
105°	358	363	367	370	370	378
115°	667	676	673	671	667	659
125°	970	984	980	974	972	866
135°	1254	1272	1276	1274	1269	969
145°	1522	1534	1544	1546	1539	951
155°	1741	1746	1751	1759	1754	801
165°	1894	1892	1892	1904	1896	534
175°	1970	1966	1962	1974	1964	187
180°	1974	1974	1974	1974	1974	



TEST NUMBER: P922396

CATALOG NUMBER: DFN2DIP-PN4F0-080D070US940-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2775.7	2775.7	2775.7	2775.7	2775.7
2.5°	2791.9	2778.6	2749.1	2775.7	2770.6
5°	2775.7	2765.3	2735.9	2757.1	2752.0
7.5°	2757.1	2741.2	2711.8	2733.3	2727.9
10°	2727.9	2709.2	2677.2	2698.4	2690.6
12.5°	2687.7	2671.8	2639.8	2653.1	2647.8
15°	2642.4	2626.5	2591.7	2602.5	2589.2
17.5°	2586.3	2570.4	2535.6	2549.0	2535.6
20°	2524.9	2509.0	2471.6	2479.6	2469.1
22.5°	2463.7	2439.6	2404.8	2404.8	2399.4
25°	2391.5	2370.3	2325.0	2330.0	2325.0
27.5°	2311.3	2292.7	2258.1	2250.1	2236.9
30°	2231.5	2209.9	2170.1	2162.1	2151.3
32.5°	2146.0	2130.1	2087.3	2071.2	2060.5
35°	2063.2	2036.7	1993.9	1977.7	1964.4
37.5°	1969.8	1945.7	1903.0	1884.3	1871.0
40°	1873.8	1852.3	1809.5	1785.7	1774.9
42.5°	1780.4	1758.8	1716.4	1689.4	1673.7
45°	1679.0	1660.3	1620.1	1590.9	1580.2
47.5°	1580.2	1561.5	1518.7	1489.2	1473.4
50°	1476.0	1462.7	1425.2	1387.9	1374.6
52.5°	1374.6	1355.8	1321.3	1291.9	1273.2
55°	1270.6	1254.5	1222.5	1190.5	1177.1
57.5°	1166.4	1153.2	1118.3	1086.3	1075.5
60°	1062.2	1051.8	1014.3	984.9	977.0
62.5°	960.8	942.2	915.5	888.9	878.2
65°	856.9	840.8	814.1	790.1	776.8
67.5°	750.1	736.6	712.7	694.1	683.3
70°	651.3	640.5	616.5	597.8	587.3
72.5°	549.9	539.2	525.8	507.2	499.3
75°	448.3	443.2	429.6	413.8	419.1
77.5°	357.7	346.9	341.5	333.6	325.7
80°	267.1	264.2	258.9	250.9	245.5
82.5°	181.6	181.6	179.0	168.2	168.2
85°	109.3	106.7	104.2	96.0	93.5
87.5°	48.2	42.8	37.4	29.4	26.7
90°	1.8	21.4	58.3	54.8	56.5
92.5°	36.9	50.0	51.8	53.6	53.6
95°	86.9	103.5	106.6	106.6	103.5
97.5°	144.6	160.1	166.7	166.7	166.7
100°	211.2	225.0	229.7	229.7	227.9
102.5°	281.5	291.6	298.2	300.0	298.2
105°	358.3	363.0	366.6	369.6	369.6
107.5°	434.4	441.6	441.6	442.8	434.4
110°	508.3	517.8	517.8	517.8	513.0



TEST NUMBER: P922396

CATALOG NUMBER: DFN2DIP-PN4F0-080D070US940-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	588.0	598.2	596.4	591.6	588.0
115°	666.6	676.1	673.2	671.4	666.6
117.5°	744.5	757.6	749.3	744.5	739.8
120°	823.0	836.2	823.0	823.0	817.7
122.5°	894.5	911.1	902.9	898.0	894.5
125°	969.5	984.4	979.6	974.3	972.5
127.5°	1042.7	1061.1	1054.6	1047.5	1042.7
130°	1111.2	1132.6	1129.6	1126.1	1119.5
132.5°	1187.9	1204.6	1205.8	1197.5	1192.7
135°	1254.0	1272.4	1276.0	1274.2	1269.4
137.5°	1327.8	1342.6	1345.6	1344.4	1337.3
140°	1392.7	1407.6	1415.9	1415.9	1409.3
142.5°	1459.3	1474.2	1478.9	1480.7	1474.2
145°	1522.4	1534.3	1543.8	1545.6	1539.1
147.5°	1579.0	1593.8	1601.0	1603.9	1597.4
150°	1637.3	1647.3	1653.9	1659.3	1653.9
152.5°	1689.0	1699.2	1707.4	1714.0	1707.4
155°	1740.8	1745.5	1751.0	1759.3	1753.9
157.5°	1785.5	1789.0	1792.0	1803.9	1795.5
160°	1825.3	1828.9	1830.7	1840.8	1833.6
162.5°	1862.2	1862.2	1864.0	1875.3	1867.0
165°	1893.7	1891.9	1891.9	1903.9	1895.5
167.5°	1922.3	1917.0	1917.0	1928.9	1920.6
170°	1943.8	1939.0	1937.2	1949.1	1939.0
172.5°	1958.6	1953.8	1952.0	1964.0	1953.8
175°	1970.5	1965.8	1962.2	1974.1	1964.0
177.5°	1977.1	1972.3	1968.7	1978.9	1968.7
180°	1974.1	1974.1	1974.1	1974.1	1974.1



TEST NUMBER: P922396  
 CATALOG NUMBER: DFN2DIP-PN4F0-080D070US940-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.28	11.20	11.18	12.12	13.30	9.84	10.76	10.74	11.68	12.86
	3H	11.95	12.77	12.86	13.71	14.91	11.46	12.29	12.38	13.22	14.43
	4H	12.54	13.32	13.47	14.26	15.47	12.05	12.83	12.98	13.77	14.98
	6H	12.95	13.67	13.89	14.61	15.84	12.45	13.17	13.39	14.12	15.34
	8H	13.05	13.74	14.00	14.70	15.92	12.56	13.25	13.51	14.21	15.43
	12H	13.11	13.76	14.06	14.71	15.96	12.61	13.26	13.56	14.21	15.46
4H	2H	10.75	11.53	11.68	12.47	13.68	10.40	11.18	11.33	12.12	13.33
	3H	12.62	13.28	13.57	14.24	15.47	12.22	12.87	13.17	13.84	15.07
	4H	13.34	13.94	14.30	14.90	16.15	12.93	13.52	13.88	14.48	15.74
	6H	13.86	14.38	14.83	15.36	16.62	13.44	13.95	14.41	14.94	16.19
	8H	14.02	14.50	14.99	15.48	16.74	13.59	14.07	14.56	15.05	16.31
	12H	14.09	14.53	15.08	15.52	16.80	13.65	14.09	14.64	15.08	16.35
8H	4H	13.54	14.02	14.51	15.00	16.27	13.17	13.65	14.14	14.63	15.90
	6H	14.18	14.58	15.18	15.60	16.86	13.81	14.20	14.80	15.22	16.49
	8H	14.41	14.76	15.41	15.76	17.05	14.02	14.37	15.02	15.38	16.66
	12H	14.54	14.85	15.55	15.85	17.18	14.14	14.45	15.15	15.45	16.78
12H	4H	13.53	13.97	14.52	14.96	16.23	13.17	13.60	14.16	14.60	15.87
	6H	14.21	14.56	15.22	15.57	16.86	13.85	14.20	14.85	15.21	16.49
	8H	14.46	14.77	15.47	15.77	17.10	14.09	14.40	15.09	15.40	16.73