

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922449

Luminaire Tested: DFN2DIP-PN4F0-090D110US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922449
REPORT IS A COMBINATION OF REPORTS P901265 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-090D110US940-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17655.9 lumens
Efficiency: N/A
Efficacy: 98.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 180
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922449

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-FLLONL

Luminous Intensity Polar Plot

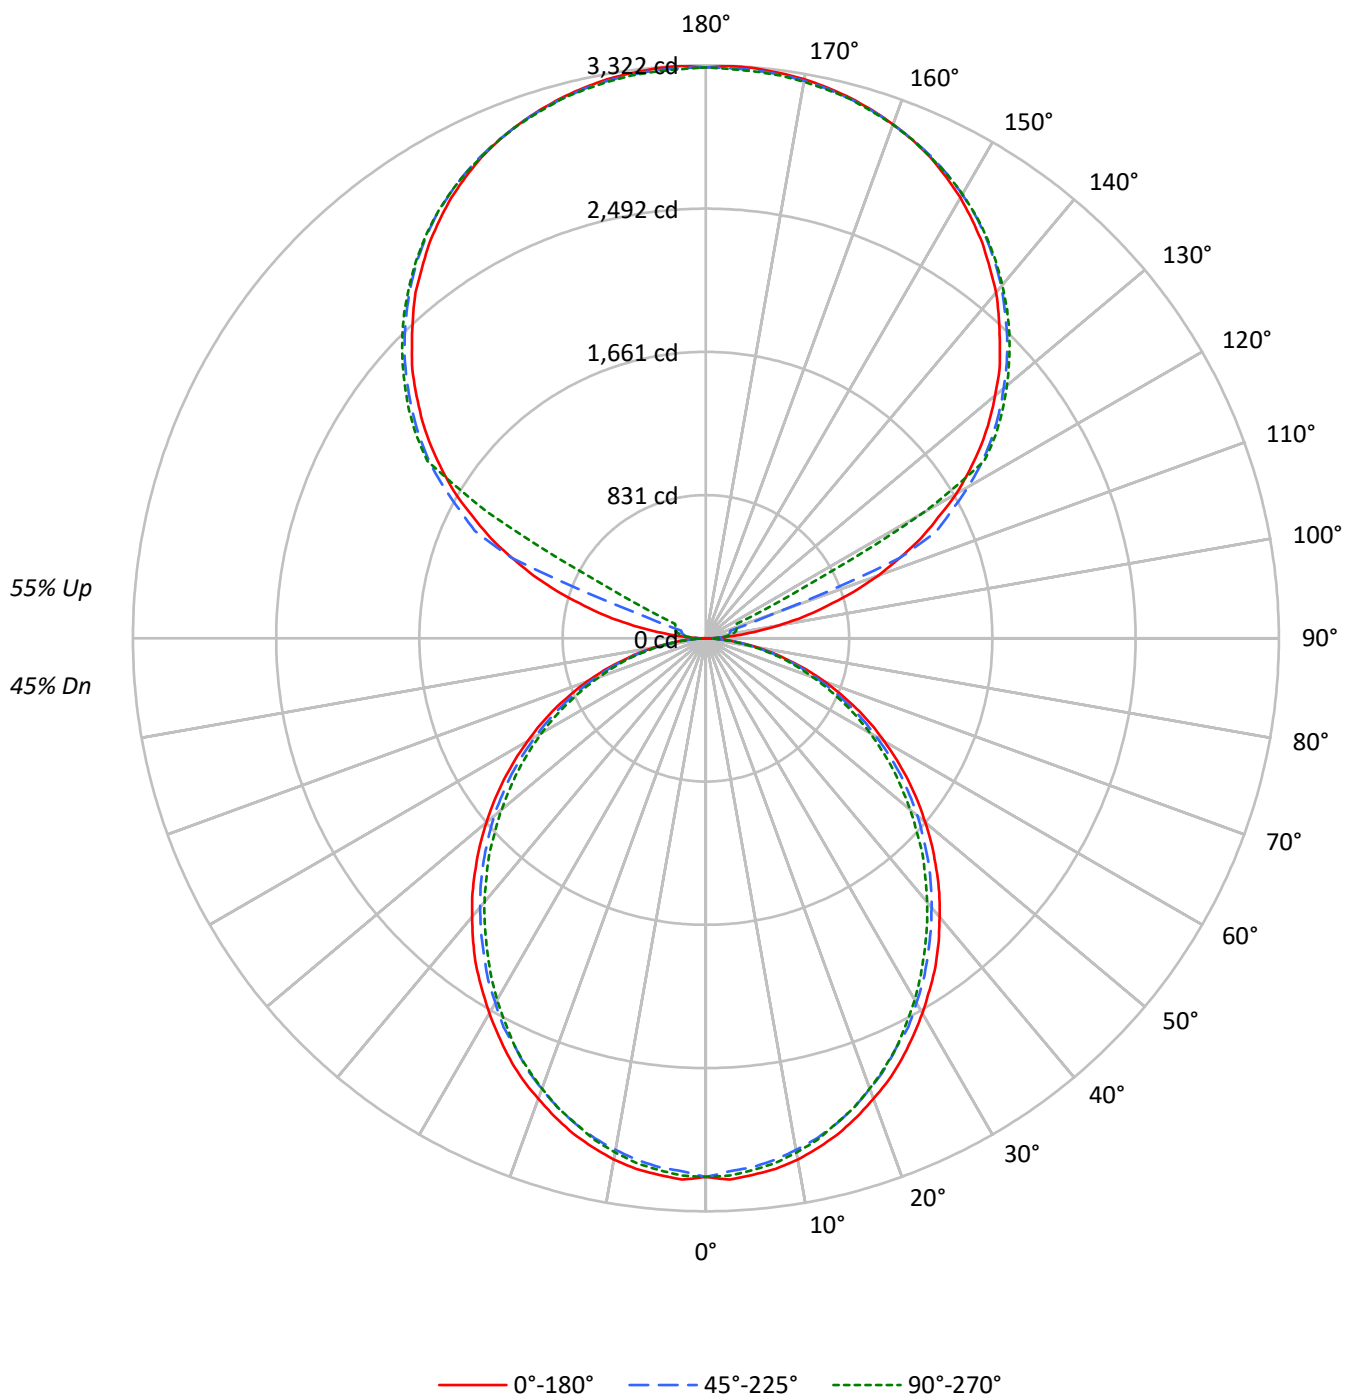

TEST NUMBER: P922449

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	65	65	65	52	52	52
1	97	92	89	85	88	85	82	79	71	68	66	58	56	54	46	45	44
2	88	81	75	69	80	74	69	64	62	58	55	51	48	45	40	38	37
3	80	71	64	58	73	65	59	54	55	50	46	45	41	38	36	33	31
4	73	63	55	49	67	58	51	46	48	43	39	40	36	33	32	29	27
5	67	56	48	42	61	52	44	39	43	38	34	36	32	29	29	26	23
6	62	50	42	36	57	46	39	34	39	34	29	32	28	25	26	23	21
7	57	45	37	32	52	42	35	30	35	30	26	29	25	22	24	21	18
8	53	41	33	28	49	38	31	26	32	27	23	27	23	20	22	19	16
9	50	37	30	25	45	35	28	23	30	24	21	25	21	18	20	17	15
10	46	34	27	22	42	32	25	21	27	22	18	23	19	16	19	16	13

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2279	2279	2279
5°	2283	2248	2263
10°	2265	2218	2233
15°	2231	2182	2186
20°	2186	2131	2137
25°	2142	2071	2081
30°	2085	2015	2009
35°	2032	1949	1933
40°	1967	1882	1861
45°	1902	1815	1787
50°	1830	1744	1702
55°	1756	1663	1624
60°	1671	1566	1534
65°	1579	1466	1428
70°	1462	1344	1314
75°	1299	1198	1209
80°	1104	1012	1009
85°	798	691	674

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1902 cd/sqm

TEST NUMBER: P922449

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	293.9	1.7
10°-20°	827.0	4.7
20°-30°	1215.3	6.9
30°-40°	1411.5	8.0
40°-50°	1409.7	8.0
50°-60°	1229.3	7.0
60°-70°	908.7	5.1
70°-80°	514.1	2.9
80°-90°	141.5	0.8
90°-100°	109.2	0.6
100°-110°	406.9	2.3
110°-120°	1079.2	6.1
120°-130°	1789.9	10.1
130°-140°	1901.3	10.8
140°-150°	1767.1	10.0
150°-160°	1420.7	8.0
160°-170°	915.4	5.2
170°-180°	315.1	1.8
0°-30°	2336.2	13.2
0°-40°	3747.7	21.2
0°-60°	6386.7	36.2
0°-90°	7951.0	45.0
90°-120°	1595.3	9.0
90°-150°	7053.7	40.0
90°-180°	9705.0	55.0
0°-180°	17655.9	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3123	3123	3123	3123	3123	
5°	3123	3111	3078	3102	3096	296
15°	2973	2955	2916	2928	2913	837
25°	2690	2666	2616	2621	2616	1238
35°	2321	2291	2243	2225	2210	1449
45°	1889	1868	1823	1790	1778	1458
55°	1430	1411	1375	1339	1324	1278
65°	964	946	916	889	874	953
75°	504	499	483	466	472	538
85°	123	120	117	108	105	137
90°	2	29	48	60	65	16
95°	156	76	93	106	103	184
105°	728	800	146	172	182	778
115°	1377	1418	1478	369	196	1356
125°	1947	1979	2024	2041	2048	1737
135°	2410	2448	2470	2494	2489	1862
145°	2796	2793	2834	2850	2838	1748
155°	3078	3057	3085	3100	3080	1418
165°	3243	3229	3236	3253	3236	916
175°	3317	3301	3306	3322	3298	316
180°	3310	3310	3310	3310	3310	

TEST NUMBER: P922449

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3122.7	3122.7	3122.7	3122.7	3122.7
2.5°	3140.9	3125.9	3092.8	3122.7	3117.0
5°	3122.7	3110.9	3077.8	3101.7	3095.9
7.5°	3101.7	3083.9	3050.7	3075.0	3068.9
10°	3068.9	3047.9	3011.8	3035.7	3026.8
12.5°	3023.6	3005.8	2969.8	2984.7	2978.8
15°	2972.7	2954.9	2915.6	2927.8	2912.8
17.5°	2909.6	2891.7	2852.6	2867.6	2852.6
20°	2840.5	2822.6	2780.5	2789.4	2777.7
22.5°	2771.6	2744.6	2705.4	2705.4	2699.3
25°	2690.4	2666.5	2615.6	2621.3	2615.6
27.5°	2600.2	2579.2	2540.4	2531.5	2516.5
30°	2510.4	2486.2	2441.2	2432.3	2420.3
32.5°	2414.2	2396.4	2348.2	2330.1	2318.0
35°	2321.2	2291.2	2243.1	2225.0	2210.0
37.5°	2216.1	2189.0	2140.8	2119.9	2104.9
40°	2108.0	2083.8	2035.7	2008.9	1996.9
42.5°	2002.9	1978.7	1930.9	1900.7	1882.8
45°	1888.8	1867.9	1822.6	1789.8	1777.7
47.5°	1777.7	1756.7	1708.5	1675.4	1657.6
50°	1660.5	1645.5	1603.4	1561.4	1546.4
52.5°	1546.4	1525.4	1486.5	1453.4	1432.4
55°	1429.5	1411.3	1375.3	1339.3	1324.4
57.5°	1312.2	1297.3	1258.1	1222.1	1210.0
60°	1195.0	1183.2	1141.1	1108.0	1099.1
62.5°	1080.9	1059.9	1029.9	1000.1	987.9
65°	964.0	945.8	915.9	888.9	873.9
67.5°	843.9	828.7	801.8	780.9	768.7
70°	732.7	720.6	693.6	672.5	660.8
72.5°	618.7	606.5	591.6	570.6	561.7
75°	504.4	498.6	483.3	465.5	471.5
77.5°	402.3	390.3	384.2	375.3	366.4
80°	300.4	297.2	291.1	282.2	276.3
82.5°	204.2	204.2	201.3	189.2	189.2
85°	123.0	120.1	117.3	108.0	105.1
87.5°	54.1	48.1	42.1	33.2	30.0
90°	2.3	28.7	47.8	60.0	64.6
92.5°	60.0	50.4	57.4	62.3	64.6
95°	155.6	76.5	93.3	105.5	103.0
97.5°	280.2	83.9	122.0	129.4	131.7
100°	424.1	95.9	136.5	155.6	160.4
102.5°	581.9	577.4	141.3	167.6	175.0
105°	728.2	800.1	146.2	172.4	182.1
107.5°	898.3	958.0	151.1	177.2	186.9
110°	1061.2	1111.3	419.3	179.8	189.1

TEST NUMBER: P922449

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1214.6	1257.5	1216.8	184.3	191.7
115°	1377.2	1417.9	1478.0	368.9	196.5
117.5°	1518.7	1566.5	1607.4	1264.6	637.1
120°	1676.8	1712.6	1755.9	1784.6	1461.2
122.5°	1810.8	1849.1	1897.2	1911.5	1914.1
125°	1947.3	1978.6	2024.1	2040.9	2048.0
127.5°	2071.9	2105.4	2141.5	2165.4	2167.7
130°	2189.3	2227.8	2253.9	2280.4	2278.1
132.5°	2309.1	2340.4	2366.6	2388.2	2385.9
135°	2409.8	2448.2	2469.5	2493.8	2488.9
137.5°	2515.1	2543.8	2567.9	2591.8	2584.7
140°	2618.1	2637.3	2663.5	2685.1	2673.2
142.5°	2704.5	2721.2	2752.3	2771.3	2759.4
145°	2795.5	2792.9	2833.6	2850.4	2838.5
147.5°	2874.3	2867.2	2907.9	2919.8	2910.5
150°	2951.1	2934.4	2972.7	2987.0	2975.0
152.5°	3015.7	2996.6	3032.4	3047.0	3030.2
155°	3078.0	3056.6	3085.3	3099.6	3080.5
157.5°	3128.3	3109.2	3130.9	3147.6	3128.3
160°	3171.5	3157.0	3171.5	3185.7	3169.0
162.5°	3209.6	3195.4	3207.4	3224.2	3202.6
165°	3243.2	3229.0	3236.1	3252.9	3236.1
167.5°	3269.6	3255.2	3262.6	3279.4	3257.8
170°	3291.3	3276.8	3281.6	3298.4	3276.8
172.5°	3305.5	3291.3	3296.1	3312.9	3291.3
175°	3317.4	3300.7	3305.5	3322.3	3298.4
177.5°	3322.3	3305.5	3308.1	3324.8	3303.3
180°	3310.4	3310.4	3310.4	3310.4	3310.4

TEST NUMBER: P922449

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.66	10.48	10.66	11.49	12.83	9.22	10.04	10.22	11.05	12.39
	3H	11.32	12.06	12.33	13.08	14.44	10.84	11.57	11.85	12.59	13.95
	4H	11.91	12.61	12.93	13.63	15.00	11.42	12.12	12.45	13.14	14.51
	6H	12.31	12.95	13.34	13.98	15.36	11.82	12.46	12.85	13.49	14.87
	8H	12.42	13.03	13.45	14.07	15.45	11.92	12.53	12.96	13.58	14.95
	12H	12.46	13.04	13.51	14.08	15.48	11.96	12.54	13.01	13.58	14.98
4H	2H	10.12	10.82	11.15	11.84	13.21	9.77	10.46	10.80	11.49	12.85
	3H	11.99	12.57	13.02	13.62	15.00	11.58	12.16	12.62	13.21	14.60
	4H	12.70	13.23	13.74	14.27	15.68	12.28	12.81	13.33	13.86	15.26
	6H	13.22	13.67	14.27	14.74	16.14	12.79	13.25	13.85	14.31	15.71
	8H	13.37	13.79	14.42	14.85	16.27	12.94	13.36	13.99	14.42	15.84
	12H	13.44	13.82	14.51	14.90	16.32	13.00	13.38	14.07	14.46	15.88
8H	4H	12.89	13.32	13.95	14.38	15.79	12.52	12.95	13.58	14.01	15.42
	6H	13.53	13.88	14.60	14.98	16.39	13.15	13.50	14.23	14.60	16.02
	8H	13.75	14.06	14.83	15.14	16.57	13.36	13.67	14.45	14.76	16.19
	12H	13.88	14.15	14.97	15.23	16.70	13.48	13.75	14.57	14.83	16.30
12H	4H	12.88	13.26	13.95	14.34	15.76	12.52	12.90	13.59	13.97	15.39
	6H	13.56	13.87	14.64	14.95	16.38	13.19	13.50	14.28	14.58	16.02
	8H	13.80	14.07	14.89	15.15	16.62	13.43	13.70	14.52	14.78	16.25