

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922451

Luminaire Tested: DFN2DIP-PN4F0-090D110US940-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922451
REPORT IS A COMBINATION OF REPORTS P901266 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-090D110US940-RLLONL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16532.3 lumens
Efficiency: N/A
Efficacy: 91.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 180
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922451

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-RLLONL

Luminous Intensity Polar Plot

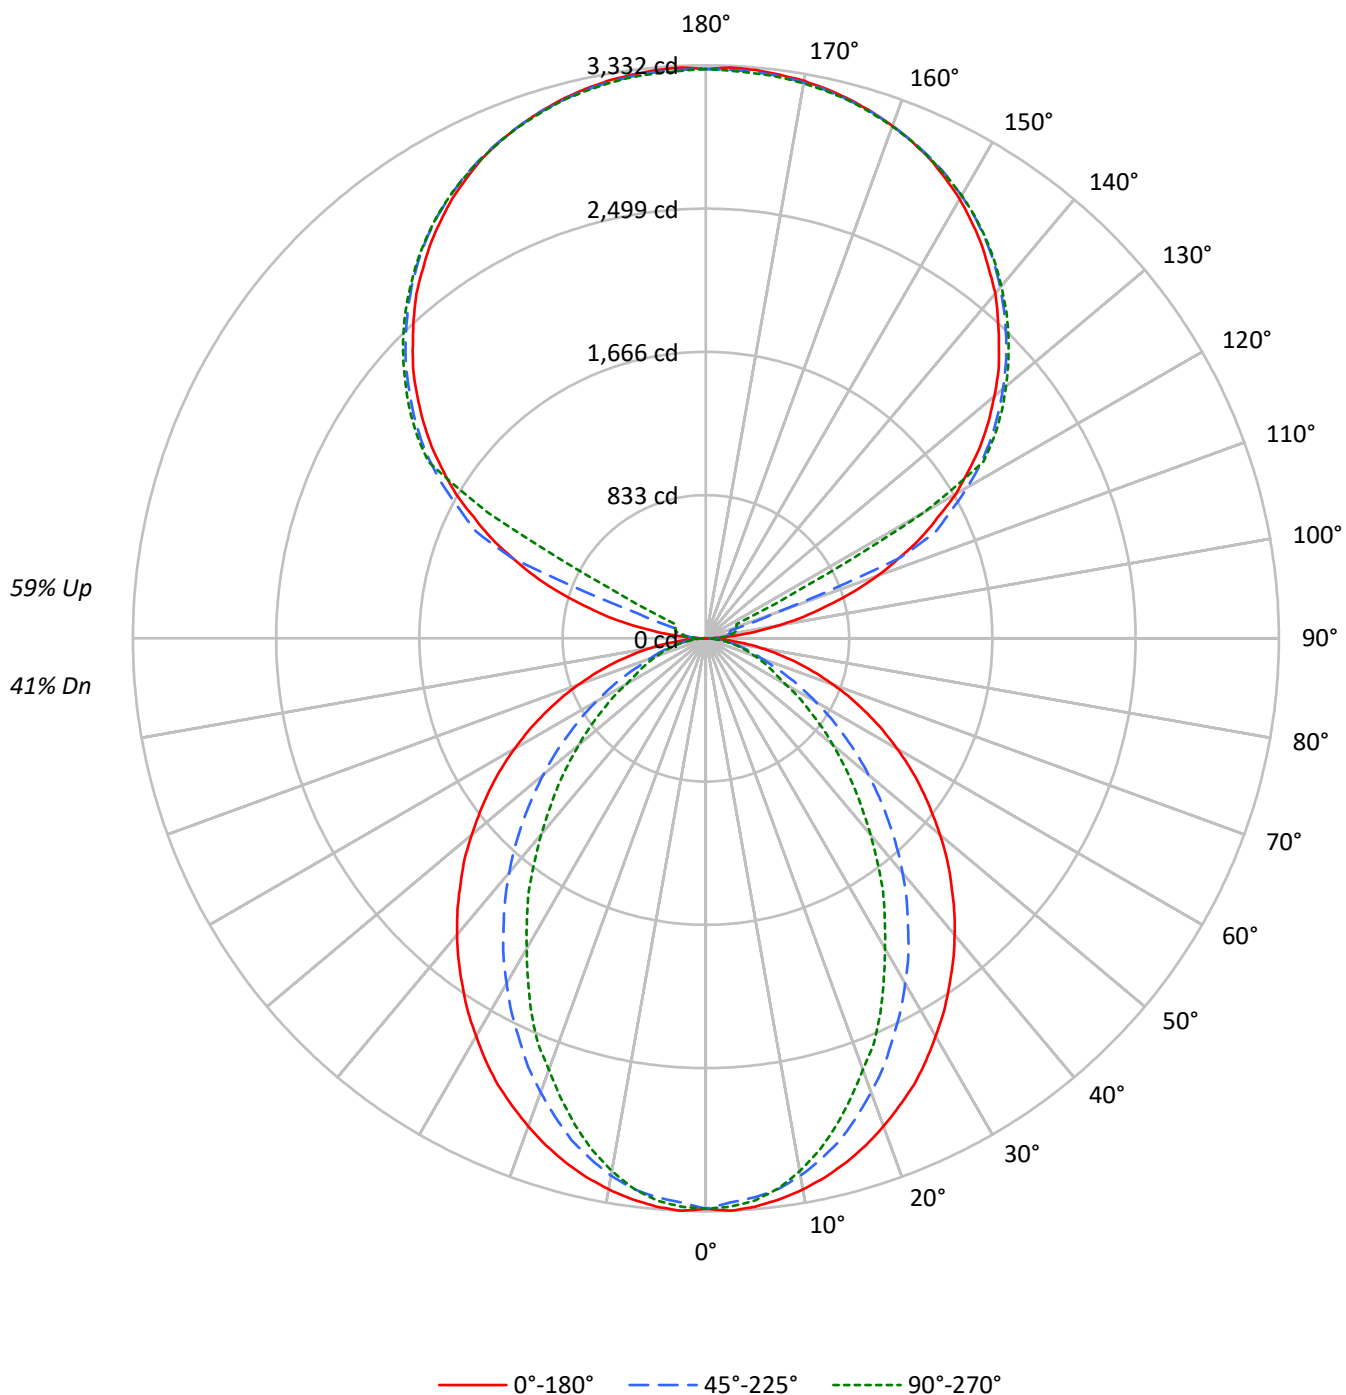

TEST NUMBER: P922451

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	78	78	78	63	63	63	48	48	48
1	96	92	88	85	88	84	81	78	69	67	65	56	54	53	43	42	41
2	88	81	75	70	80	74	69	65	61	58	55	49	47	45	38	37	35
3	80	71	64	59	73	65	59	55	54	50	46	44	41	38	34	32	31
4	74	63	56	50	67	58	52	47	48	44	40	39	36	33	31	29	27
5	68	57	49	43	62	52	45	40	44	38	35	36	32	29	28	26	24
6	63	51	43	38	57	47	40	35	39	34	30	32	28	26	26	23	21
7	58	46	38	33	53	42	36	31	36	31	27	29	26	23	24	21	19
8	54	42	34	29	49	39	32	27	33	28	24	27	23	20	22	19	17
9	50	38	31	26	46	35	29	25	30	25	21	25	21	18	20	17	15
10	47	35	28	23	43	33	26	22	28	23	19	23	19	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2421	2421	2421
5°	2425	2383	2398
10°	2401	2337	2321
15°	2368	2260	2201
20°	2324	2154	2053
25°	2279	2035	1910
30°	2219	1912	1729
35°	2160	1781	1570
40°	2100	1645	1388
45°	2031	1494	1222
50°	1959	1342	1061
55°	1884	1179	905
60°	1797	1009	746
65°	1696	836	672
70°	1575	675	608
75°	1423	595	554
80°	1202	500	483
85°	837	336	366

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2031 cd/sqm

TEST NUMBER: P922451

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	310.9	1.9
10°-20°	853.4	5.2
20°-30°	1198.1	7.2
30°-40°	1306.0	7.9
40°-50°	1200.4	7.3
50°-60°	942.7	5.7
60°-70°	613.6	3.7
70°-80°	315.9	1.9
80°-90°	86.5	0.5
90°-100°	109.2	0.7
100°-110°	406.9	2.5
110°-120°	1079.2	6.5
120°-130°	1789.9	10.8
130°-140°	1901.3	11.5
140°-150°	1767.1	10.7
150°-160°	1420.7	8.6
160°-170°	915.4	5.5
170°-180°	315.1	1.9
0°-30°	2362.4	14.3
0°-40°	3668.4	22.2
0°-60°	5811.5	35.2
0°-90°	6827.4	41.3
90°-120°	1595.3	9.6
90°-150°	7053.7	42.7
90°-180°	9705.0	58.7
0°-180°	16532.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3317	3317	3317	3317	3317	
5°	3317	3302	3263	3290	3281	315
15°	3155	3122	3020	2963	2933	889
25°	2864	2768	2570	2446	2401	1317
35°	2468	2314	2050	1861	1795	1544
45°	2017	1816	1501	1288	1216	1558
55°	1534	1300	975	796	738	1371
65°	1036	792	522	420	411	1027
75°	552	342	240	219	216	584
85°	129	66	57	57	57	148
90°	2	29	48	60	65	15
95°	156	76	93	106	103	184
105°	728	800	146	172	182	778
115°	1377	1418	1478	369	196	1356
125°	1947	1979	2024	2041	2048	1737
135°	2410	2448	2470	2494	2489	1862
145°	2796	2793	2834	2850	2838	1748
155°	3078	3057	3085	3100	3080	1418
165°	3243	3229	3236	3253	3236	916
175°	3317	3301	3306	3322	3298	316
180°	3310	3310	3310	3310	3310	



TEST NUMBER: P922451

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3316.9	3316.9	3316.9	3316.9	3316.9
2.5°	3331.9	3316.9	3283.7	3314.0	3308.0
5°	3316.9	3301.9	3262.8	3289.8	3280.9
7.5°	3289.8	3272.0	3230.0	3241.7	3226.7
10°	3253.9	3232.8	3173.0	3163.7	3145.9
12.5°	3208.9	3181.9	3100.7	3082.8	3049.6
15°	3154.8	3121.7	3019.8	2962.7	2932.8
17.5°	3091.7	3043.7	2917.5	2851.6	2803.5
20°	3019.8	2959.6	2809.5	2734.7	2668.4
22.5°	2941.8	2872.6	2698.4	2596.5	2551.6
25°	2863.7	2767.5	2569.5	2446.5	2401.3
27.5°	2770.7	2668.4	2449.4	2308.3	2239.2
30°	2671.7	2557.3	2317.2	2164.4	2083.1
32.5°	2575.4	2437.2	2191.4	2011.2	1936.0
35°	2467.5	2314.3	2050.3	1861.2	1794.9
37.5°	2362.4	2197.2	1918.2	1710.8	1636.0
40°	2251.3	2071.4	1779.9	1566.9	1488.9
42.5°	2137.3	1945.3	1642.0	1419.8	1344.9
45°	2017.2	1816.0	1500.9	1287.5	1215.6
47.5°	1903.2	1690.1	1365.9	1152.5	1086.6
50°	1777.1	1564.0	1233.8	1026.4	963.7
52.5°	1653.9	1428.7	1107.7	909.5	852.6
55°	1533.7	1299.7	975.4	795.6	738.5
57.5°	1410.9	1170.7	858.6	690.5	642.4
60°	1284.7	1044.5	735.4	582.5	534.4
62.5°	1161.8	921.7	630.3	486.3	462.4
65°	1035.6	792.4	522.3	420.4	411.2
67.5°	915.6	672.3	420.4	369.1	360.2
70°	789.5	555.4	348.1	318.2	306.0
72.5°	669.4	447.1	291.1	267.2	261.2
75°	552.2	342.1	240.1	219.1	216.2
77.5°	435.3	243.0	189.1	177.1	171.0
80°	327.1	174.2	143.9	132.2	132.2
82.5°	228.0	117.2	99.1	93.0	93.0
85°	128.9	65.9	57.0	57.0	57.0
87.5°	48.1	23.9	23.9	21.0	21.0
90°	2.3	28.7	47.8	60.0	64.6
92.5°	60.0	50.4	57.4	62.3	64.6
95°	155.6	76.5	93.3	105.5	103.0
97.5°	280.2	83.9	122.0	129.4	131.7
100°	424.1	95.9	136.5	155.6	160.4
102.5°	581.9	577.4	141.3	167.6	175.0
105°	728.2	800.1	146.2	172.4	182.1
107.5°	898.3	958.0	151.1	177.2	186.9
110°	1061.2	1111.3	419.3	179.8	189.1

TEST NUMBER: P922451

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1214.6	1257.5	1216.8	184.3	191.7
115°	1377.2	1417.9	1478.0	368.9	196.5
117.5°	1518.7	1566.5	1607.4	1264.6	637.1
120°	1676.8	1712.6	1755.9	1784.6	1461.2
122.5°	1810.8	1849.1	1897.2	1911.5	1914.1
125°	1947.3	1978.6	2024.1	2040.9	2048.0
127.5°	2071.9	2105.4	2141.5	2165.4	2167.7
130°	2189.3	2227.8	2253.9	2280.4	2278.1
132.5°	2309.1	2340.4	2366.6	2388.2	2385.9
135°	2409.8	2448.2	2469.5	2493.8	2488.9
137.5°	2515.1	2543.8	2567.9	2591.8	2584.7
140°	2618.1	2637.3	2663.5	2685.1	2673.2
142.5°	2704.5	2721.2	2752.3	2771.3	2759.4
145°	2795.5	2792.9	2833.6	2850.4	2838.5
147.5°	2874.3	2867.2	2907.9	2919.8	2910.5
150°	2951.1	2934.4	2972.7	2987.0	2975.0
152.5°	3015.7	2996.6	3032.4	3047.0	3030.2
155°	3078.0	3056.6	3085.3	3099.6	3080.5
157.5°	3128.3	3109.2	3130.9	3147.6	3128.3
160°	3171.5	3157.0	3171.5	3185.7	3169.0
162.5°	3209.6	3195.4	3207.4	3224.2	3202.6
165°	3243.2	3229.0	3236.1	3252.9	3236.1
167.5°	3269.6	3255.2	3262.6	3279.4	3257.8
170°	3291.3	3276.8	3281.6	3298.4	3276.8
172.5°	3305.5	3291.3	3296.1	3312.9	3291.3
175°	3317.4	3300.7	3305.5	3322.3	3298.4
177.5°	3322.3	3305.5	3308.1	3324.8	3303.3
180°	3310.4	3310.4	3310.4	3310.4	3310.4

TEST NUMBER: P922451

CATALOG NUMBER: DFN2DIP-PN4F0-090D110US940-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.36	10.12	10.39	11.16	12.55	5.32	6.09	6.36	7.12	8.52
	3H	11.03	11.71	12.08	12.76	14.17	6.51	7.19	7.55	8.23	9.65
	4H	11.64	12.29	12.70	13.33	14.75	6.95	7.60	8.01	8.65	10.07
	6H	12.06	12.65	13.13	13.71	15.14	7.27	7.87	8.34	8.92	10.35
	8H	12.19	12.75	13.26	13.82	15.25	7.36	7.93	8.43	8.99	10.42
	12H	12.25	12.78	13.32	13.85	15.29	7.40	7.94	8.48	9.00	10.45
4H	2H	9.37	10.01	10.43	11.06	12.48	5.91	6.56	6.97	7.61	9.02
	3H	11.19	11.73	12.26	12.81	14.24	7.26	7.79	8.33	8.87	10.30
	4H	11.88	12.38	12.96	13.44	14.90	7.80	8.29	8.88	9.36	10.81
	6H	12.40	12.82	13.48	13.91	15.36	8.22	8.64	9.30	9.73	11.18
	8H	12.57	12.97	13.66	14.05	15.51	8.35	8.74	9.43	9.82	11.29
	12H	12.67	13.02	13.77	14.12	15.59	8.41	8.77	9.51	9.86	11.33
8H	4H	11.85	12.24	12.93	13.32	14.79	8.08	8.47	9.16	9.55	11.02
	6H	12.41	12.74	13.52	13.86	15.32	8.60	8.92	9.70	10.05	11.51
	8H	12.63	12.92	13.75	14.02	15.50	8.79	9.07	9.90	10.18	11.66
	12H	12.77	13.02	13.89	14.12	15.64	8.90	9.15	10.02	10.26	11.78
12H	4H	11.80	12.15	12.90	13.25	14.72	8.08	8.44	9.18	9.53	11.00
	6H	12.39	12.67	13.50	13.78	15.26	8.65	8.93	9.76	10.04	11.52
	8H	12.61	12.86	13.73	13.96	15.48	8.85	9.10	9.97	10.21	11.73

END OF REPORT