

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922468

Luminaire Tested: DFN2DIP-PN4F0-100D070US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922468
REPORT IS A COMBINATION OF REPORTS P899675 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D070US940-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14352.1 lumens
Efficiency: N/A
Efficacy: 93.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 153.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922468

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US940-FLLFLL

Luminous Intensity Polar Plot

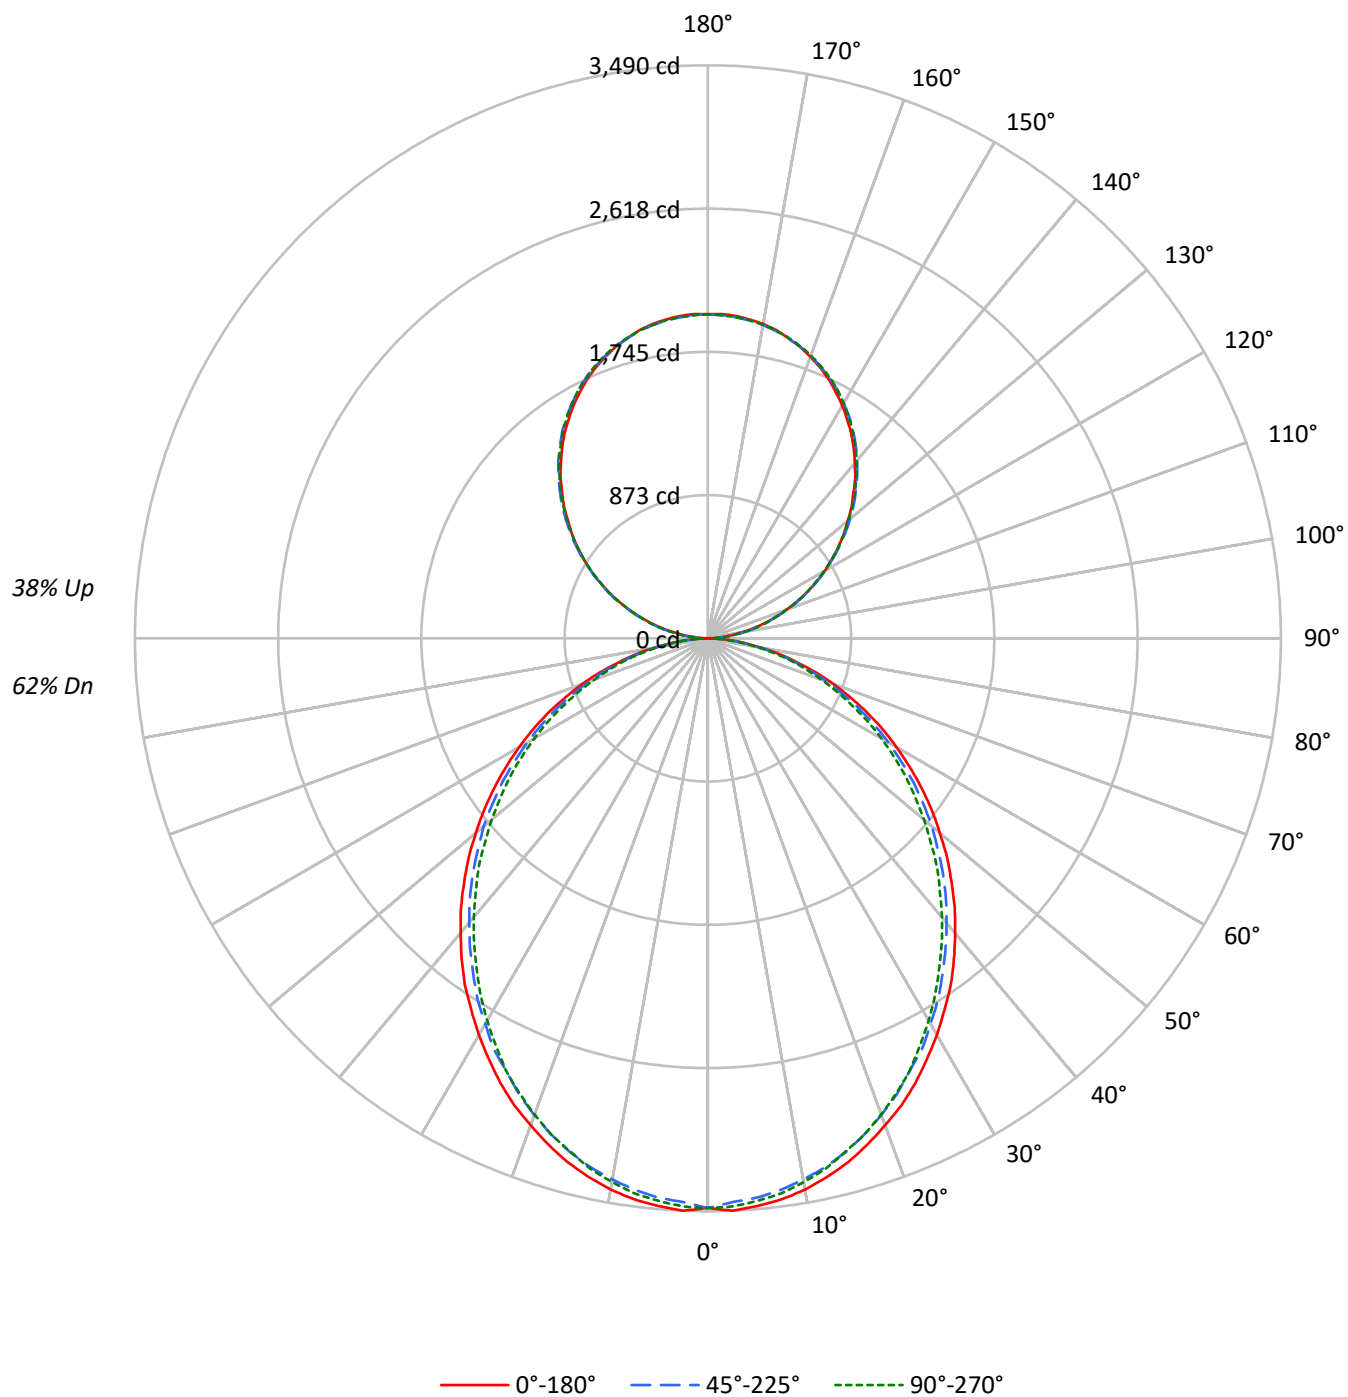

TEST NUMBER: P922468

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US940-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	90	90	90	78	78	78	67	67	67
1	100	96	92	88	94	90	87	83	79	76	74	68	67	65	59	58	56
2	91	84	78	72	85	79	73	68	69	65	61	60	57	54	52	50	48
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	38	35
5	70	58	50	44	65	55	47	42	49	43	38	43	38	34	37	33	30
6	65	52	44	38	60	49	42	36	44	38	33	39	34	30	34	30	27
7	60	47	39	34	56	45	37	32	40	34	29	35	30	27	31	27	24
8	56	43	35	30	52	41	34	29	36	30	26	32	27	24	28	24	21
9	52	39	32	27	49	37	30	26	33	28	23	30	25	21	26	22	19
10	49	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2533	2533	2533
5°	2537	2498	2515
10°	2516	2464	2481
15°	2479	2424	2428
20°	2429	2368	2374
25°	2380	2301	2312
30°	2317	2239	2232
35°	2258	2165	2148
40°	2185	2091	2068
45°	2113	2016	1986
50°	2034	1938	1891
55°	1951	1848	1804
60°	1857	1740	1704
65°	1754	1629	1586
70°	1624	1493	1460
75°	1444	1331	1344
80°	1227	1125	1120
85°	887	768	749

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2113 cd/sqm

TEST NUMBER: P922468

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	326.6	2.3
10°-20°	918.8	6.4
20°-30°	1350.3	9.4
30°-40°	1568.3	10.9
40°-50°	1566.4	10.9
50°-60°	1365.8	9.5
60°-70°	1009.7	7.0
70°-80°	571.3	4.0
80°-90°	156.4	1.1
90°-100°	122.2	0.9
100°-110°	388.1	2.7
110°-120°	664.2	4.6
120°-130°	873.6	6.1
130°-140°	980.5	6.8
140°-150°	961.5	6.7
150°-160°	806.6	5.6
160°-170°	534.9	3.7
170°-180°	187.0	1.3
0°-30°	2595.7	18.1
0°-40°	4164.0	29.0
0°-60°	7096.2	49.4
0°-90°	8833.5	61.5
90°-120°	1174.5	8.2
90°-150°	3990.1	27.8
90°-180°	5519.0	38.5
0°-180°	14352.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3470	3470	3470	3470	3470	
5°	3470	3457	3420	3446	3440	329
15°	3303	3283	3240	3253	3236	930
25°	2989	2963	2906	2912	2906	1376
35°	2579	2546	2492	2472	2456	1611
45°	2099	2075	2025	1989	1975	1620
55°	1588	1568	1528	1488	1472	1420
65°	1071	1051	1018	988	971	1059
75°	560	554	537	517	524	598
85°	137	134	130	120	117	152
90°	2	21	58	55	56	14
95°	87	104	107	107	104	97
105°	358	363	367	370	370	378
115°	667	676	673	671	667	659
125°	970	984	980	974	972	866
135°	1254	1272	1276	1274	1269	969
145°	1522	1534	1544	1546	1539	951
155°	1741	1746	1751	1759	1754	801
165°	1894	1892	1892	1904	1896	534
175°	1970	1966	1962	1974	1964	187
180°	1974	1974	1974	1974	1974	

TEST NUMBER: P922468

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3469.7	3469.7	3469.7	3469.7	3469.7
2.5°	3489.9	3473.2	3436.4	3469.7	3463.3
5°	3469.7	3456.6	3419.8	3446.4	3440.0
7.5°	3446.4	3426.5	3389.7	3416.6	3409.9
10°	3409.9	3386.5	3346.5	3373.1	3363.2
12.5°	3359.6	3339.8	3299.8	3316.4	3309.7
15°	3303.0	3283.2	3239.6	3253.0	3236.5
17.5°	3232.9	3213.1	3169.5	3186.2	3169.5
20°	3156.0	3136.2	3089.5	3099.4	3086.3
22.5°	3079.6	3049.6	3006.0	3006.0	2999.3
25°	2989.4	2962.8	2906.2	2912.5	2906.2
27.5°	2889.1	2865.8	2822.6	2812.7	2796.0
30°	2789.4	2762.4	2712.5	2702.6	2689.1
32.5°	2682.4	2662.6	2609.1	2589.0	2575.5
35°	2579.1	2545.8	2492.3	2472.2	2455.5
37.5°	2462.3	2432.1	2378.7	2355.4	2338.7
40°	2342.3	2315.3	2261.9	2232.2	2218.8
42.5°	2225.4	2198.5	2145.5	2111.8	2092.0
45°	2098.7	2075.4	2025.1	1988.6	1975.2
47.5°	1975.2	1951.9	1898.4	1861.5	1841.7
50°	1844.9	1828.3	1781.5	1734.8	1718.2
52.5°	1718.2	1694.9	1651.6	1614.9	1591.5
55°	1588.3	1568.2	1528.1	1488.1	1471.5
57.5°	1458.0	1441.4	1397.8	1357.9	1344.4
60°	1327.8	1314.6	1267.9	1231.1	1221.2
62.5°	1201.0	1177.7	1144.4	1111.2	1097.7
65°	1071.1	1051.0	1017.7	987.6	971.0
67.5°	937.7	920.7	891.0	867.6	854.2
70°	814.1	800.7	770.6	747.3	734.1
72.5°	687.4	674.0	657.4	634.0	624.0
75°	560.4	554.0	537.0	517.2	523.9
77.5°	447.1	433.6	426.9	417.0	407.1
80°	333.8	330.3	323.5	313.6	306.9
82.5°	226.9	226.9	223.7	210.3	210.3
85°	136.6	133.5	130.3	120.0	116.8
87.5°	60.2	53.4	46.7	36.8	33.3
90°	1.8	21.4	58.3	54.8	56.5
92.5°	36.9	50.0	51.8	53.6	53.6
95°	86.9	103.5	106.6	106.6	103.5
97.5°	144.6	160.1	166.7	166.7	166.7
100°	211.2	225.0	229.7	229.7	227.9
102.5°	281.5	291.6	298.2	300.0	298.2
105°	358.3	363.0	366.6	369.6	369.6
107.5°	434.4	441.6	441.6	442.8	434.4
110°	508.3	517.8	517.8	517.8	513.0

TEST NUMBER: P922468

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	588.0	598.2	596.4	591.6	588.0
115°	666.6	676.1	673.2	671.4	666.6
117.5°	744.5	757.6	749.3	744.5	739.8
120°	823.0	836.2	823.0	823.0	817.7
122.5°	894.5	911.1	902.9	898.0	894.5
125°	969.5	984.4	979.6	974.3	972.5
127.5°	1042.7	1061.1	1054.6	1047.5	1042.7
130°	1111.2	1132.6	1129.6	1126.1	1119.5
132.5°	1187.9	1204.6	1205.8	1197.5	1192.7
135°	1254.0	1272.4	1276.0	1274.2	1269.4
137.5°	1327.8	1342.6	1345.6	1344.4	1337.3
140°	1392.7	1407.6	1415.9	1415.9	1409.3
142.5°	1459.3	1474.2	1478.9	1480.7	1474.2
145°	1522.4	1534.3	1543.8	1545.6	1539.1
147.5°	1579.0	1593.8	1601.0	1603.9	1597.4
150°	1637.3	1647.3	1653.9	1659.3	1653.9
152.5°	1689.0	1699.2	1707.4	1714.0	1707.4
155°	1740.8	1745.5	1751.0	1759.3	1753.9
157.5°	1785.5	1789.0	1792.0	1803.9	1795.5
160°	1825.3	1828.9	1830.7	1840.8	1833.6
162.5°	1862.2	1862.2	1864.0	1875.3	1867.0
165°	1893.7	1891.9	1891.9	1903.9	1895.5
167.5°	1922.3	1917.0	1917.0	1928.9	1920.6
170°	1943.8	1939.0	1937.2	1949.1	1939.0
172.5°	1958.6	1953.8	1952.0	1964.0	1953.8
175°	1970.5	1965.8	1962.2	1974.1	1964.0
177.5°	1977.1	1972.3	1968.7	1978.9	1968.7
180°	1974.1	1974.1	1974.1	1974.1	1974.1

TEST NUMBER: P922468

CATALOG NUMBER: DFN2DIP-PN4F0-100D070US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.51	12.48	12.36	13.36	14.45	11.07	12.04	11.92	12.92	14.01
	3H	13.18	14.06	14.04	14.94	16.06	12.70	13.57	13.56	14.45	15.58
	4H	13.78	14.60	14.65	15.49	16.62	13.29	14.12	14.17	15.01	16.14
	6H	14.18	14.95	15.08	15.84	16.99	13.69	14.45	14.58	15.35	16.50
	8H	14.29	15.02	15.19	15.93	17.08	13.80	14.53	14.70	15.44	16.59
	12H	14.35	15.04	15.25	15.95	17.12	13.85	14.54	14.75	15.45	16.62
4H	2H	11.98	12.81	12.87	13.70	14.83	11.63	12.46	12.52	13.35	14.48
	3H	13.86	14.55	14.76	15.48	16.62	13.46	14.15	14.36	15.07	16.22
	4H	14.58	15.22	15.49	16.13	17.31	14.17	14.80	15.07	15.71	16.89
	6H	15.11	15.65	16.03	16.59	17.77	14.68	15.23	15.61	16.17	17.35
	8H	15.26	15.77	16.19	16.71	17.90	14.83	15.34	15.76	16.28	17.47
	12H	15.34	15.80	16.29	16.75	17.95	14.90	15.36	15.85	16.31	17.51
8H	4H	14.79	15.30	15.71	16.23	17.42	14.42	14.93	15.34	15.86	17.05
	6H	15.43	15.85	16.38	16.83	18.02	15.05	15.48	16.00	16.45	17.64
	8H	15.65	16.03	16.61	16.99	18.20	15.27	15.64	16.23	16.61	17.81
	12H	15.79	16.12	16.76	17.08	18.34	15.39	15.72	16.35	16.68	17.93
12H	4H	14.78	15.24	15.73	16.19	17.39	14.42	14.88	15.36	15.83	17.03
	6H	15.46	15.83	16.42	16.80	18.01	15.10	15.47	16.06	16.44	17.64
	8H	15.71	16.04	16.67	17.00	18.25	15.34	15.67	16.30	16.63	17.88