

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925070

Luminaire Tested: DFN2DIP-PN4F0-060D110US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925070
REPORT IS A COMBINATION OF REPORTS P899740 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-060D110US950-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14152.6 lumens
Efficiency: N/A
Efficacy: 96.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 146.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925070

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US950-RLLFLL

Luminous Intensity Polar Plot

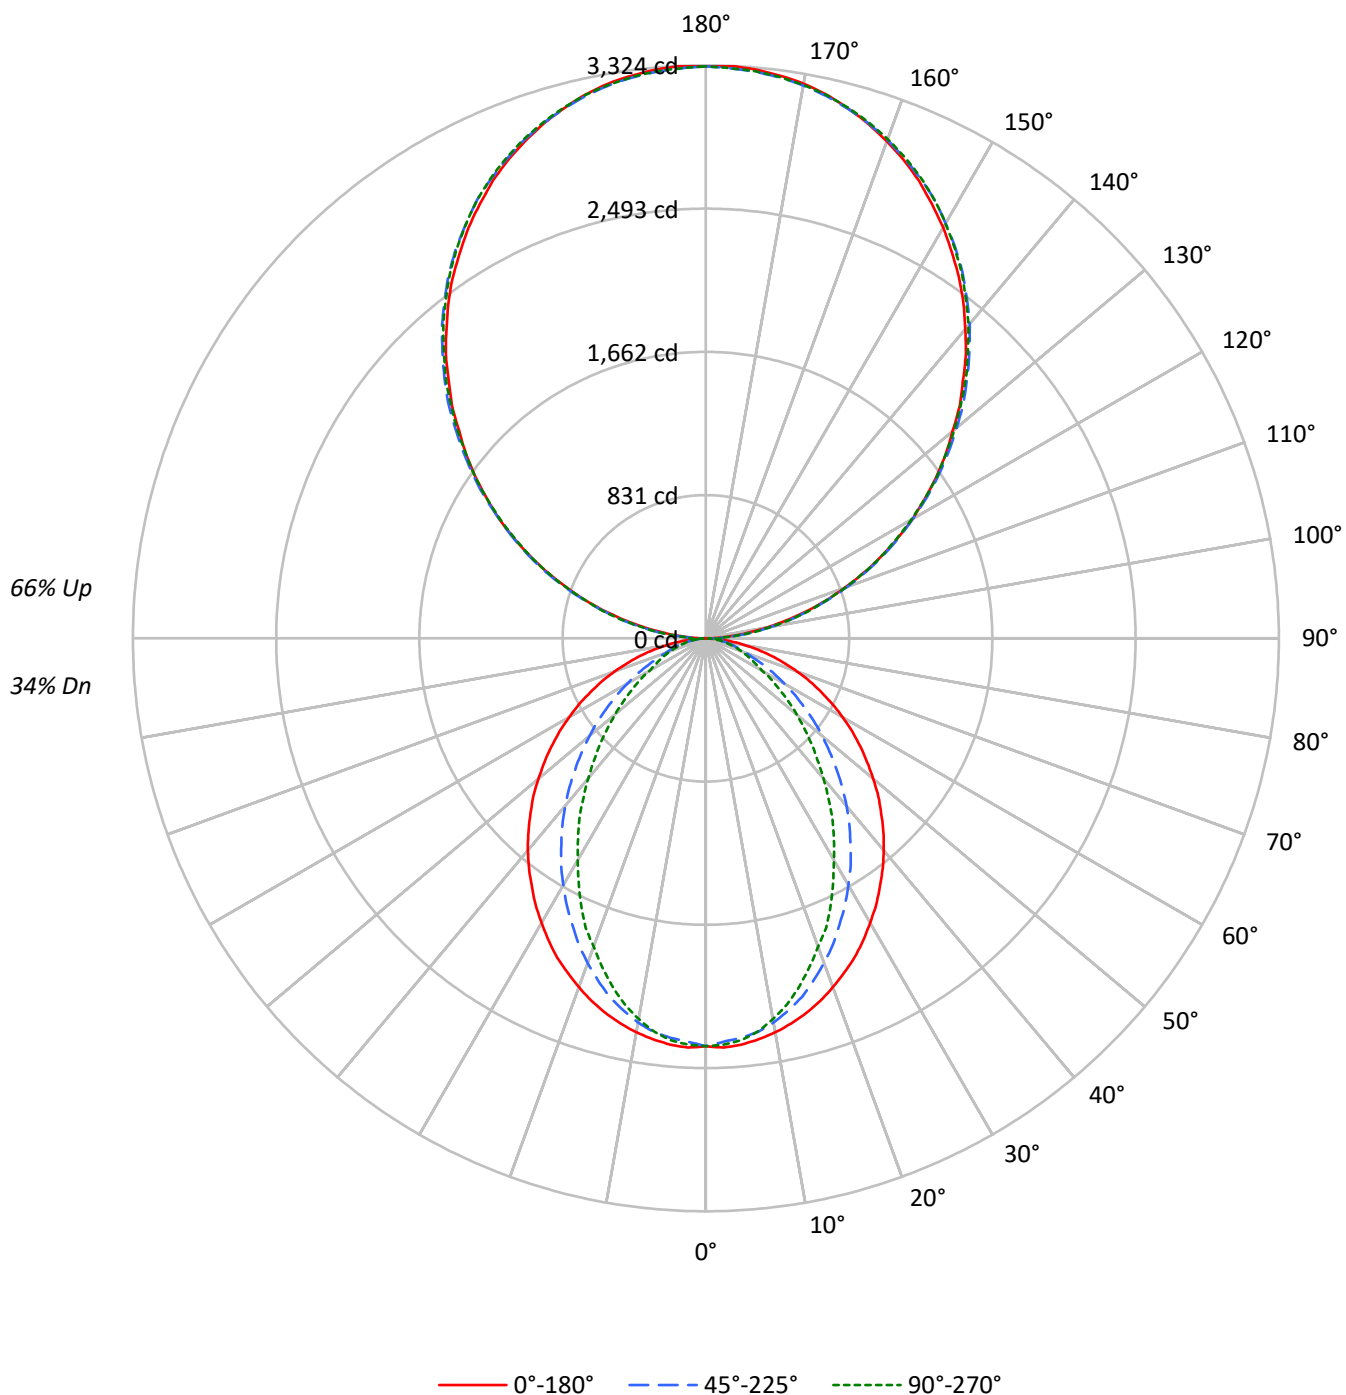

TEST NUMBER: P925070

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	75	75	75	58	58	58	42	42	42
1	95	91	87	84	85	82	79	76	66	64	62	51	50	48	37	37	36
2	86	79	74	69	78	72	67	63	58	55	52	45	43	41	33	32	31
3	79	70	63	58	71	64	58	53	51	47	44	40	37	35	30	28	27
4	72	62	55	49	65	56	50	45	46	41	38	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	21	20	18	16
8	53	41	33	28	47	37	31	26	31	26	22	25	21	18	19	16	15
9	49	37	30	25	44	34	28	23	28	23	20	23	19	17	17	15	13
10	46	34	27	23	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1727	1727	1727
5°	1730	1700	1711
10°	1712	1667	1655
15°	1689	1612	1569
20°	1658	1536	1464
25°	1626	1451	1362
30°	1583	1364	1233
35°	1541	1270	1120
40°	1498	1173	990
45°	1448	1066	872
50°	1397	957	757
55°	1344	841	646
60°	1281	720	532
65°	1210	596	479
70°	1123	481	434
75°	1015	424	396
80°	857	357	344
85°	597	239	261

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2597 cd/sqm

TEST NUMBER: P925070

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US950-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	221.7	1.6
10°-20°	608.7	4.3
20°-30°	854.5	6.0
30°-40°	931.5	6.6
40°-50°	856.2	6.0
50°-60°	672.4	4.8
60°-70°	437.7	3.1
70°-80°	225.3	1.6
80°-90°	66.9	0.5
90°-100°	205.4	1.5
100°-110°	652.5	4.6
110°-120°	1116.7	7.9
120°-130°	1468.6	10.4
130°-140°	1648.4	11.6
140°-150°	1616.5	11.4
150°-160°	1356.0	9.6
160°-170°	899.3	6.4
170°-180°	314.3	2.2
0°-30°	1684.9	11.9
0°-40°	2616.4	18.5
0°-60°	4144.9	29.3
0°-90°	4874.8	34.4
90°-120°	1974.6	14.0
90°-150°	6708.2	47.4
90°-180°	9278.0	65.6
0°-180°	14152.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2366	2366	2366	2366	2366	
5°	2366	2355	2327	2346	2340	224
15°	2250	2226	2154	2113	2092	634
25°	2042	1974	1833	1745	1713	939
35°	1760	1651	1462	1327	1280	1102
45°	1439	1295	1071	918	867	1111
55°	1094	927	696	567	527	978
65°	739	565	372	300	293	732
75°	394	244	171	156	154	417
85°	92	47	41	41	41	106
90°	3	36	98	92	95	14
95°	146	174	179	179	174	163
105°	602	610	616	621	621	636
115°	1121	1137	1132	1129	1121	1108
125°	1630	1655	1647	1638	1635	1457
135°	2108	2139	2145	2142	2134	1630
145°	2559	2579	2596	2598	2587	1599
155°	2927	2935	2944	2958	2949	1347
165°	3184	3181	3181	3201	3187	898
175°	3313	3305	3299	3319	3302	315
180°	3319	3319	3319	3319	3319	

TEST NUMBER: P925070

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2365.7	2365.7	2365.7	2365.7	2365.7
2.5°	2376.4	2365.7	2342.1	2363.6	2359.3
5°	2365.7	2355.0	2327.1	2346.5	2340.1
7.5°	2346.5	2333.7	2303.7	2312.1	2301.4
10°	2320.7	2305.7	2263.1	2256.5	2243.7
12.5°	2288.7	2269.4	2211.5	2198.8	2175.1
15°	2250.1	2226.4	2153.8	2113.1	2091.7
17.5°	2205.2	2170.8	2080.9	2033.8	1999.6
20°	2153.8	2110.8	2003.9	1950.5	1903.2
22.5°	2098.1	2048.8	1924.6	1851.9	1819.9
25°	2042.5	1973.9	1832.6	1745.0	1712.7
27.5°	1976.2	1903.2	1747.0	1646.3	1597.1
30°	1905.5	1824.0	1652.7	1543.7	1485.8
32.5°	1836.9	1738.4	1563.0	1434.4	1380.8
35°	1759.9	1650.7	1462.4	1327.4	1280.2
37.5°	1685.0	1567.0	1368.1	1220.3	1166.8
40°	1605.7	1477.4	1269.5	1117.5	1061.9
42.5°	1524.4	1387.4	1171.1	1012.6	959.2
45°	1438.7	1295.2	1070.6	918.3	867.0
47.5°	1357.4	1205.5	974.2	822.1	775.0
50°	1267.5	1115.5	880.0	732.1	687.4
52.5°	1179.5	1019.0	790.0	648.7	608.1
55°	1094.0	927.0	695.8	567.4	526.7
57.5°	1006.3	834.9	612.4	492.5	458.1
60°	916.3	745.1	524.5	415.5	381.1
62.5°	828.6	657.4	449.5	346.9	329.8
65°	738.7	565.1	372.5	299.8	293.3
67.5°	653.0	479.5	299.8	263.3	256.9
70°	563.1	396.1	248.2	227.0	218.3
72.5°	477.5	318.9	207.6	190.6	186.2
75°	393.9	243.9	171.2	156.3	154.3
77.5°	310.5	173.3	134.9	126.3	122.0
80°	233.3	124.2	102.7	94.3	94.3
82.5°	162.7	83.6	70.6	66.3	66.3
85°	92.0	47.0	40.6	40.6	40.6
87.5°	34.3	17.1	17.1	15.0	15.0
90°	3.0	36.1	98.1	92.1	95.0
92.5°	62.0	84.0	87.0	90.1	90.1
95°	146.1	174.1	179.1	179.1	174.1
97.5°	243.2	269.1	280.2	280.2	280.2
100°	355.2	378.2	386.2	386.2	383.2
102.5°	473.3	490.3	501.3	504.3	501.3
105°	602.4	610.4	616.4	621.3	621.3
107.5°	730.4	742.4	742.4	744.4	730.4
110°	854.5	870.5	870.5	870.5	862.5

TEST NUMBER: P925070

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	988.5	1005.5	1002.6	994.5	988.5
115°	1120.7	1136.6	1131.6	1128.7	1120.7
117.5°	1251.7	1273.7	1259.7	1251.7	1243.7
120°	1383.8	1405.8	1383.8	1383.8	1374.8
122.5°	1503.9	1531.8	1517.8	1509.8	1503.9
125°	1629.9	1654.9	1646.9	1637.9	1634.9
127.5°	1753.0	1784.0	1773.0	1761.0	1753.0
130°	1868.0	1904.1	1899.0	1893.0	1882.1
132.5°	1997.1	2025.2	2027.2	2013.1	2005.1
135°	2108.1	2139.2	2145.2	2142.2	2134.2
137.5°	2232.3	2257.3	2262.2	2260.2	2248.3
140°	2341.3	2366.3	2380.3	2380.3	2369.4
142.5°	2453.4	2478.4	2486.4	2489.4	2478.4
145°	2559.4	2579.4	2595.5	2598.4	2587.4
147.5°	2654.5	2679.5	2691.5	2696.5	2685.5
150°	2752.6	2769.6	2780.5	2789.6	2780.5
152.5°	2839.6	2856.6	2870.6	2881.7	2870.6
155°	2926.7	2934.6	2943.7	2957.7	2948.6
157.5°	3001.7	3007.7	3012.6	3032.7	3018.6
160°	3068.7	3074.7	3077.7	3094.8	3082.8
162.5°	3130.7	3130.7	3133.8	3152.8	3138.8
165°	3183.8	3180.7	3180.7	3200.8	3186.7
167.5°	3231.8	3222.8	3222.8	3242.8	3228.8
170°	3267.8	3259.8	3256.9	3276.8	3259.8
172.5°	3292.8	3284.8	3281.9	3301.9	3284.8
175°	3312.9	3304.8	3298.8	3318.9	3301.9
177.5°	3323.8	3315.8	3309.8	3326.9	3309.8
180°	3318.9	3318.9	3318.9	3318.9	3318.9

TEST NUMBER: P925070

CATALOG NUMBER: DFN2DIP-PN4F0-060D110US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.39	8.11	8.48	9.19	10.67	3.36	4.08	4.45	5.16	6.64
	3H	9.07	9.71	10.16	10.80	12.29	4.54	5.18	5.63	6.27	7.77
	4H	9.67	10.28	10.78	11.37	12.87	4.99	5.59	6.09	6.69	8.19
	6H	10.09	10.65	11.20	11.74	13.26	5.30	5.86	6.42	6.96	8.47
	8H	10.21	10.75	11.33	11.86	13.36	5.39	5.92	6.51	7.03	8.54
	12H	10.27	10.78	11.39	11.88	13.41	5.43	5.94	6.55	7.04	8.57
4H	2H	7.40	8.01	8.51	9.10	10.60	3.94	4.55	5.05	5.64	7.15
	3H	9.22	9.73	10.34	10.84	12.36	5.28	5.79	6.40	6.91	8.42
	4H	9.91	10.37	11.03	11.48	13.02	5.83	6.29	6.95	7.40	8.94
	6H	10.42	10.82	11.55	11.95	13.48	6.24	6.64	7.37	7.77	9.30
	8H	10.60	10.97	11.73	12.09	13.63	6.37	6.74	7.50	7.86	9.41
	12H	10.69	11.02	11.83	12.16	13.71	6.43	6.77	7.57	7.90	9.45
8H	4H	9.87	10.24	11.00	11.36	12.91	6.10	6.47	7.23	7.59	9.14
	6H	10.43	10.74	11.58	11.91	13.45	6.62	6.92	7.77	8.09	9.63
	8H	10.65	10.92	11.81	12.07	13.63	6.81	7.08	7.96	8.22	9.78
	12H	10.79	11.02	11.95	12.17	13.76	6.92	7.16	8.08	8.30	9.90
12H	4H	9.82	10.15	10.96	11.29	12.84	6.10	6.44	7.25	7.57	9.12
	6H	10.41	10.68	11.57	11.82	13.38	6.67	6.93	7.82	8.08	9.64
	8H	10.63	10.86	11.79	12.00	13.60	6.87	7.11	8.03	8.25	9.85