

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925094

Luminaire Tested: DFN2DIP-PN4F0-070D080US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925094
REPORT IS A COMBINATION OF REPORTS P899688 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-070D080US950-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12430.6 lumens
Efficiency: N/A
Efficacy: 99.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 124.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925094

CATALOG NUMBER: DFN2DIP-PN4F0-070D080US950-RLLFLL

Luminous Intensity Polar Plot

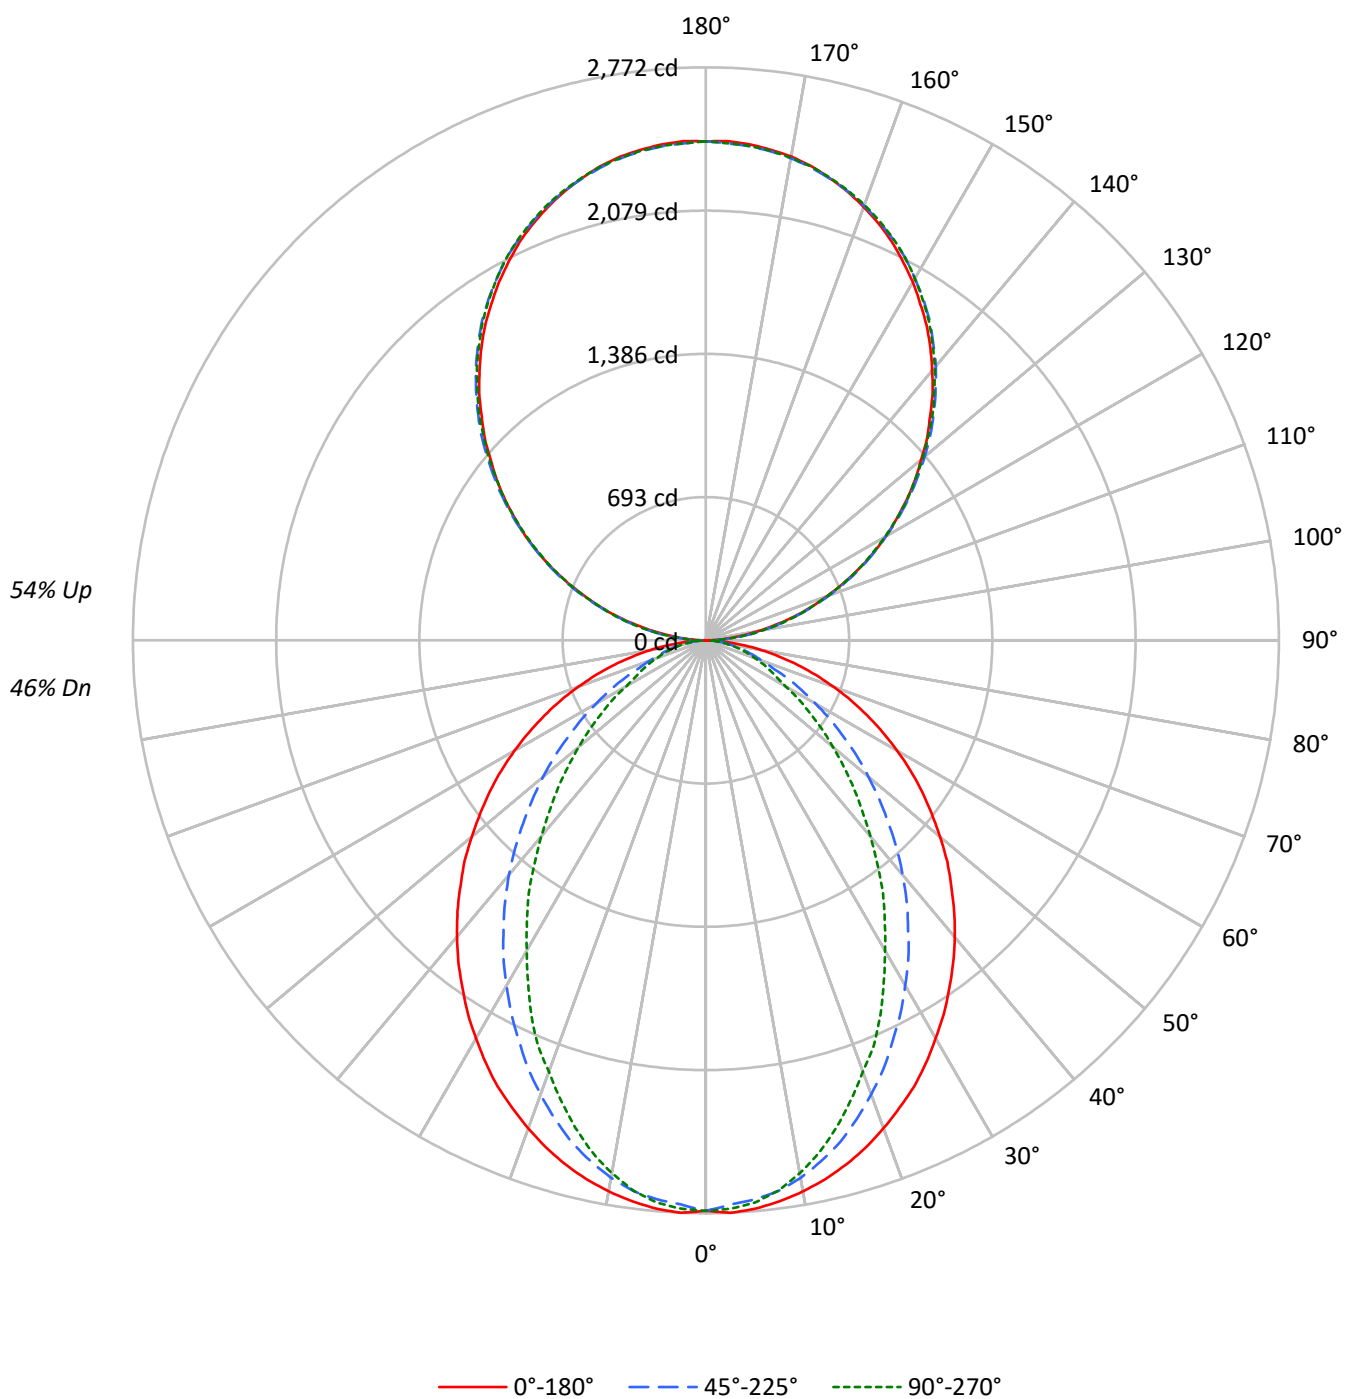

TEST NUMBER: P925094

CATALOG NUMBER: DFN2DIP-PN4F0-070D080US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	86	89	86	82	80	72	69	67	59	57	56	47	46	45
2	89	82	76	71	81	75	70	66	63	60	56	52	49	47	42	40	38
3	81	72	65	60	74	67	61	56	56	52	48	46	43	40	37	35	33
4	75	64	57	51	68	59	53	48	50	45	41	42	38	35	34	31	29
5	69	57	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23
7	59	47	39	34	54	43	37	32	37	32	28	31	27	24	26	23	20
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	18
9	51	39	32	27	47	36	30	25	31	26	22	26	22	20	22	19	17
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2015	2015	2015
5°	2018	1983	1996
10°	1998	1944	1931
15°	1970	1880	1831
20°	1934	1792	1708
25°	1897	1693	1590
30°	1847	1591	1439
35°	1798	1482	1307
40°	1748	1369	1155
45°	1690	1244	1017
50°	1630	1117	883
55°	1567	981	753
60°	1495	840	621
65°	1411	696	559
70°	1311	561	506
75°	1184	495	461
80°	1000	417	402
85°	696	279	304

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 1892 cd/sqm

TEST NUMBER: P925094

CATALOG NUMBER: DFN2DIP-PN4F0-070D080US950-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	258.7	2.1
10°-20°	710.1	5.7
20°-30°	997.0	8.0
30°-40°	1086.8	8.7
40°-50°	998.8	8.0
50°-60°	784.4	6.3
60°-70°	510.6	4.1
70°-80°	262.8	2.1
80°-90°	74.0	0.6
90°-100°	149.4	1.2
100°-110°	474.6	3.8
110°-120°	812.1	6.5
120°-130°	1068.1	8.6
130°-140°	1198.9	9.6
140°-150°	1175.6	9.5
150°-160°	986.2	7.9
160°-170°	654.0	5.3
170°-180°	228.6	1.8
0°-30°	1965.7	15.8
0°-40°	3052.5	24.6
0°-60°	4835.8	38.9
0°-90°	5683.1	45.7
90°-120°	1436.1	11.6
90°-150°	4878.6	39.2
90°-180°	6747.0	54.3
0°-180°	12430.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2760	2760	2760	2760	2760	
5°	2760	2748	2715	2738	2730	262
15°	2625	2598	2513	2465	2440	740
25°	2383	2303	2138	2036	1998	1096
35°	2053	1926	1706	1549	1494	1285
45°	1679	1511	1249	1071	1012	1296
55°	1276	1082	812	662	615	1140
65°	862	659	435	350	342	854
75°	460	285	200	182	180	486
85°	107	55	47	47	47	123
90°	2	26	71	67	69	12
95°	106	127	130	130	127	118
105°	438	444	448	452	452	462
115°	815	827	823	821	815	806
125°	1185	1204	1198	1191	1189	1059
135°	1533	1556	1560	1558	1552	1185
145°	1861	1876	1888	1890	1882	1163
155°	2128	2134	2141	2151	2144	980
165°	2316	2313	2313	2328	2318	653
175°	2409	2404	2399	2414	2401	229
180°	2414	2414	2414	2414	2414	

TEST NUMBER: P925094

CATALOG NUMBER: DFN2DIP-PN4F0-070D080US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2760.0	2760.0	2760.0	2760.0	2760.0
2.5°	2772.4	2760.0	2732.4	2757.6	2752.6
5°	2760.0	2747.5	2715.0	2737.5	2730.1
7.5°	2737.5	2722.6	2687.7	2697.4	2685.0
10°	2707.5	2690.1	2640.2	2632.6	2617.7
12.5°	2670.2	2647.6	2580.1	2565.2	2537.6
15°	2625.1	2597.6	2512.7	2465.3	2440.4
17.5°	2572.7	2532.7	2427.7	2372.8	2332.8
20°	2512.7	2462.7	2337.9	2275.6	2220.4
22.5°	2447.9	2390.3	2245.3	2160.5	2123.2
25°	2382.9	2302.9	2138.0	2035.7	1998.2
27.5°	2305.5	2220.4	2038.1	1920.8	1863.3
30°	2223.1	2128.0	1928.1	1801.0	1733.4
32.5°	2143.1	2028.1	1823.5	1673.5	1610.9
35°	2053.2	1925.7	1706.1	1548.7	1493.6
37.5°	1965.8	1828.2	1596.1	1423.6	1361.4
40°	1873.3	1723.6	1481.1	1303.8	1238.9
42.5°	1778.4	1618.7	1366.3	1181.3	1119.1
45°	1678.6	1511.0	1249.0	1071.4	1011.5
47.5°	1583.6	1406.4	1136.6	959.1	904.2
50°	1478.7	1301.4	1026.6	854.1	801.9
52.5°	1376.1	1188.8	921.7	756.8	709.4
55°	1276.3	1081.5	811.7	662.0	614.6
57.5°	1174.0	974.1	714.5	574.5	534.5
60°	1069.1	869.2	611.9	484.7	444.7
62.5°	966.7	766.9	524.4	404.7	384.7
65°	861.7	659.3	434.6	349.8	342.1
67.5°	761.9	559.4	349.8	307.1	299.7
70°	656.9	462.1	289.6	264.7	254.6
72.5°	557.0	372.1	242.2	222.4	217.3
75°	459.5	284.6	199.8	182.3	179.9
77.5°	362.2	202.2	157.4	147.3	142.3
80°	272.2	144.9	119.8	110.0	110.0
82.5°	189.8	97.5	82.4	77.4	77.4
85°	107.3	54.9	47.4	47.4	47.4
87.5°	40.0	19.8	19.8	17.5	17.5
90°	2.2	26.2	71.4	67.0	69.2
92.5°	45.1	61.2	63.3	65.4	65.4
95°	106.3	126.6	130.2	130.2	126.6
97.5°	176.9	195.8	203.8	203.8	203.8
100°	258.3	275.0	280.9	280.9	278.7
102.5°	344.2	356.6	364.5	366.7	364.5
105°	438.1	443.9	448.3	451.9	451.9
107.5°	531.2	540.0	540.0	541.4	531.2
110°	621.4	633.1	633.1	633.1	627.3

TEST NUMBER: P925094

CATALOG NUMBER: DFN2DIP-PN4F0-070D080US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	718.9	731.3	729.1	723.3	718.9
115°	815.0	826.6	823.0	820.8	815.0
117.5°	910.3	926.3	916.1	910.3	904.5
120°	1006.4	1022.4	1006.4	1006.4	999.8
122.5°	1093.7	1114.1	1103.9	1098.1	1093.7
125°	1185.3	1203.6	1197.7	1191.2	1189.1
127.5°	1274.9	1297.4	1289.4	1280.7	1274.9
130°	1358.6	1384.7	1381.1	1376.8	1368.8
132.5°	1452.5	1472.8	1474.3	1464.1	1458.3
135°	1533.2	1555.8	1560.2	1558.0	1552.2
137.5°	1623.4	1641.6	1645.3	1643.8	1635.1
140°	1702.8	1720.9	1731.1	1731.1	1723.1
142.5°	1784.3	1802.5	1808.3	1810.5	1802.5
145°	1861.4	1875.9	1887.6	1889.8	1881.8
147.5°	1930.5	1948.7	1957.4	1961.1	1953.1
150°	2001.9	2014.2	2022.2	2028.8	2022.2
152.5°	2065.1	2077.5	2087.7	2095.7	2087.7
155°	2128.5	2134.3	2140.9	2151.0	2144.5
157.5°	2183.0	2187.4	2191.1	2205.6	2195.4
160°	2231.8	2236.2	2238.4	2250.7	2242.0
162.5°	2276.9	2276.9	2279.1	2292.9	2282.7
165°	2315.5	2313.3	2313.3	2327.9	2317.6
167.5°	2350.4	2343.9	2343.9	2358.4	2348.2
170°	2376.6	2370.8	2368.6	2383.2	2370.8
172.5°	2394.8	2389.0	2386.8	2401.3	2389.0
175°	2409.3	2403.5	2399.1	2413.7	2401.3
177.5°	2417.3	2411.5	2407.1	2419.5	2407.1
180°	2413.7	2413.7	2413.7	2413.7	2413.7

TEST NUMBER: P925094

CATALOG NUMBER: DFN2DIP-PN4F0-070D080US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.17	9.97	10.17	10.97	12.31	5.14	5.93	6.14	6.94	8.27
	3H	10.85	11.56	11.86	12.58	13.93	6.32	7.04	7.33	8.05	9.41
	4H	11.46	12.13	12.48	13.15	14.51	6.77	7.45	7.80	8.46	9.83
	6H	11.88	12.50	12.91	13.52	14.90	7.09	7.71	8.13	8.74	10.11
	8H	12.01	12.60	13.05	13.64	15.01	7.18	7.77	8.22	8.81	10.18
	12H	12.07	12.63	13.11	13.66	15.06	7.23	7.79	8.27	8.82	10.21
4H	2H	9.19	9.86	10.22	10.88	12.24	5.73	6.40	6.76	7.42	8.78
	3H	11.02	11.58	12.05	12.62	14.00	7.08	7.64	8.11	8.68	10.06
	4H	11.71	12.22	12.75	13.26	14.66	7.63	8.14	8.67	9.18	10.57
	6H	12.22	12.66	13.28	13.73	15.12	8.04	8.48	9.10	9.55	10.94
	8H	12.40	12.81	13.46	13.87	15.27	8.17	8.58	9.23	9.64	11.05
	12H	12.50	12.87	13.57	13.94	15.35	8.24	8.61	9.31	9.68	11.09
8H	4H	11.67	12.08	12.73	13.14	14.55	7.90	8.32	8.96	9.37	10.78
	6H	12.24	12.58	13.32	13.68	15.08	8.42	8.76	9.50	9.86	11.26
	8H	12.46	12.76	13.55	13.84	15.26	8.61	8.91	9.70	9.99	11.42
	12H	12.60	12.86	13.69	13.94	15.40	8.73	9.00	9.82	10.07	11.54
12H	4H	11.62	12.00	12.70	13.06	14.48	7.91	8.28	8.98	9.35	10.76
	6H	12.22	12.52	13.30	13.60	15.02	8.47	8.77	9.56	9.85	11.28
	8H	12.44	12.70	13.53	13.78	15.24	8.68	8.95	9.77	10.02	11.49

END OF REPORT