

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925192

Luminaire Tested: DFN2DIP-PN4F0-100D060US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925192
REPORT IS A COMBINATION OF REPORTS P899657 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D060US950-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14510.4 lumens
Efficiency: N/A
Efficacy: 99.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 146.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925192

CATALOG NUMBER: DFN2DIP-PN4F0-100D060US950-FLLFLL

Luminous Intensity Polar Plot

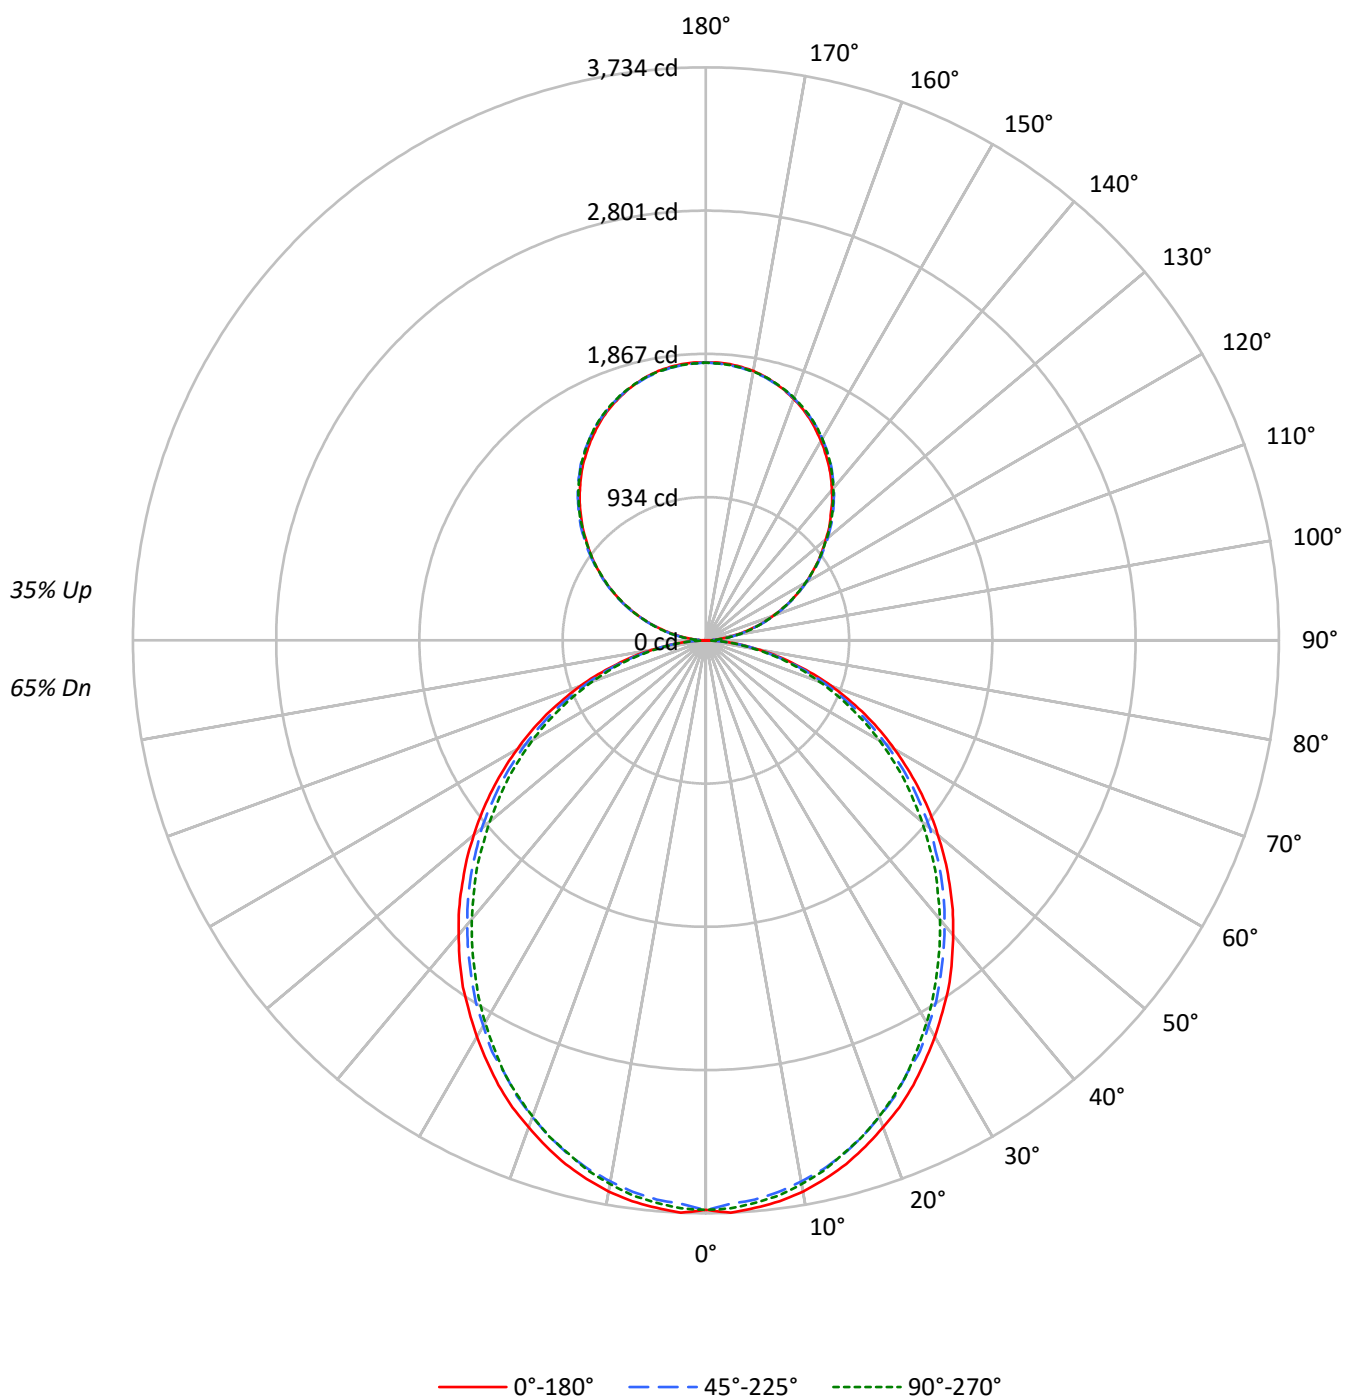

TEST NUMBER: P925192

CATALOG NUMBER: DFN2DIP-PN4F0-100D060US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	111	111	111	111	104	104	104	104	92	92	92	80	80	80	70	70	70
1	101	97	93	89	95	91	88	84	81	78	75	71	69	67	62	60	59
2	92	85	78	73	86	80	74	69	71	66	63	62	59	56	55	52	50
3	84	74	67	61	79	70	63	58	62	57	53	55	51	47	48	45	42
4	77	66	58	52	72	62	55	49	55	50	45	49	44	41	43	40	37
5	71	59	50	44	66	56	48	42	50	44	39	44	39	35	39	35	32
6	65	53	45	39	61	50	43	37	45	39	34	40	35	31	35	31	28
7	60	48	40	34	57	45	38	33	41	35	30	36	31	28	32	28	25
8	56	44	36	30	53	41	34	29	37	31	27	33	28	25	30	26	22
9	52	40	32	27	49	38	31	26	34	28	24	31	26	22	27	23	20
10	49	37	29	24	46	35	28	23	32	26	22	28	24	20	25	21	19

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2710	2710	2710
5°	2714	2672	2690
10°	2692	2637	2654
15°	2652	2594	2598
20°	2599	2534	2540
25°	2546	2462	2473
30°	2479	2395	2388
35°	2416	2316	2298
40°	2338	2237	2212
45°	2260	2157	2125
50°	2176	2073	2023
55°	2087	1977	1930
60°	1986	1862	1823
65°	1877	1743	1697
70°	1738	1598	1562
75°	1544	1424	1438
80°	1312	1203	1199
85°	949	822	802

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2260 cd/sqm

TEST NUMBER: P925192

CATALOG NUMBER: DFN2DIP-PN4F0-100D060US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	349.4	2.4
10°-20°	983.0	6.8
20°-30°	1444.7	10.0
30°-40°	1677.9	11.6
40°-50°	1675.8	11.5
50°-60°	1461.2	10.1
60°-70°	1080.2	7.4
70°-80°	611.1	4.2
80°-90°	166.5	1.1
90°-100°	112.0	0.8
100°-110°	355.9	2.5
110°-120°	609.1	4.2
120°-130°	801.1	5.5
130°-140°	899.2	6.2
140°-150°	881.7	6.1
150°-160°	739.6	5.1
160°-170°	490.5	3.4
170°-180°	171.4	1.2
0°-30°	2777.1	19.1
0°-40°	4454.9	30.7
0°-60°	7592.0	52.3
0°-90°	9449.7	65.1
90°-120°	1077.0	7.4
90°-150°	3659.0	25.2
90°-180°	5061.0	34.9
0°-180°	14510.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3712	3712	3712	3712	3712	
5°	3712	3698	3659	3687	3680	352
15°	3534	3512	3466	3480	3462	995
25°	3198	3170	3109	3116	3109	1472
35°	2759	2724	2666	2645	2627	1723
45°	2245	2220	2166	2128	2113	1733
55°	1699	1678	1635	1592	1574	1519
65°	1146	1124	1089	1057	1039	1133
75°	600	593	574	553	560	640
85°	146	143	139	128	125	163
90°	2	20	54	50	52	14
95°	80	95	98	98	95	89
105°	329	333	336	339	339	347
115°	611	620	617	616	611	605
125°	889	903	898	893	892	794
135°	1150	1167	1170	1168	1164	889
145°	1396	1407	1416	1417	1411	872
155°	1596	1601	1606	1613	1608	735
165°	1737	1735	1735	1746	1738	490
175°	1807	1803	1799	1810	1801	172
180°	1810	1810	1810	1810	1810	

TEST NUMBER: P925192

CATALOG NUMBER: DFN2DIP-PN4F0-100D060US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3712.1	3712.1	3712.1	3712.1	3712.1
2.5°	3733.7	3715.8	3676.4	3712.1	3705.2
5°	3712.1	3698.1	3658.7	3687.1	3680.2
7.5°	3687.1	3665.8	3626.4	3655.3	3648.1
10°	3648.1	3623.1	3580.3	3608.7	3598.1
12.5°	3594.3	3573.1	3530.3	3548.1	3540.9
15°	3533.7	3512.5	3465.9	3480.3	3462.5
17.5°	3458.7	3437.5	3390.9	3408.7	3390.9
20°	3376.5	3355.3	3305.3	3315.9	3301.9
22.5°	3294.7	3262.6	3215.9	3215.9	3208.8
25°	3198.2	3169.8	3109.2	3116.0	3109.2
27.5°	3091.0	3066.0	3019.8	3009.2	2991.4
30°	2984.2	2955.4	2902.0	2891.4	2877.0
32.5°	2869.8	2848.6	2791.4	2769.8	2755.4
35°	2759.3	2723.7	2666.4	2644.9	2627.0
37.5°	2634.3	2602.0	2544.9	2519.9	2502.1
40°	2505.9	2477.1	2419.9	2388.1	2373.7
42.5°	2380.9	2352.1	2295.3	2259.4	2238.2
45°	2245.3	2220.3	2166.5	2127.5	2113.2
47.5°	2113.2	2088.2	2031.0	1991.6	1970.4
50°	1973.8	1956.0	1906.0	1856.0	1838.3
52.5°	1838.3	1813.3	1767.0	1727.7	1702.7
55°	1699.3	1677.7	1634.9	1592.0	1574.3
57.5°	1559.9	1542.0	1495.5	1452.8	1438.3
60°	1420.5	1406.5	1356.5	1317.1	1306.5
62.5°	1284.9	1259.9	1224.4	1188.8	1174.4
65°	1145.9	1124.4	1088.8	1056.6	1038.8
67.5°	1003.2	985.0	953.2	928.2	913.8
70°	871.0	856.6	824.4	799.5	785.4
72.5°	735.4	721.0	703.3	678.3	667.6
75°	599.5	592.7	574.5	553.3	560.5
77.5°	478.3	463.9	456.7	446.1	435.5
80°	357.1	353.4	346.1	335.5	328.4
82.5°	242.8	242.8	239.4	225.0	225.0
85°	146.2	142.8	139.4	128.4	125.0
87.5°	64.4	57.1	50.0	39.4	35.6
90°	1.6	19.7	53.5	50.2	51.8
92.5°	33.9	45.9	47.5	49.1	49.1
95°	79.7	94.9	97.7	97.7	94.9
97.5°	132.6	146.8	152.8	152.8	152.8
100°	193.8	206.3	210.6	210.6	209.0
102.5°	258.2	267.4	273.4	275.0	273.4
105°	328.6	332.9	336.2	339.0	339.0
107.5°	398.4	405.0	405.0	406.0	398.4
110°	466.1	474.8	474.8	474.8	470.4

TEST NUMBER: P925192

CATALOG NUMBER: DFN2DIP-PN4F0-100D060US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	539.2	548.5	546.8	542.4	539.2
115°	611.2	620.0	617.2	615.6	611.2
117.5°	682.8	694.8	687.1	682.8	678.4
120°	754.8	766.8	754.8	754.8	749.8
122.5°	820.2	835.5	827.9	823.6	820.2
125°	889.0	902.7	898.3	893.4	891.8
127.5°	956.2	973.1	967.1	960.6	956.2
130°	1019.0	1038.6	1035.9	1032.6	1026.6
132.5°	1089.4	1104.6	1105.7	1098.1	1093.7
135°	1150.0	1166.8	1170.1	1168.5	1164.1
137.5°	1217.6	1231.2	1234.0	1232.9	1226.4
140°	1277.1	1290.8	1298.4	1298.4	1292.4
142.5°	1338.2	1351.8	1356.2	1357.8	1351.8
145°	1396.1	1407.0	1415.7	1417.4	1411.3
147.5°	1447.9	1461.5	1468.1	1470.8	1464.8
150°	1501.4	1510.7	1516.7	1521.5	1516.7
152.5°	1548.8	1558.2	1565.8	1571.8	1565.8
155°	1596.3	1600.7	1605.6	1613.3	1608.3
157.5°	1637.3	1640.6	1643.3	1654.2	1646.6
160°	1673.9	1677.1	1678.8	1688.0	1681.5
162.5°	1707.7	1707.7	1709.3	1719.7	1712.0
165°	1736.6	1734.9	1734.9	1745.9	1738.3
167.5°	1762.8	1757.9	1757.9	1768.8	1761.2
170°	1782.5	1778.1	1776.4	1787.3	1778.1
172.5°	1796.1	1791.7	1790.1	1801.0	1791.7
175°	1807.0	1802.7	1799.3	1810.3	1801.0
177.5°	1813.0	1808.7	1805.3	1814.6	1805.3
180°	1810.3	1810.3	1810.3	1810.3	1810.3

TEST NUMBER: P925192

CATALOG NUMBER: DFN2DIP-PN4F0-100D060US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.03	13.05	12.85	13.88	14.92	11.59	12.61	12.41	13.45	14.48
	3H	13.71	14.62	14.53	15.47	16.53	13.22	14.13	14.05	14.98	16.05
	4H	14.30	15.16	15.15	16.02	17.10	13.82	14.68	14.66	15.53	16.61
	6H	14.71	15.51	15.57	16.37	17.46	14.22	15.02	15.08	15.88	16.97
	8H	14.82	15.58	15.69	16.46	17.55	14.33	15.09	15.20	15.97	17.06
	12H	14.88	15.60	15.75	16.47	17.59	14.38	15.10	15.25	15.97	17.09
4H	2H	12.51	13.37	13.36	14.23	15.30	12.16	13.02	13.01	13.88	14.95
	3H	14.39	15.11	15.26	16.00	17.09	13.99	14.71	14.85	15.60	16.69
	4H	15.12	15.77	15.99	16.66	17.78	14.70	15.36	15.57	16.24	17.36
	6H	15.64	16.21	16.53	17.12	18.24	15.22	15.79	16.11	16.70	17.82
	8H	15.80	16.33	16.69	17.23	18.37	15.37	15.90	16.26	16.80	17.94
	12H	15.88	16.36	16.79	17.28	18.42	15.44	15.92	16.35	16.84	17.98
8H	4H	15.33	15.86	16.22	16.76	17.89	14.96	15.49	15.85	16.39	17.52
	6H	15.97	16.41	16.89	17.35	18.49	15.59	16.03	16.51	16.97	18.11
	8H	16.19	16.58	17.12	17.52	18.67	15.81	16.20	16.74	17.13	18.28
	12H	16.33	16.68	17.26	17.60	18.81	15.93	16.27	16.86	17.20	18.41
12H	4H	15.32	15.80	16.23	16.72	17.86	14.96	15.43	15.87	16.36	17.50
	6H	16.00	16.39	16.93	17.33	18.48	15.63	16.02	16.56	16.96	18.11
	8H	16.25	16.59	17.18	17.52	18.73	15.88	16.22	16.81	17.15	18.35

END OF REPORT