

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925205

Luminaire Tested: DFN2DIP-PN4F0-100D090US950-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925205
REPORT IS A COMBINATION OF REPORTS P901231 AND P898053
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-100D090US950-FLLONL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 17944.7 lumens
Efficiency: N/A
Efficacy: 107.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 167.6
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925205

CATALOG NUMBER: DFN2DIP-PN4F0-100D090US950-FLLONL

Luminous Intensity Polar Plot

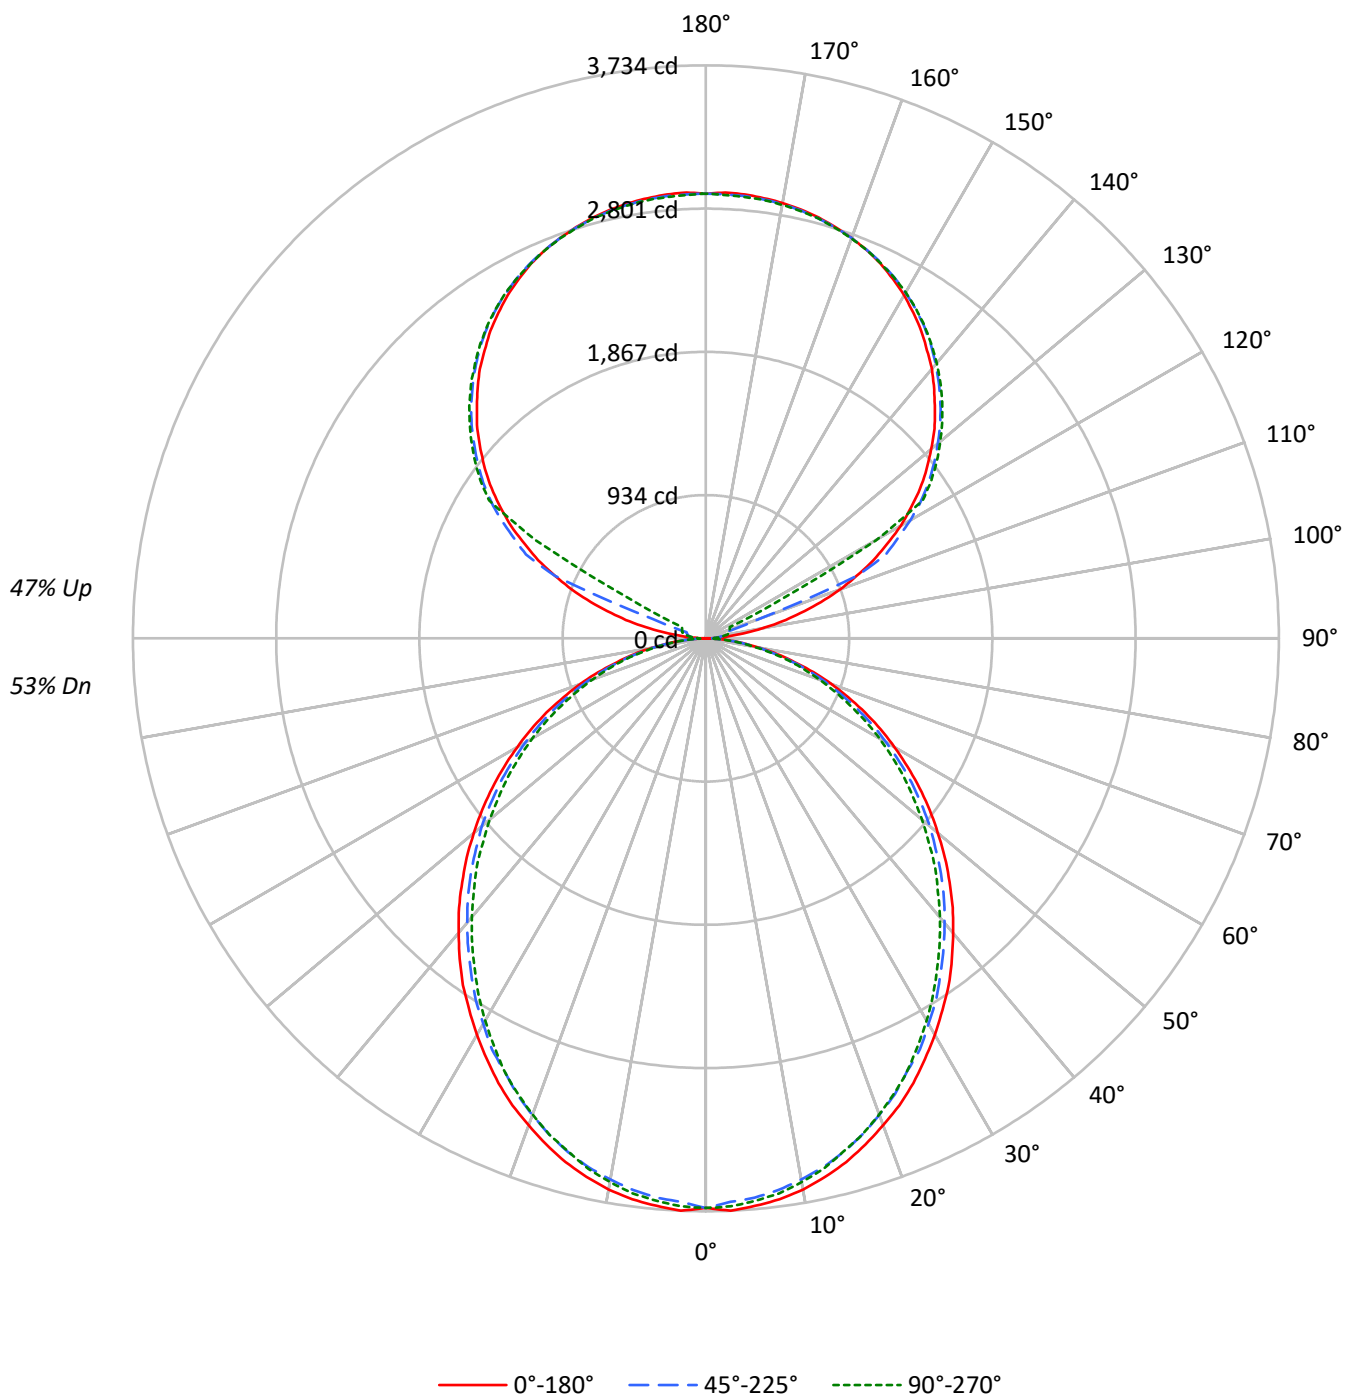

TEST NUMBER: P925205

CATALOG NUMBER: DFN2DIP-PN4F0-100D090US950-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	49
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	40	38	35
4	75	64	56	50	69	59	52	47	51	46	41	43	39	36	36	33	31
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27
6	63	51	43	37	58	48	40	35	41	35	31	35	31	27	30	26	23
7	59	46	38	33	54	43	36	31	37	32	27	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	28	24	29	25	22	25	21	19
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	19	17
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2710	2710	2710
5°	2714	2672	2690
10°	2692	2637	2654
15°	2652	2594	2598
20°	2599	2534	2540
25°	2546	2462	2473
30°	2479	2395	2388
35°	2416	2316	2298
40°	2338	2237	2212
45°	2260	2157	2125
50°	2176	2073	2023
55°	2087	1977	1930
60°	1986	1862	1823
65°	1877	1743	1697
70°	1738	1598	1562
75°	1544	1424	1438
80°	1312	1203	1199
85°	949	822	802

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2260 cd/sqm

TEST NUMBER: P925205

CATALOG NUMBER: DFN2DIP-PN4F0-100D090US950-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	349.4	1.9
10°-20°	983.0	5.5
20°-30°	1444.7	8.1
30°-40°	1677.9	9.4
40°-50°	1675.8	9.3
50°-60°	1461.2	8.1
60°-70°	1080.2	6.0
70°-80°	611.1	3.4
80°-90°	166.4	0.9
90°-100°	95.6	0.5
100°-110°	356.2	2.0
110°-120°	944.7	5.3
120°-130°	1566.8	8.7
130°-140°	1664.3	9.3
140°-150°	1546.8	8.6
150°-160°	1243.6	6.9
160°-170°	801.3	4.5
170°-180°	275.8	1.5
0°-30°	2777.1	15.5
0°-40°	4454.9	24.8
0°-60°	7592.0	42.3
0°-90°	9449.7	52.7
90°-120°	1396.4	7.8
90°-150°	6174.3	34.4
90°-180°	8495.0	47.3
0°-180°	17944.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3712	3712	3712	3712	3712	
5°	3712	3698	3659	3687	3680	352
15°	3534	3512	3466	3480	3462	995
25°	3198	3170	3109	3116	3109	1472
35°	2759	2724	2666	2645	2627	1723
45°	2245	2220	2166	2128	2113	1733
55°	1699	1678	1635	1592	1574	1519
65°	1146	1124	1089	1057	1039	1133
75°	600	593	574	553	560	640
85°	146	143	139	128	125	163
90°	2	25	42	53	56	17
95°	136	67	82	92	90	161
105°	637	700	128	151	159	681
115°	1206	1241	1294	323	172	1187
125°	1704	1732	1772	1786	1793	1520
135°	2109	2143	2162	2183	2179	1629
145°	2447	2445	2480	2495	2485	1530
155°	2694	2676	2701	2713	2696	1242
165°	2839	2826	2833	2847	2833	802
175°	2904	2889	2894	2908	2887	276
180°	2898	2898	2898	2898	2898	

TEST NUMBER: P925205

CATALOG NUMBER: DFN2DIP-PN4F0-100D090US950-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3712.1	3712.1	3712.1	3712.1	3712.1
2.5°	3733.7	3715.8	3676.4	3712.1	3705.2
5°	3712.1	3698.1	3658.7	3687.1	3680.2
7.5°	3687.1	3665.8	3626.4	3655.3	3648.1
10°	3648.1	3623.1	3580.3	3608.7	3598.1
12.5°	3594.3	3573.1	3530.3	3548.1	3540.9
15°	3533.7	3512.5	3465.9	3480.3	3462.5
17.5°	3458.7	3437.5	3390.9	3408.7	3390.9
20°	3376.5	3355.3	3305.3	3315.9	3301.9
22.5°	3294.7	3262.6	3215.9	3215.9	3208.8
25°	3198.2	3169.8	3109.2	3116.0	3109.2
27.5°	3091.0	3066.0	3019.8	3009.2	2991.4
30°	2984.2	2955.4	2902.0	2891.4	2877.0
32.5°	2869.8	2848.6	2791.4	2769.8	2755.4
35°	2759.3	2723.7	2666.4	2644.9	2627.0
37.5°	2634.3	2602.0	2544.9	2519.9	2502.1
40°	2505.9	2477.1	2419.9	2388.1	2373.7
42.5°	2380.9	2352.1	2295.3	2259.4	2238.2
45°	2245.3	2220.3	2166.5	2127.5	2113.2
47.5°	2113.2	2088.2	2031.0	1991.6	1970.4
50°	1973.8	1956.0	1906.0	1856.0	1838.3
52.5°	1838.3	1813.3	1767.0	1727.7	1702.7
55°	1699.3	1677.7	1634.9	1592.0	1574.3
57.5°	1559.9	1542.0	1495.5	1452.8	1438.3
60°	1420.5	1406.5	1356.5	1317.1	1306.5
62.5°	1284.9	1259.9	1224.4	1188.8	1174.4
65°	1145.9	1124.4	1088.8	1056.6	1038.8
67.5°	1003.2	985.0	953.2	928.2	913.8
70°	871.0	856.6	824.4	799.5	785.4
72.5°	735.4	721.0	703.3	678.3	667.6
75°	599.5	592.7	574.5	553.3	560.5
77.5°	478.3	463.9	456.7	446.1	435.5
80°	357.1	353.4	346.1	335.5	328.4
82.5°	242.8	242.8	239.4	225.0	225.0
85°	146.2	142.8	139.4	128.4	125.0
87.5°	64.4	57.1	50.0	39.4	35.6
90°	2.0	25.2	41.8	52.6	56.5
92.5°	52.6	44.1	50.3	54.6	56.5
95°	136.2	67.0	81.7	92.3	90.2
97.5°	245.3	73.5	106.8	113.2	115.2
100°	371.2	84.0	119.5	136.2	140.4
102.5°	509.4	505.4	123.7	146.6	153.1
105°	637.4	700.4	127.9	150.9	159.3
107.5°	786.3	838.6	132.2	155.1	163.6
110°	928.9	972.8	367.0	157.3	165.6

TEST NUMBER: P925205

CATALOG NUMBER: DFN2DIP-PN4F0-100D090US950-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1063.1	1100.7	1065.1	161.3	167.8
115°	1205.6	1241.2	1293.7	322.9	172.0
117.5°	1329.3	1371.2	1407.0	1107.0	557.7
120°	1467.7	1499.1	1537.0	1562.1	1279.0
122.5°	1585.1	1618.7	1660.7	1673.1	1675.4
125°	1704.5	1731.9	1771.8	1786.5	1792.7
127.5°	1813.6	1842.9	1874.6	1895.5	1897.5
130°	1916.4	1950.1	1973.0	1996.1	1994.1
132.5°	2021.2	2048.6	2071.5	2090.5	2088.5
135°	2109.4	2143.0	2161.7	2182.8	2178.6
137.5°	2201.5	2226.6	2247.8	2268.7	2262.5
140°	2291.6	2308.6	2331.5	2350.4	2340.0
142.5°	2367.4	2382.0	2409.1	2425.8	2415.4
145°	2447.0	2444.7	2480.4	2495.1	2484.6
147.5°	2516.0	2509.8	2545.4	2555.9	2547.6
150°	2583.2	2568.5	2602.1	2614.5	2604.1
152.5°	2639.7	2623.0	2654.4	2667.1	2652.4
155°	2694.3	2675.6	2700.7	2713.2	2696.5
157.5°	2738.4	2721.7	2740.6	2755.2	2738.4
160°	2776.1	2763.5	2776.1	2788.6	2773.9
162.5°	2809.5	2797.0	2807.5	2822.2	2803.3
165°	2838.9	2826.4	2832.7	2847.4	2832.7
167.5°	2862.1	2849.4	2855.8	2870.5	2851.6
170°	2881.0	2868.3	2872.5	2887.2	2868.3
172.5°	2893.5	2881.0	2885.2	2899.9	2881.0
175°	2903.9	2889.2	2893.5	2908.1	2887.2
177.5°	2908.1	2893.5	2895.7	2910.4	2891.5
180°	2897.7	2897.7	2897.7	2897.7	2897.7

TEST NUMBER: P925205

CATALOG NUMBER: DFN2DIP-PN4F0-100D090US950-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.98	11.87	11.92	12.82	14.05	10.55	11.43	11.48	12.38	13.61
	3H	12.65	13.44	13.60	14.40	15.66	12.17	12.96	13.11	13.92	15.18
	4H	13.24	13.99	14.20	14.96	16.22	12.75	13.51	13.71	14.47	15.74
	6H	13.64	14.34	14.61	15.31	16.59	13.15	13.85	14.12	14.82	16.09
	8H	13.75	14.41	14.73	15.40	16.67	13.26	13.92	14.24	14.91	16.18
	12H	13.80	14.43	14.78	15.41	16.71	13.30	13.93	14.28	14.91	16.21
4H	2H	11.45	12.20	12.41	13.17	14.43	11.10	11.85	12.06	12.82	14.08
	3H	13.32	13.95	14.30	14.94	16.22	12.92	13.55	13.89	14.54	15.82
	4H	14.04	14.61	15.02	15.60	16.90	13.62	14.19	14.61	15.18	16.49
	6H	14.56	15.05	15.55	16.06	17.36	14.13	14.63	15.13	15.64	16.94
	8H	14.71	15.17	15.71	16.18	17.49	14.28	14.74	15.28	15.75	17.06
	12H	14.79	15.20	15.80	16.22	17.54	14.35	14.76	15.36	15.78	17.10
8H	4H	14.24	14.70	15.24	15.70	17.02	13.87	14.33	14.86	15.33	16.65
	6H	14.87	15.26	15.90	16.30	17.62	14.50	14.88	15.52	15.93	17.24
	8H	15.10	15.43	16.13	16.47	17.80	14.71	15.05	15.74	16.08	17.41
	12H	15.23	15.53	16.27	16.55	17.93	14.83	15.13	15.86	16.15	17.53
12H	4H	14.22	14.64	15.24	15.66	16.98	13.86	14.28	14.88	15.30	16.62
	6H	14.90	15.24	15.93	16.27	17.61	14.54	14.88	15.57	15.91	17.24
	8H	15.15	15.45	16.18	16.47	17.85	14.78	15.07	15.81	16.10	17.48

END OF REPORT