

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925230

Luminaire Tested: DFN2DIP-PN4F0-110D060US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925230
REPORT IS A COMBINATION OF REPORTS P899660 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-110D060US950-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13985.7 lumens
Efficiency: N/A
Efficacy: 87.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 159.4
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925230

CATALOG NUMBER: DFN2DIP-PN4F0-110D060US950-RLLFLL

Luminous Intensity Polar Plot

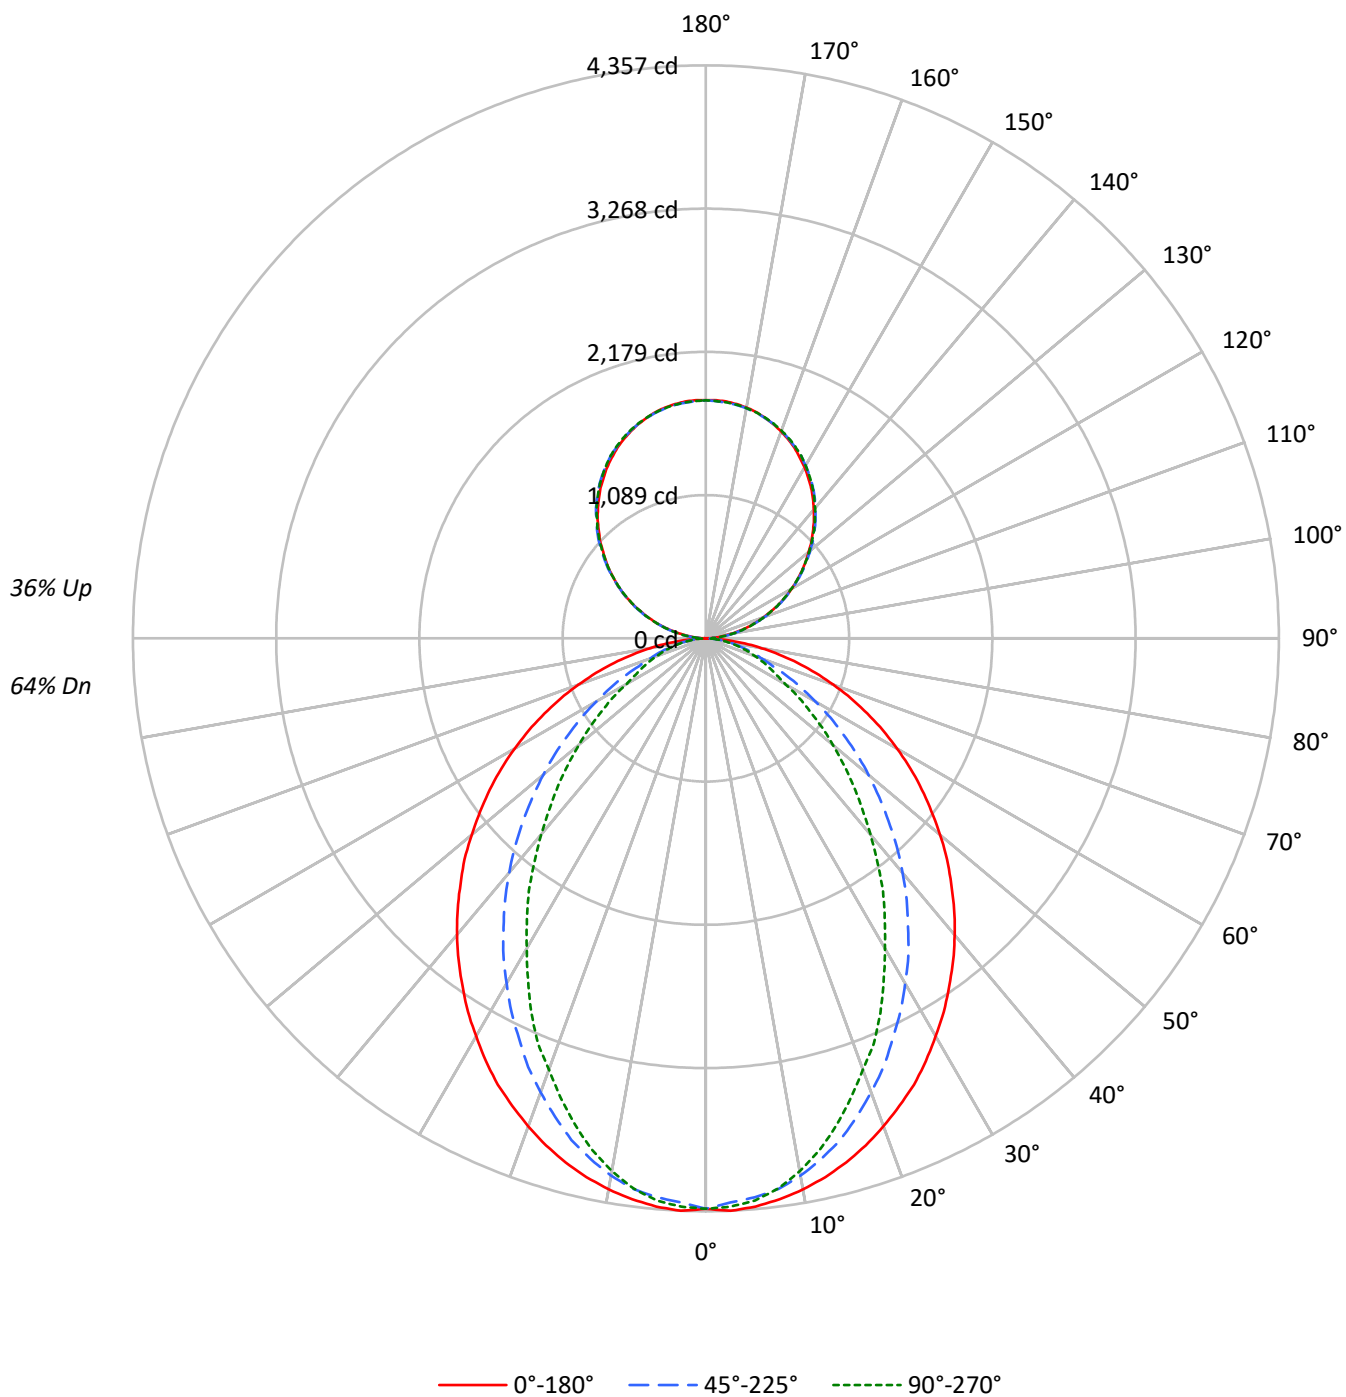

TEST NUMBER: P925230

CATALOG NUMBER: DFN2DIP-PN4F0-110D060US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	104	104	104	104	91	91	91	79	79	79	69	69	69
1	101	97	94	90	95	92	88	85	81	78	76	71	69	67	62	61	59
2	93	86	80	75	87	81	76	71	72	68	64	63	60	57	55	53	51
3	85	76	69	63	80	72	65	60	64	59	55	56	52	49	49	47	44
4	78	68	60	54	73	64	57	52	57	52	47	51	46	43	45	41	39
5	72	61	53	47	68	58	50	45	51	46	41	46	41	38	40	37	34
6	67	55	47	41	63	52	45	39	47	41	36	42	37	33	37	33	30
7	62	50	42	36	58	47	40	35	43	37	32	38	33	30	34	30	27
8	58	45	38	32	54	43	36	31	39	33	29	35	30	27	31	27	25
9	54	42	34	29	51	40	33	28	36	30	26	32	28	24	29	25	22
10	50	38	31	26	48	37	30	26	33	28	24	30	25	22	27	23	20

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3166	3166	3166
5°	3171	3116	3136
10°	3140	3055	3035
15°	3096	2955	2877
20°	3039	2816	2684
25°	2981	2660	2498
30°	2902	2501	2261
35°	2825	2329	2053
40°	2747	2151	1814
45°	2655	1954	1598
50°	2561	1755	1387
55°	2463	1542	1184
60°	2349	1320	975
65°	2218	1093	878
70°	2059	882	796
75°	1860	779	725
80°	1572	654	631
85°	1095	439	478

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2655 cd/sqm

TEST NUMBER: P925230

CATALOG NUMBER: DFN2DIP-PN4F0-110D060US950-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.5	2.9
10°-20°	1115.9	8.0
20°-30°	1566.7	11.2
30°-40°	1707.7	12.2
40°-50°	1569.6	11.2
50°-60°	1232.7	8.8
60°-70°	802.4	5.7
70°-80°	413.0	3.0
80°-90°	110.6	0.8
90°-100°	112.0	0.8
100°-110°	355.9	2.5
110°-120°	609.1	4.4
120°-130°	801.1	5.7
130°-140°	899.2	6.4
140°-150°	881.7	6.3
150°-160°	739.6	5.3
160°-170°	490.5	3.5
170°-180°	171.4	1.2
0°-30°	3089.0	22.1
0°-40°	4796.8	34.3
0°-60°	7599.1	54.3
0°-90°	8925.1	63.8
90°-120°	1077.0	7.7
90°-150°	3659.0	26.2
90°-180°	5061.0	36.2
0°-180°	13985.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4337	4337	4337	4337	4337	
5°	4337	4318	4266	4302	4290	411
15°	4125	4082	3949	3874	3835	1162
25°	3744	3619	3360	3199	3140	1722
35°	3226	3026	2681	2434	2347	2019
45°	2638	2374	1963	1684	1590	2037
55°	2006	1700	1276	1040	966	1792
65°	1354	1036	683	550	538	1343
75°	722	447	314	286	283	764
85°	169	86	74	74	74	194
90°	2	20	54	50	52	14
95°	80	95	98	98	95	89
105°	329	333	336	339	339	347
115°	611	620	617	616	611	605
125°	889	903	898	893	892	794
135°	1150	1167	1170	1168	1164	889
145°	1396	1407	1416	1417	1411	872
155°	1596	1601	1606	1613	1608	735
165°	1737	1735	1735	1746	1738	490
175°	1807	1803	1799	1810	1801	172
180°	1810	1810	1810	1810	1810	

TEST NUMBER: P925230

CATALOG NUMBER: DFN2DIP-PN4F0-110D060US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4337.2	4337.2	4337.2	4337.2	4337.2
2.5°	4356.7	4337.2	4293.9	4333.4	4325.5
5°	4337.2	4317.6	4266.4	4301.8	4290.1
7.5°	4301.8	4278.4	4223.5	4238.9	4219.3
10°	4254.7	4227.2	4148.9	4136.8	4113.6
12.5°	4196.0	4160.6	4054.4	4031.0	3987.7
15°	4125.2	4081.9	3948.6	3874.1	3834.9
17.5°	4042.8	3979.9	3815.0	3728.7	3665.8
20°	3948.6	3869.9	3673.8	3575.9	3489.3
22.5°	3846.6	3756.2	3528.5	3395.2	3336.4
25°	3744.5	3618.8	3359.8	3199.0	3139.9
27.5°	3623.0	3489.3	3202.8	3018.3	2927.9
30°	3493.5	3344.0	3030.0	2830.0	2723.9
32.5°	3367.7	3186.9	2865.4	2629.8	2531.5
35°	3226.5	3026.2	2681.0	2433.7	2347.0
37.5°	3089.1	2873.0	2508.2	2237.0	2139.2
40°	2943.8	2708.5	2327.5	2048.8	1946.8
42.5°	2794.6	2543.6	2147.2	1856.5	1758.6
45°	2637.7	2374.5	1962.7	1683.6	1589.6
47.5°	2488.6	2210.0	1786.1	1507.0	1420.9
50°	2323.7	2045.1	1613.3	1342.2	1260.1
52.5°	2162.5	1868.1	1448.4	1189.4	1114.7
55°	2005.5	1699.5	1275.5	1040.2	965.7
57.5°	1844.8	1530.8	1122.7	902.9	839.9
60°	1679.9	1365.9	961.5	761.7	698.8
62.5°	1519.1	1205.2	824.2	635.9	604.6
65°	1354.2	1036.0	683.0	549.7	537.6
67.5°	1197.3	879.1	549.7	482.6	471.0
70°	1032.3	726.3	455.2	416.0	400.2
72.5°	875.3	584.7	380.6	349.4	341.4
75°	722.1	447.2	314.0	286.5	282.8
77.5°	569.3	317.8	247.4	231.5	223.6
80°	427.7	227.8	188.2	172.9	172.9
82.5°	298.1	153.2	129.6	121.6	121.6
85°	168.7	86.2	74.5	74.5	74.5
87.5°	62.9	31.2	31.2	27.5	27.5
90°	1.6	19.7	53.5	50.2	51.8
92.5°	33.9	45.9	47.5	49.1	49.1
95°	79.7	94.9	97.7	97.7	94.9
97.5°	132.6	146.8	152.8	152.8	152.8
100°	193.8	206.3	210.6	210.6	209.0
102.5°	258.2	267.4	273.4	275.0	273.4
105°	328.6	332.9	336.2	339.0	339.0
107.5°	398.4	405.0	405.0	406.0	398.4
110°	466.1	474.8	474.8	474.8	470.4

TEST NUMBER: P925230

CATALOG NUMBER: DFN2DIP-PN4F0-110D060US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	539.2	548.5	546.8	542.4	539.2
115°	611.2	620.0	617.2	615.6	611.2
117.5°	682.8	694.8	687.1	682.8	678.4
120°	754.8	766.8	754.8	754.8	749.8
122.5°	820.2	835.5	827.9	823.6	820.2
125°	889.0	902.7	898.3	893.4	891.8
127.5°	956.2	973.1	967.1	960.6	956.2
130°	1019.0	1038.6	1035.9	1032.6	1026.6
132.5°	1089.4	1104.6	1105.7	1098.1	1093.7
135°	1150.0	1166.8	1170.1	1168.5	1164.1
137.5°	1217.6	1231.2	1234.0	1232.9	1226.4
140°	1277.1	1290.8	1298.4	1298.4	1292.4
142.5°	1338.2	1351.8	1356.2	1357.8	1351.8
145°	1396.1	1407.0	1415.7	1417.4	1411.3
147.5°	1447.9	1461.5	1468.1	1470.8	1464.8
150°	1501.4	1510.7	1516.7	1521.5	1516.7
152.5°	1548.8	1558.2	1565.8	1571.8	1565.8
155°	1596.3	1600.7	1605.6	1613.3	1608.3
157.5°	1637.3	1640.6	1643.3	1654.2	1646.6
160°	1673.9	1677.1	1678.8	1688.0	1681.5
162.5°	1707.7	1707.7	1709.3	1719.7	1712.0
165°	1736.6	1734.9	1734.9	1745.9	1738.3
167.5°	1762.8	1757.9	1757.9	1768.8	1761.2
170°	1782.5	1778.1	1776.4	1787.3	1778.1
172.5°	1796.1	1791.7	1790.1	1801.0	1791.7
175°	1807.0	1802.7	1799.3	1810.3	1801.0
177.5°	1813.0	1808.7	1805.3	1814.6	1805.3
180°	1810.3	1810.3	1810.3	1810.3	1810.3

TEST NUMBER: P925230

CATALOG NUMBER: DFN2DIP-PN4F0-110D060US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.36	13.32	13.19	14.17	15.23	8.32	9.28	9.16	10.13	11.20
	3H	14.05	14.90	14.90	15.77	16.86	9.52	10.38	10.37	11.24	12.33
	4H	14.66	15.47	15.53	16.34	17.44	9.98	10.79	10.84	11.66	12.76
	6H	15.10	15.84	15.97	16.72	17.83	10.31	11.05	11.18	11.93	13.04
	8H	15.23	15.93	16.11	16.83	17.94	10.40	11.11	11.29	12.00	13.12
	12H	15.29	15.97	16.18	16.86	17.99	10.45	11.12	11.34	12.01	13.15
4H	2H	12.39	13.20	13.26	14.07	15.17	8.94	9.74	9.81	10.61	11.71
	3H	14.24	14.91	15.12	15.81	16.92	10.30	10.97	11.18	11.87	12.99
	4H	14.94	15.55	15.83	16.44	17.59	10.85	11.46	11.74	12.36	13.50
	6H	15.46	15.99	16.37	16.91	18.05	11.28	11.81	12.19	12.73	13.87
	8H	15.64	16.13	16.55	17.05	18.20	11.41	11.90	12.32	12.82	13.98
	12H	15.74	16.18	16.67	17.12	18.28	11.48	11.92	12.41	12.86	14.02
8H	4H	14.91	15.40	15.82	16.32	17.48	11.14	11.63	12.05	12.55	13.71
	6H	15.49	15.89	16.42	16.85	18.01	11.67	12.07	12.60	13.03	14.19
	8H	15.71	16.06	16.65	17.01	18.19	11.86	12.22	12.81	13.17	14.34
	12H	15.85	16.17	16.80	17.11	18.33	11.99	12.30	12.93	13.24	14.47
12H	4H	14.87	15.31	15.80	16.25	17.41	11.15	11.60	12.08	12.53	13.69
	6H	15.46	15.82	16.41	16.77	17.95	11.72	12.08	12.66	13.03	14.20
	8H	15.69	16.01	16.64	16.95	18.17	11.94	12.25	12.88	13.19	14.42