

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925238

Luminaire Tested: DFN2DIP-PN4F0-110D080US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925238
REPORT IS A COMBINATION OF REPORTS P899696 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-110D080US950-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15674.2 lumens
Efficiency: N/A
Efficacy: 91.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 172.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925238

CATALOG NUMBER: DFN2DIP-PN4F0-110D080US950-RLLFLL

Luminous Intensity Polar Plot

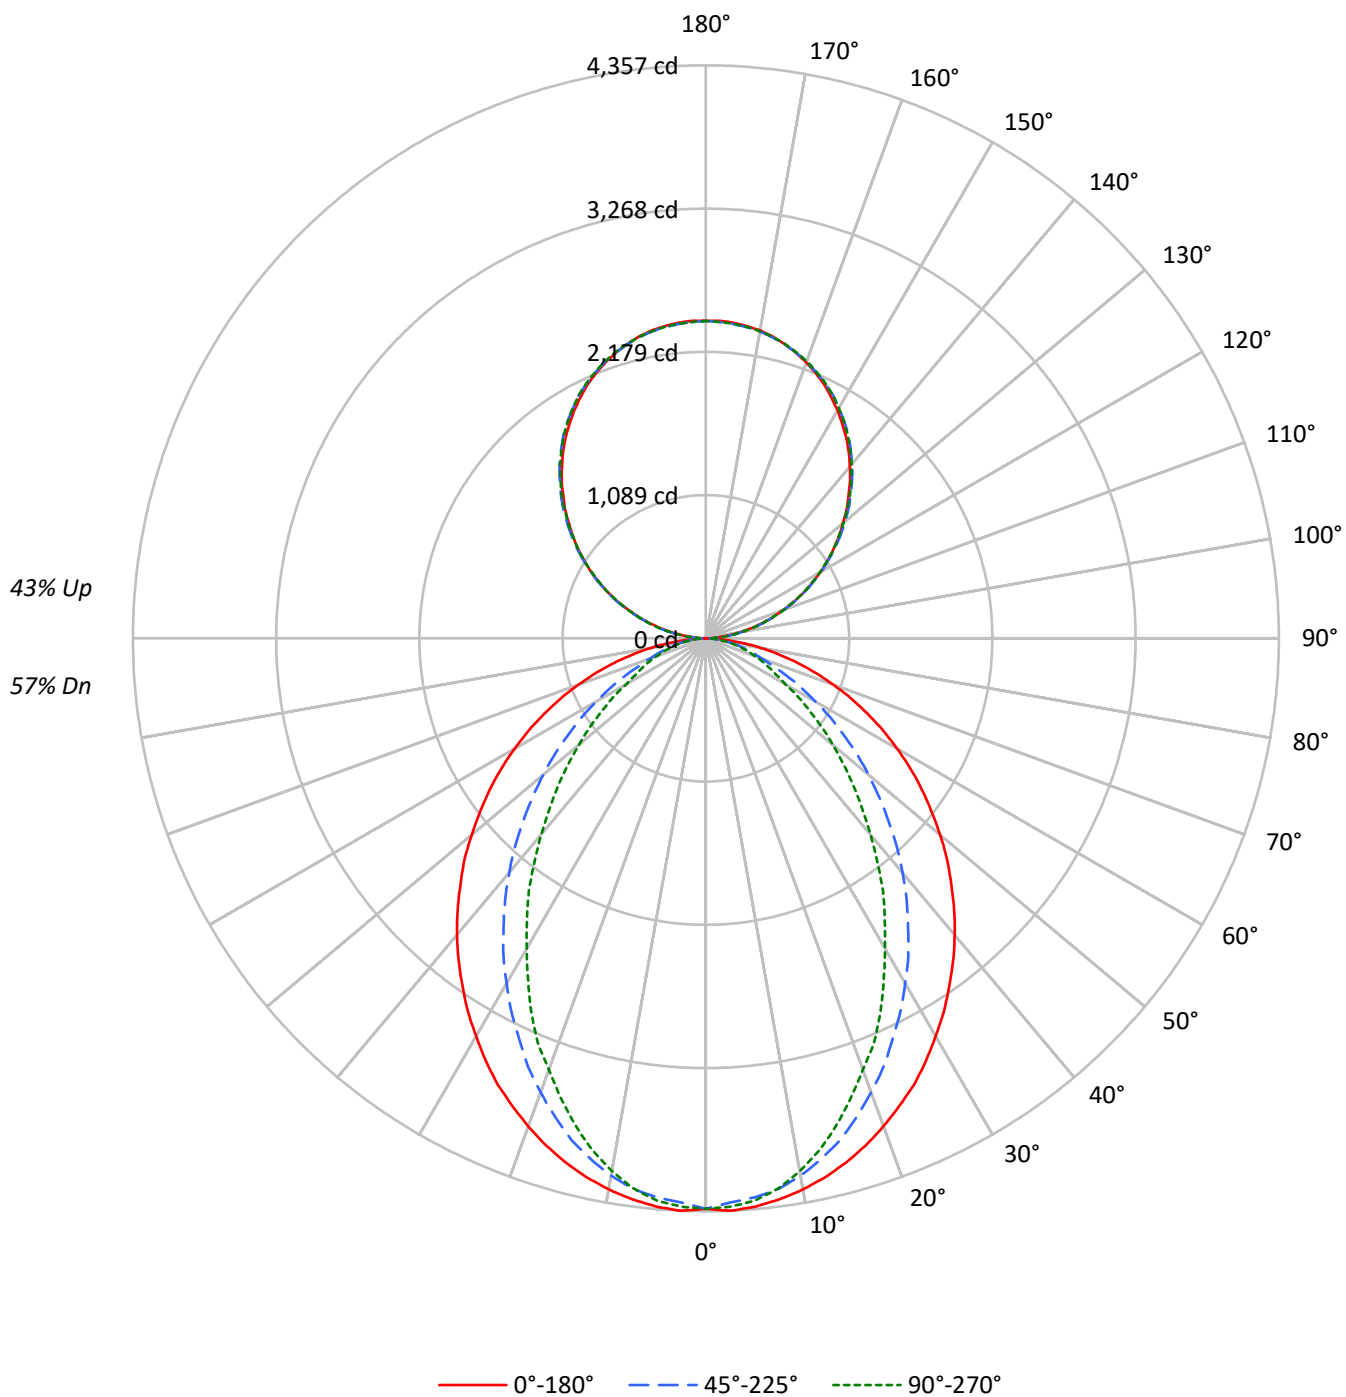

TEST NUMBER: P925238

CATALOG NUMBER: DFN2DIP-PN4F0-110D080US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	109	109	109	109	101	101	101	101	87	87	87	74	74	74	63	63	63
1	100	96	92	89	93	89	86	83	77	75	73	66	65	63	56	55	54
2	91	84	78	73	85	79	74	69	68	65	61	59	56	54	50	48	46
3	84	75	67	62	78	70	64	58	61	56	52	53	49	46	45	42	40
4	77	66	59	53	71	62	55	50	54	49	45	47	43	40	40	37	35
5	71	59	52	46	66	56	49	43	49	43	39	43	38	35	37	33	31
6	65	54	46	40	61	50	43	38	44	39	34	39	34	31	34	30	27
7	61	49	41	35	57	46	39	34	40	35	31	35	31	28	31	27	25
8	56	44	37	31	53	42	35	30	37	31	27	33	28	25	28	25	22
9	53	41	33	28	49	38	32	27	34	29	25	30	26	22	26	23	20
10	49	37	30	26	46	35	29	24	32	26	22	28	24	20	24	21	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3166	3166	3166
5°	3171	3116	3136
10°	3140	3055	3035
15°	3096	2955	2877
20°	3039	2816	2684
25°	2981	2660	2498
30°	2902	2501	2261
35°	2825	2329	2053
40°	2747	2151	1814
45°	2655	1954	1598
50°	2561	1755	1387
55°	2463	1542	1184
60°	2349	1320	975
65°	2218	1093	878
70°	2059	882	796
75°	1860	779	725
80°	1572	654	631
85°	1095	439	478

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2655 cd/sqm

TEST NUMBER: P925238

CATALOG NUMBER: DFN2DIP-PN4F0-110D080US950-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	406.5	2.6
10°-20°	1115.9	7.1
20°-30°	1566.7	10.0
30°-40°	1707.7	10.9
40°-50°	1569.6	10.0
50°-60°	1232.7	7.9
60°-70°	802.4	5.1
70°-80°	413.0	2.6
80°-90°	112.3	0.7
90°-100°	149.4	1.0
100°-110°	474.6	3.0
110°-120°	812.1	5.2
120°-130°	1068.1	6.8
130°-140°	1198.9	7.6
140°-150°	1175.6	7.5
150°-160°	986.2	6.3
160°-170°	654.0	4.2
170°-180°	228.6	1.5
0°-30°	3089.0	19.7
0°-40°	4796.8	30.6
0°-60°	7599.1	48.5
0°-90°	8926.8	57.0
90°-120°	1436.1	9.2
90°-150°	4878.6	31.1
90°-180°	6747.0	43.0
0°-180°	15674.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4337	4337	4337	4337	4337	
5°	4337	4318	4266	4302	4290	411
15°	4125	4082	3949	3874	3835	1162
25°	3744	3619	3360	3199	3140	1722
35°	3226	3026	2681	2434	2347	2019
45°	2638	2374	1963	1684	1590	2037
55°	2006	1700	1276	1040	966	1792
65°	1354	1036	683	550	538	1343
75°	722	447	314	286	283	764
85°	169	86	74	74	74	194
90°	2	26	71	67	69	15
95°	106	127	130	130	127	118
105°	438	444	448	452	452	462
115°	815	827	823	821	815	806
125°	1185	1204	1198	1191	1189	1059
135°	1533	1556	1560	1558	1552	1185
145°	1861	1876	1888	1890	1882	1163
155°	2128	2134	2141	2151	2144	980
165°	2316	2313	2313	2328	2318	653
175°	2409	2404	2399	2414	2401	229
180°	2414	2414	2414	2414	2414	

TEST NUMBER: P925238

CATALOG NUMBER: DFN2DIP-PN4F0-110D080US950-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4337.2	4337.2	4337.2	4337.2	4337.2
2.5°	4356.7	4337.2	4293.9	4333.4	4325.5
5°	4337.2	4317.6	4266.4	4301.8	4290.1
7.5°	4301.8	4278.4	4223.5	4238.9	4219.3
10°	4254.7	4227.2	4148.9	4136.8	4113.6
12.5°	4196.0	4160.6	4054.4	4031.0	3987.7
15°	4125.2	4081.9	3948.6	3874.1	3834.9
17.5°	4042.8	3979.9	3815.0	3728.7	3665.8
20°	3948.6	3869.9	3673.8	3575.9	3489.3
22.5°	3846.6	3756.2	3528.5	3395.2	3336.4
25°	3744.5	3618.8	3359.8	3199.0	3139.9
27.5°	3623.0	3489.3	3202.8	3018.3	2927.9
30°	3493.5	3344.0	3030.0	2830.0	2723.9
32.5°	3367.7	3186.9	2865.4	2629.8	2531.5
35°	3226.5	3026.2	2681.0	2433.7	2347.0
37.5°	3089.1	2873.0	2508.2	2237.0	2139.2
40°	2943.8	2708.5	2327.5	2048.8	1946.8
42.5°	2794.6	2543.6	2147.2	1856.5	1758.6
45°	2637.7	2374.5	1962.7	1683.6	1589.6
47.5°	2488.6	2210.0	1786.1	1507.0	1420.9
50°	2323.7	2045.1	1613.3	1342.2	1260.1
52.5°	2162.5	1868.1	1448.4	1189.4	1114.7
55°	2005.5	1699.5	1275.5	1040.2	965.7
57.5°	1844.8	1530.8	1122.7	902.9	839.9
60°	1679.9	1365.9	961.5	761.7	698.8
62.5°	1519.1	1205.2	824.2	635.9	604.6
65°	1354.2	1036.0	683.0	549.7	537.6
67.5°	1197.3	879.1	549.7	482.6	471.0
70°	1032.3	726.3	455.2	416.0	400.2
72.5°	875.3	584.7	380.6	349.4	341.4
75°	722.1	447.2	314.0	286.5	282.8
77.5°	569.3	317.8	247.4	231.5	223.6
80°	427.7	227.8	188.2	172.9	172.9
82.5°	298.1	153.2	129.6	121.6	121.6
85°	168.7	86.2	74.5	74.5	74.5
87.5°	62.9	31.2	31.2	27.5	27.5
90°	2.2	26.2	71.4	67.0	69.2
92.5°	45.1	61.2	63.3	65.4	65.4
95°	106.3	126.6	130.2	130.2	126.6
97.5°	176.9	195.8	203.8	203.8	203.8
100°	258.3	275.0	280.9	280.9	278.7
102.5°	344.2	356.6	364.5	366.7	364.5
105°	438.1	443.9	448.3	451.9	451.9
107.5°	531.2	540.0	540.0	541.4	531.2
110°	621.4	633.1	633.1	633.1	627.3

TEST NUMBER: P925238

CATALOG NUMBER: DFN2DIP-PN4F0-110D080US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	718.9	731.3	729.1	723.3	718.9
115°	815.0	826.6	823.0	820.8	815.0
117.5°	910.3	926.3	916.1	910.3	904.5
120°	1006.4	1022.4	1006.4	1006.4	999.8
122.5°	1093.7	1114.1	1103.9	1098.1	1093.7
125°	1185.3	1203.6	1197.7	1191.2	1189.1
127.5°	1274.9	1297.4	1289.4	1280.7	1274.9
130°	1358.6	1384.7	1381.1	1376.8	1368.8
132.5°	1452.5	1472.8	1474.3	1464.1	1458.3
135°	1533.2	1555.8	1560.2	1558.0	1552.2
137.5°	1623.4	1641.6	1645.3	1643.8	1635.1
140°	1702.8	1720.9	1731.1	1731.1	1723.1
142.5°	1784.3	1802.5	1808.3	1810.5	1802.5
145°	1861.4	1875.9	1887.6	1889.8	1881.8
147.5°	1930.5	1948.7	1957.4	1961.1	1953.1
150°	2001.9	2014.2	2022.2	2028.8	2022.2
152.5°	2065.1	2077.5	2087.7	2095.7	2087.7
155°	2128.5	2134.3	2140.9	2151.0	2144.5
157.5°	2183.0	2187.4	2191.1	2205.6	2195.4
160°	2231.8	2236.2	2238.4	2250.7	2242.0
162.5°	2276.9	2276.9	2279.1	2292.9	2282.7
165°	2315.5	2313.3	2313.3	2327.9	2317.6
167.5°	2350.4	2343.9	2343.9	2358.4	2348.2
170°	2376.6	2370.8	2368.6	2383.2	2370.8
172.5°	2394.8	2389.0	2386.8	2401.3	2389.0
175°	2409.3	2403.5	2399.1	2413.7	2401.3
177.5°	2417.3	2411.5	2407.1	2419.5	2407.1
180°	2413.7	2413.7	2413.7	2413.7	2413.7

TEST NUMBER: P925238

CATALOG NUMBER: DFN2DIP-PN4F0-110D080US950-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.78	12.67	12.68	13.59	14.76	7.75	8.64	8.65	9.56	10.73
	3H	13.47	14.26	14.38	15.19	16.39	8.94	9.74	9.86	10.66	11.86
	4H	14.08	14.83	15.01	15.76	16.97	9.40	10.15	10.32	11.08	12.28
	6H	14.51	15.20	15.45	16.14	17.36	9.72	10.41	10.66	11.35	12.57
	8H	14.64	15.30	15.59	16.25	17.47	9.81	10.47	10.76	11.43	12.64
	12H	14.70	15.33	15.66	16.28	17.52	9.86	10.49	10.81	11.43	12.67
4H	2H	11.81	12.56	12.74	13.49	14.70	8.35	9.10	9.29	10.04	11.24
	3H	13.65	14.27	14.59	15.23	16.45	9.71	10.33	10.65	11.30	12.52
	4H	14.34	14.91	15.30	15.87	17.11	10.26	10.83	11.21	11.79	13.03
	6H	14.86	15.35	15.83	16.33	17.58	10.68	11.17	11.65	12.15	13.40
	8H	15.04	15.50	16.01	16.47	17.73	10.81	11.27	11.78	12.25	13.50
	12H	15.14	15.55	16.13	16.54	17.81	10.88	11.29	11.87	12.29	13.55
8H	4H	14.32	14.77	15.28	15.75	17.00	10.55	11.00	11.52	11.98	13.24
	6H	14.89	15.26	15.88	16.28	17.54	11.07	11.45	12.06	12.46	13.72
	8H	15.11	15.44	16.11	16.44	17.72	11.26	11.59	12.26	12.60	13.87
	12H	15.25	15.54	16.25	16.54	17.86	11.38	11.68	12.39	12.67	14.00
12H	4H	14.27	14.68	15.26	15.67	16.94	10.55	10.97	11.54	11.96	13.22
	6H	14.86	15.20	15.87	16.20	17.48	11.12	11.45	12.12	12.46	13.73
	8H	15.09	15.38	16.09	16.38	17.70	11.33	11.63	12.34	12.62	13.95

END OF REPORT