

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925244

Luminaire Tested: DFN2DIP-PN4F0-110D100US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925244
REPORT IS A COMBINATION OF REPORTS P899731 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-110D100US950-FLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18832.0 lumens
Efficiency: N/A
Efficacy: 99.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 189.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925244

CATALOG NUMBER: DFN2DIP-PN4F0-110D100US950-FLLFLL

Luminous Intensity Polar Plot

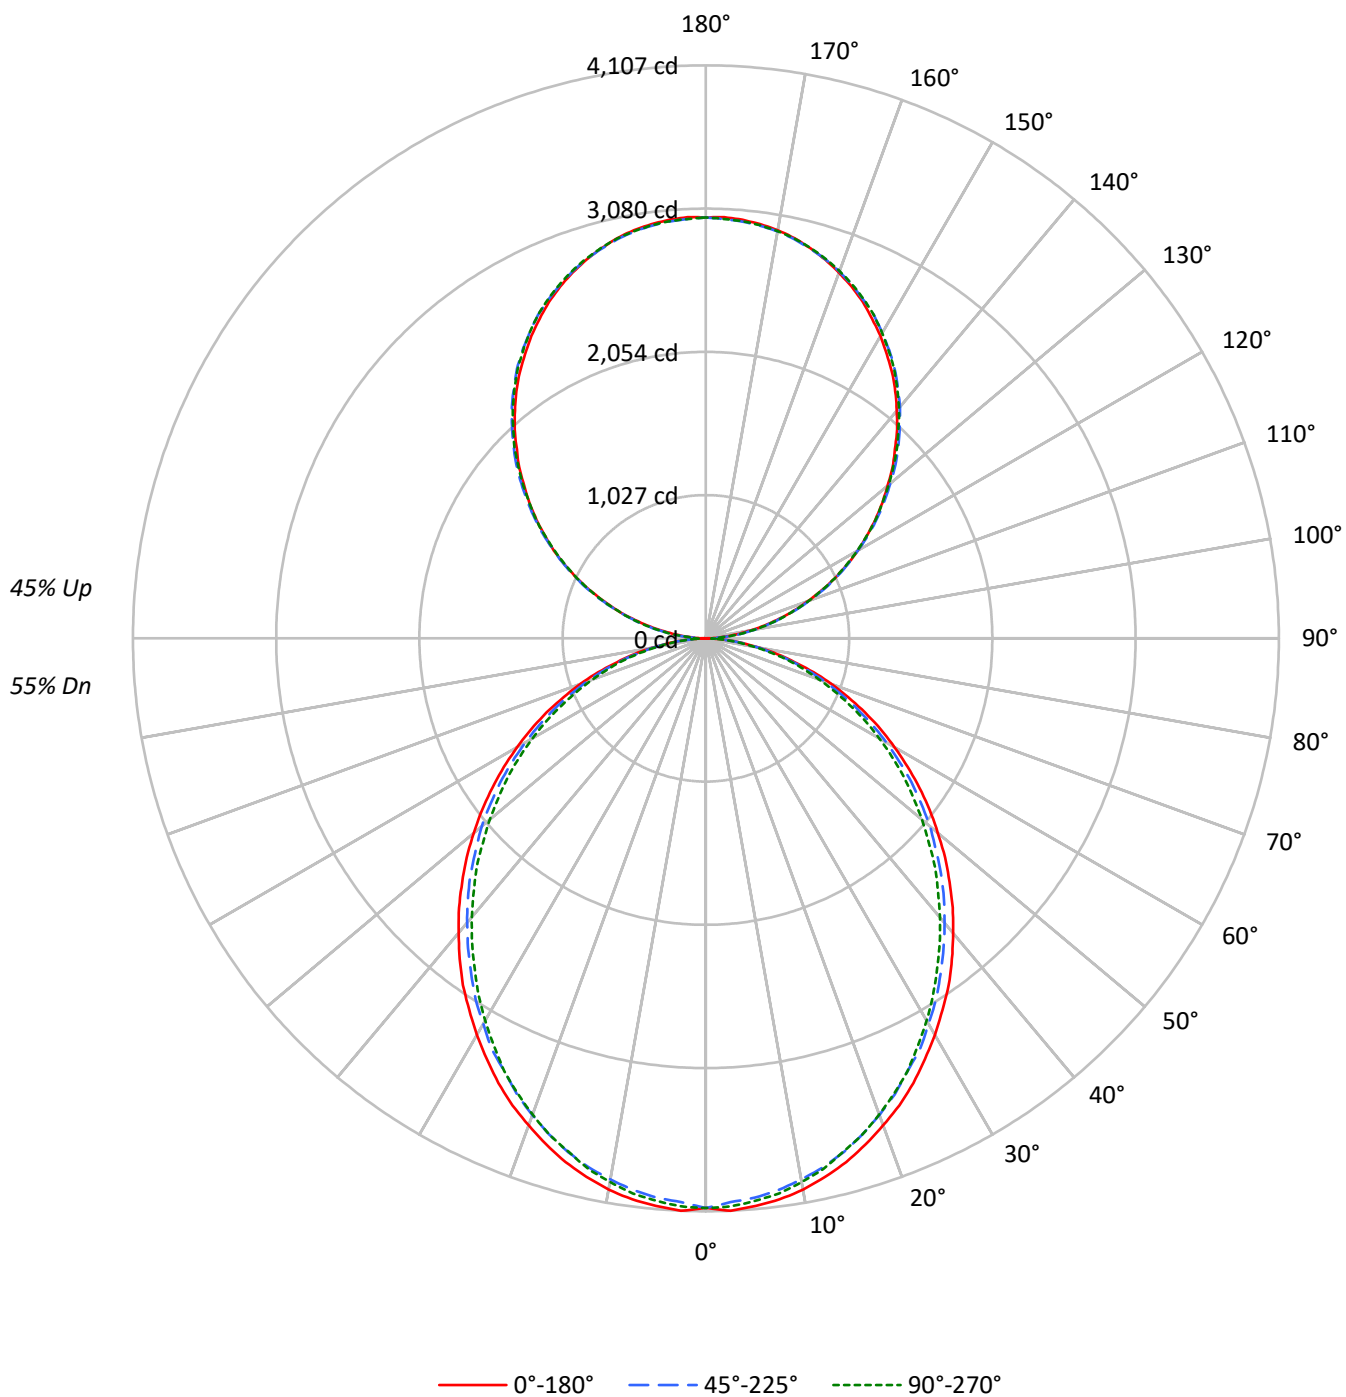

TEST NUMBER: P925244

CATALOG NUMBER: DFN2DIP-PN4F0-110D100US950-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	101	101	101	101	86	86	86	73	73	73	61	61	61
1	99	95	91	87	92	88	85	82	76	73	71	64	63	61	54	53	51
2	90	83	76	71	83	77	72	67	66	62	59	56	53	51	47	45	43
3	82	73	65	59	76	68	61	56	58	53	49	50	46	43	42	39	37
4	75	64	56	50	70	60	53	47	52	46	42	45	40	37	38	34	32
5	69	57	49	43	64	54	46	41	47	41	36	40	36	32	34	30	28
6	64	51	43	37	59	48	41	36	42	36	32	36	32	28	31	27	24
7	59	47	38	33	55	44	36	31	38	32	28	33	28	25	28	24	22
8	55	42	34	29	51	40	33	28	35	29	25	30	26	22	26	22	19
9	51	39	31	26	47	36	29	25	32	26	22	28	23	20	24	20	18
10	48	35	28	23	44	33	27	22	29	24	20	26	21	18	22	19	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2981	2981	2981
5°	2985	2939	2959
10°	2961	2900	2920
15°	2918	2853	2858
20°	2859	2787	2794
25°	2800	2708	2721
30°	2727	2635	2627
35°	2657	2548	2528
40°	2572	2460	2434
45°	2487	2373	2337
50°	2393	2281	2226
55°	2296	2174	2123
60°	2185	2048	2005
65°	2065	1917	1867
70°	1911	1758	1718
75°	1699	1567	1581
80°	1444	1324	1319
85°	1044	903	882

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 2487 cd/sqm

TEST NUMBER: P925244

CATALOG NUMBER: DFN2DIP-PN4F0-110D100US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	384.3	2.0
10°-20°	1081.3	5.7
20°-30°	1589.1	8.4
30°-40°	1845.7	9.8
40°-50°	1843.4	9.8
50°-60°	1607.4	8.5
60°-70°	1188.2	6.3
70°-80°	672.3	3.6
80°-90°	186.0	1.0
90°-100°	186.7	1.0
100°-110°	593.2	3.2
110°-120°	1015.2	5.4
120°-130°	1335.1	7.1
130°-140°	1498.6	8.0
140°-150°	1469.5	7.8
150°-160°	1232.7	6.5
160°-170°	817.5	4.3
170°-180°	285.7	1.5
0°-30°	3054.8	16.2
0°-40°	4900.4	26.0
0°-60°	8351.2	44.3
0°-90°	10397.7	55.2
90°-120°	1795.1	9.5
90°-150°	6098.3	32.4
90°-180°	8434.0	44.8
0°-180°	18832.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4083	4083	4083	4083	4083	
5°	4083	4068	4024	4056	4048	388
15°	3887	3864	3812	3828	3809	1095
25°	3518	3487	3420	3428	3420	1619
35°	3035	2996	2933	2909	2890	1895
45°	2470	2442	2383	2340	2324	1906
55°	1869	1845	1798	1751	1732	1671
65°	1260	1237	1198	1162	1143	1246
75°	659	652	632	609	617	704
85°	161	157	153	141	138	179
90°	3	33	89	84	86	18
95°	133	158	163	163	158	148
105°	548	555	560	565	565	578
115°	1019	1033	1029	1026	1019	1008
125°	1482	1504	1497	1489	1486	1324
135°	1916	1945	1950	1948	1940	1481
145°	2327	2345	2360	2362	2352	1454
155°	2661	2668	2676	2689	2680	1225
165°	2894	2892	2892	2910	2897	817
175°	3012	3004	2999	3017	3002	286
180°	3017	3017	3017	3017	3017	



TEST NUMBER: P925244

CATALOG NUMBER: DFN2DIP-PN4F0-110D100US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4083.3	4083.3	4083.3	4083.3	4083.3
2.5°	4107.0	4087.4	4044.1	4083.3	4075.8
5°	4083.3	4067.9	4024.5	4055.7	4048.3
7.5°	4055.7	4032.5	3989.2	4020.8	4012.9
10°	4012.9	3985.3	3938.3	3969.5	3957.9
12.5°	3953.8	3930.4	3883.4	3902.9	3895.0
15°	3887.1	3863.7	3812.5	3828.3	3808.7
17.5°	3804.6	3781.3	3730.0	3749.6	3730.0
20°	3714.2	3690.8	3635.9	3647.5	3632.2
22.5°	3624.2	3588.8	3537.5	3537.5	3529.6
25°	3518.0	3486.8	3420.1	3427.6	3420.1
27.5°	3400.1	3372.6	3321.7	3310.1	3290.5
30°	3282.6	3250.9	3192.2	3180.5	3164.7
32.5°	3156.8	3133.5	3070.5	3046.8	3031.0
35°	3035.2	2996.0	2933.1	2909.3	2889.8
37.5°	2897.7	2862.3	2799.4	2771.8	2752.3
40°	2756.5	2724.8	2661.9	2626.9	2611.1
42.5°	2619.0	2587.3	2524.9	2485.3	2462.0
45°	2469.9	2442.3	2383.2	2340.4	2324.5
47.5°	2324.5	2297.0	2234.1	2190.8	2167.4
50°	2171.2	2151.7	2096.6	2041.7	2022.1
52.5°	2022.1	1994.5	1943.8	1900.4	1872.9
55°	1869.2	1845.4	1798.4	1751.3	1731.7
57.5°	1715.9	1696.3	1645.1	1597.9	1582.1
60°	1562.6	1547.2	1492.2	1448.8	1437.2
62.5°	1413.4	1386.0	1346.8	1307.6	1291.8
65°	1260.5	1236.8	1197.7	1162.3	1142.7
67.5°	1103.5	1083.6	1048.5	1021.1	1005.2
70°	958.1	942.3	906.9	879.4	863.9
72.5°	809.0	793.2	773.6	746.1	734.4
75°	659.4	652.0	631.9	608.7	616.6
77.5°	526.1	510.3	502.4	490.7	479.1
80°	392.9	388.7	380.7	369.1	361.2
82.5°	267.0	267.0	263.3	247.5	247.5
85°	160.8	157.0	153.3	141.2	137.5
87.5°	70.8	62.9	55.0	43.3	39.1
90°	2.8	32.7	89.1	83.7	86.4
92.5°	56.4	76.4	79.2	81.9	81.9
95°	132.8	158.3	162.8	162.8	158.3
97.5°	221.0	244.7	254.7	254.7	254.7
100°	322.9	343.8	351.1	351.1	348.4
102.5°	430.3	445.7	455.7	458.4	455.7
105°	547.6	554.8	560.3	564.9	564.9
107.5°	664.0	675.0	675.0	676.8	664.0
110°	776.8	791.3	791.3	791.3	784.1

TEST NUMBER: P925244

CATALOG NUMBER: DFN2DIP-PN4F0-110D100US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	898.7	914.1	911.5	904.1	898.7
115°	1018.8	1033.3	1028.8	1026.0	1018.8
117.5°	1137.9	1158.0	1145.2	1137.9	1130.6
120°	1257.9	1278.0	1257.9	1257.9	1249.8
122.5°	1367.1	1392.6	1379.9	1372.6	1367.1
125°	1481.8	1504.5	1497.2	1489.0	1486.3
127.5°	1593.7	1621.8	1611.8	1600.9	1593.7
130°	1698.2	1730.9	1726.5	1720.9	1711.0
132.5°	1815.6	1841.0	1842.8	1830.2	1822.8
135°	1916.5	1944.7	1950.2	1947.5	1940.1
137.5°	2029.3	2052.1	2056.6	2054.8	2043.8
140°	2128.5	2151.2	2164.0	2164.0	2153.9
142.5°	2230.4	2253.1	2260.3	2263.1	2253.1
145°	2326.7	2344.9	2359.5	2362.2	2352.2
147.5°	2413.1	2435.9	2446.8	2451.4	2441.4
150°	2502.3	2517.8	2527.8	2535.9	2527.8
152.5°	2581.4	2596.9	2609.7	2619.7	2609.7
155°	2660.6	2667.9	2676.1	2688.8	2680.5
157.5°	2728.8	2734.3	2738.8	2757.0	2744.3
160°	2789.8	2795.2	2797.9	2813.3	2802.5
162.5°	2846.2	2846.2	2848.8	2866.1	2853.4
165°	2894.3	2891.6	2891.6	2909.8	2897.1
167.5°	2938.0	2929.8	2929.8	2948.1	2935.3
170°	2970.8	2963.5	2960.7	2979.0	2963.5
172.5°	2993.5	2986.2	2983.4	3001.7	2986.2
175°	3011.7	3004.4	2999.0	3017.1	3001.7
177.5°	3021.7	3014.4	3008.9	3024.4	3008.9
180°	3017.1	3017.1	3017.1	3017.1	3017.1

TEST NUMBER: P925244

CATALOG NUMBER: DFN2DIP-PN4F0-110D100US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.54	12.45	12.45	13.38	14.58	11.10	12.01	12.01	12.94	14.14
	3H	13.21	14.02	14.13	14.96	16.18	12.72	13.54	13.65	14.48	15.70
	4H	13.80	14.57	14.74	15.52	16.74	13.31	14.08	14.25	15.03	16.26
	6H	14.20	14.92	15.15	15.87	17.11	13.71	14.42	14.66	15.37	16.62
	8H	14.31	14.99	15.27	15.96	17.20	13.82	14.50	14.77	15.46	16.70
	12H	14.36	15.01	15.32	15.97	17.23	13.86	14.51	14.82	15.47	16.73
4H	2H	12.01	12.78	12.95	13.72	14.95	11.66	12.43	12.60	13.37	14.60
	3H	13.88	14.53	14.83	15.50	16.74	13.48	14.12	14.43	15.10	16.34
	4H	14.60	15.19	15.56	16.16	17.43	14.18	14.77	15.15	15.74	17.01
	6H	15.12	15.63	16.10	16.62	17.89	14.70	15.20	15.67	16.20	17.46
	8H	15.27	15.75	16.25	16.73	18.01	14.84	15.32	15.82	16.30	17.59
	12H	15.35	15.78	16.35	16.78	18.07	14.91	15.34	15.91	16.34	17.63
8H	4H	14.80	15.28	15.78	16.26	17.54	14.43	14.90	15.41	15.89	17.17
	6H	15.44	15.83	16.44	16.86	18.14	15.06	15.45	16.06	16.48	17.76
	8H	15.66	16.01	16.67	17.02	18.32	15.28	15.62	16.29	16.64	17.94
	12H	15.80	16.10	16.81	17.11	18.45	15.39	15.70	16.41	16.71	18.05
12H	4H	14.79	15.22	15.79	16.22	17.51	14.43	14.85	15.42	15.86	17.14
	6H	15.47	15.82	16.48	16.83	18.13	15.10	15.45	16.11	16.47	17.76
	8H	15.71	16.02	16.73	17.03	18.37	15.34	15.65	16.36	16.66	18.00