

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925282

Luminaire Tested: DFN2DIP-PN4F0-120D100US950-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925282
REPORT IS A COMBINATION OF REPORTS P899734 AND P896497
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-PN4F0-120D100US950-RLLFLL
Description: 4 foot, Pentagon Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 18173.7 lumens
Efficiency: N/A
Efficacy: 90.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.74' x L: 3.94' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 201.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925282
CATALOG NUMBER: DFN2DIP-PN4F0-120D100US950-RLLFLL

Luminous Intensity Polar Plot

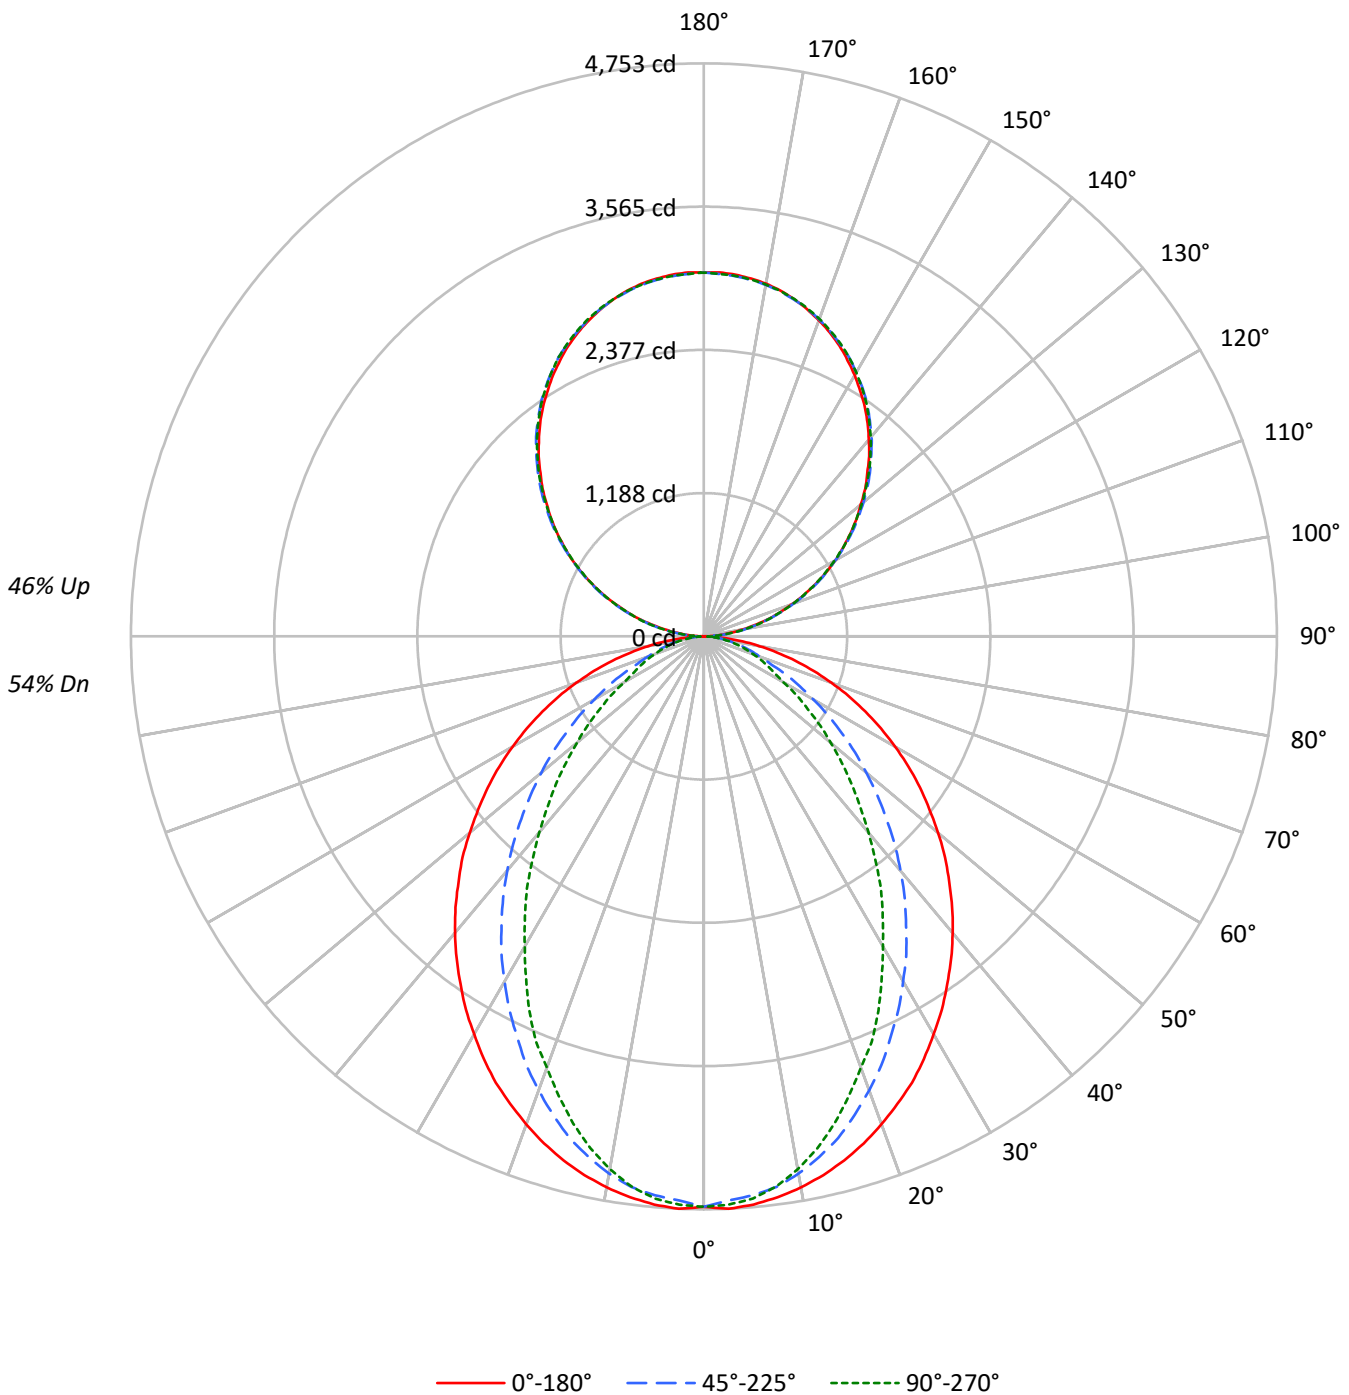



TEST NUMBER: P925282
 CATALOG NUMBER: DFN2DIP-PN4F0-120D100US950-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59	59	59	59	54
1	99	95	91	88	92	88	85	82	76	73	71	64	62	61	53	52	51	53	52	51	46
2	91	84	78	73	84	78	73	68	67	63	60	57	54	52	48	46	44	48	46	44	39
3	83	74	67	61	77	69	63	58	59	55	51	51	47	44	43	40	38	43	40	38	34
4	76	66	58	52	71	61	55	49	53	48	44	46	42	38	38	36	33	38	36	33	30
5	70	59	51	45	65	55	48	43	48	42	38	41	37	34	35	32	29	35	32	29	26
6	65	53	45	39	60	50	43	37	43	38	34	37	33	30	32	29	26	32	29	26	23
7	60	48	40	35	56	45	38	33	39	34	30	34	30	27	29	26	23	29	26	23	21
8	56	44	36	31	52	41	34	30	36	31	27	31	27	24	27	24	21	27	24	21	19
9	52	40	33	28	48	38	31	27	33	28	24	29	25	22	25	22	19	25	22	19	17
10	49	37	30	25	45	35	28	24	31	25	22	27	23	20	23	20	18	23	20	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3454	3454	3454
5°	3459	3399	3421
10°	3425	3333	3311
15°	3378	3223	3139
20°	3316	3072	2928
25°	3252	2902	2725
30°	3166	2728	2467
35°	3082	2541	2240
40°	2996	2347	1979
45°	2897	2132	1743
50°	2794	1915	1513
55°	2687	1682	1291
60°	2563	1439	1064
65°	2420	1193	958
70°	2247	962	868
75°	2029	849	791
80°	1714	714	688
85°	1194	479	522

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 2897 cd/sqm



TEST NUMBER: P925282

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US950-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	443.4	2.4
10°-20°	1217.3	6.7
20°-30°	1709.1	9.4
30°-40°	1863.0	10.3
40°-50°	1712.3	9.4
50°-60°	1344.7	7.4
60°-70°	875.3	4.8
70°-80°	450.6	2.5
80°-90°	123.6	0.7
90°-100°	186.7	1.0
100°-110°	593.2	3.3
110°-120°	1015.2	5.6
120°-130°	1335.1	7.3
130°-140°	1498.6	8.2
140°-150°	1469.5	8.1
150°-160°	1232.7	6.8
160°-170°	817.5	4.5
170°-180°	285.7	1.6
0°-30°	3369.8	18.5
0°-40°	5232.8	28.8
0°-60°	8289.9	45.6
0°-90°	9739.4	53.6
90°-120°	1795.1	9.9
90°-150°	6098.3	33.6
90°-180°	8434.0	46.4
0°-180°	18173.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4732	4732	4732	4732	4732	
5°	4732	4710	4654	4693	4680	449
15°	4500	4453	4308	4226	4184	1268
25°	4085	3948	3665	3490	3425	1879
35°	3520	3301	2925	2655	2560	2203
45°	2878	2590	2141	1837	1734	2222
55°	2188	1854	1392	1135	1054	1955
65°	1477	1130	745	600	586	1465
75°	788	488	343	312	308	833
85°	184	94	81	81	81	211
90°	3	33	89	84	86	18
95°	133	158	163	163	158	148
105°	548	555	560	565	565	578
115°	1019	1033	1029	1026	1019	1008
125°	1482	1504	1497	1489	1486	1324
135°	1916	1945	1950	1948	1940	1481
145°	2327	2345	2360	2362	2352	1454
155°	2661	2668	2676	2689	2680	1225
165°	2894	2892	2892	2910	2897	817
175°	3012	3004	2999	3017	3002	286
180°	3017	3017	3017	3017	3017	



TEST NUMBER: P925282

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US950-RLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4731.5	4731.5	4731.5	4731.5	4731.5
2.5°	4752.8	4731.5	4684.2	4727.4	4718.7
5°	4731.5	4710.1	4654.2	4692.8	4680.1
7.5°	4692.8	4667.3	4607.4	4624.2	4602.9
10°	4641.5	4611.5	4526.1	4512.9	4487.5
12.5°	4577.4	4538.8	4422.9	4397.6	4350.3
15°	4500.2	4453.0	4307.6	4226.2	4183.6
17.5°	4410.2	4341.7	4161.7	4067.8	3999.2
20°	4307.6	4221.7	4007.8	3901.0	3806.5
22.5°	4196.3	4097.7	3849.2	3703.8	3639.8
25°	4085.0	3947.7	3665.2	3489.8	3425.3
27.5°	3952.3	3806.5	3493.9	3292.7	3194.1
30°	3811.0	3648.0	3305.4	3087.3	2971.5
32.5°	3673.9	3476.7	3126.0	2868.9	2761.6
35°	3519.9	3301.3	2924.7	2654.9	2560.3
37.5°	3369.9	3134.2	2736.2	2440.4	2333.7
40°	3211.4	2954.7	2539.1	2235.1	2123.8
42.5°	3048.7	2774.8	2342.4	2025.2	1918.5
45°	2877.5	2590.4	2141.1	1836.7	1734.0
47.5°	2714.8	2410.9	1948.4	1644.1	1550.1
50°	2535.0	2231.0	1759.9	1464.2	1374.7
52.5°	2359.1	2037.9	1580.0	1297.4	1216.2
55°	2187.9	1854.0	1391.5	1134.8	1053.5
57.5°	2012.5	1670.0	1224.7	984.9	916.3
60°	1832.6	1490.1	1048.9	830.9	762.3
62.5°	1657.3	1314.7	899.0	693.7	659.6
65°	1477.4	1130.3	745.1	599.7	586.5
67.5°	1306.1	959.0	599.7	526.5	513.8
70°	1126.2	792.3	496.6	453.8	436.6
72.5°	955.0	637.8	415.2	381.1	372.5
75°	787.7	487.9	342.6	312.5	308.4
77.5°	621.1	346.6	269.9	252.6	243.9
80°	466.6	248.5	205.3	188.5	188.5
82.5°	325.3	167.1	141.3	132.6	132.6
85°	184.0	94.1	81.3	81.3	81.3
87.5°	68.6	34.1	34.1	30.0	30.0
90°	2.8	32.7	89.1	83.7	86.4
92.5°	56.4	76.4	79.2	81.9	81.9
95°	132.8	158.3	162.8	162.8	158.3
97.5°	221.0	244.7	254.7	254.7	254.7
100°	322.9	343.8	351.1	351.1	348.4
102.5°	430.3	445.7	455.7	458.4	455.7
105°	547.6	554.8	560.3	564.9	564.9
107.5°	664.0	675.0	675.0	676.8	664.0
110°	776.8	791.3	791.3	791.3	784.1



TEST NUMBER: P925282

CATALOG NUMBER: DFN2DIP-PN4F0-120D100US950-RLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	898.7	914.1	911.5	904.1	898.7
115°	1018.8	1033.3	1028.8	1026.0	1018.8
117.5°	1137.9	1158.0	1145.2	1137.9	1130.6
120°	1257.9	1278.0	1257.9	1257.9	1249.8
122.5°	1367.1	1392.6	1379.9	1372.6	1367.1
125°	1481.8	1504.5	1497.2	1489.0	1486.3
127.5°	1593.7	1621.8	1611.8	1600.9	1593.7
130°	1698.2	1730.9	1726.5	1720.9	1711.0
132.5°	1815.6	1841.0	1842.8	1830.2	1822.8
135°	1916.5	1944.7	1950.2	1947.5	1940.1
137.5°	2029.3	2052.1	2056.6	2054.8	2043.8
140°	2128.5	2151.2	2164.0	2164.0	2153.9
142.5°	2230.4	2253.1	2260.3	2263.1	2253.1
145°	2326.7	2344.9	2359.5	2362.2	2352.2
147.5°	2413.1	2435.9	2446.8	2451.4	2441.4
150°	2502.3	2517.8	2527.8	2535.9	2527.8
152.5°	2581.4	2596.9	2609.7	2619.7	2609.7
155°	2660.6	2667.9	2676.1	2688.8	2680.5
157.5°	2728.8	2734.3	2738.8	2757.0	2744.3
160°	2789.8	2795.2	2797.9	2813.3	2802.5
162.5°	2846.2	2846.2	2848.8	2866.1	2853.4
165°	2894.3	2891.6	2891.6	2909.8	2897.1
167.5°	2938.0	2929.8	2929.8	2948.1	2935.3
170°	2970.8	2963.5	2960.7	2979.0	2963.5
172.5°	2993.5	2986.2	2983.4	3001.7	2986.2
175°	3011.7	3004.4	2999.0	3017.1	3001.7
177.5°	3021.7	3014.4	3008.9	3024.4	3008.9
180°	3017.1	3017.1	3017.1	3017.1	3017.1



TEST NUMBER: P925282
 CATALOG NUMBER: DFN2DIP-PN4F0-120D100US950-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.79	12.65	12.72	13.59	14.82	7.75	8.61	8.69	9.56	10.78
	3H	13.47	14.24	14.42	15.20	16.44	8.95	9.71	9.89	10.67	11.91
	4H	14.08	14.81	15.04	15.77	17.02	9.40	10.12	10.36	11.08	12.34
	6H	14.51	15.18	15.48	16.14	17.41	9.72	10.39	10.69	11.35	12.62
	8H	14.64	15.27	15.61	16.26	17.52	9.81	10.45	10.79	11.43	12.69
	12H	14.70	15.31	15.68	16.28	17.57	9.86	10.46	10.84	11.44	12.73
4H	2H	11.81	12.54	12.78	13.50	14.75	8.35	9.08	9.32	10.04	11.29
	3H	13.65	14.25	14.62	15.24	16.51	9.71	10.31	10.68	11.30	12.57
	4H	14.34	14.89	15.32	15.88	17.17	10.26	10.81	11.24	11.79	13.08
	6H	14.86	15.33	15.86	16.34	17.63	10.68	11.15	11.67	12.16	13.45
	8H	15.04	15.48	16.03	16.48	17.79	10.81	11.25	11.81	12.25	13.56
	12H	15.14	15.54	16.15	16.55	17.86	10.88	11.28	11.89	12.29	13.60
8H	4H	14.31	14.75	15.31	15.75	17.06	10.54	10.98	11.54	11.98	13.29
	6H	14.88	15.25	15.90	16.29	17.59	11.06	11.43	12.08	12.47	13.77
	8H	15.10	15.42	16.13	16.45	17.77	11.25	11.58	12.28	12.60	13.93
	12H	15.24	15.53	16.27	16.55	17.91	11.38	11.66	12.41	12.68	14.05
12H	4H	14.26	14.66	15.28	15.68	16.99	10.55	10.95	11.56	11.96	13.27
	6H	14.86	15.18	15.89	16.21	17.53	11.11	11.43	12.14	12.46	13.78
	8H	15.08	15.36	16.11	16.39	17.75	11.33	11.61	12.36	12.63	14.00