

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903572

Luminaire Tested: DFN2DIP-SQ2F0-070D050US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903572
REPORT IS A COMBINATION OF REPORTS P899803 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-070D050US830-FLLFLL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10702.6 lumens
Efficiency: N/A
Efficacy: 101.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 105.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903572

CATALOG NUMBER: DFN2DIP-SQ2F0-070D050US830-FLLFLL

Luminous Intensity Polar Plot

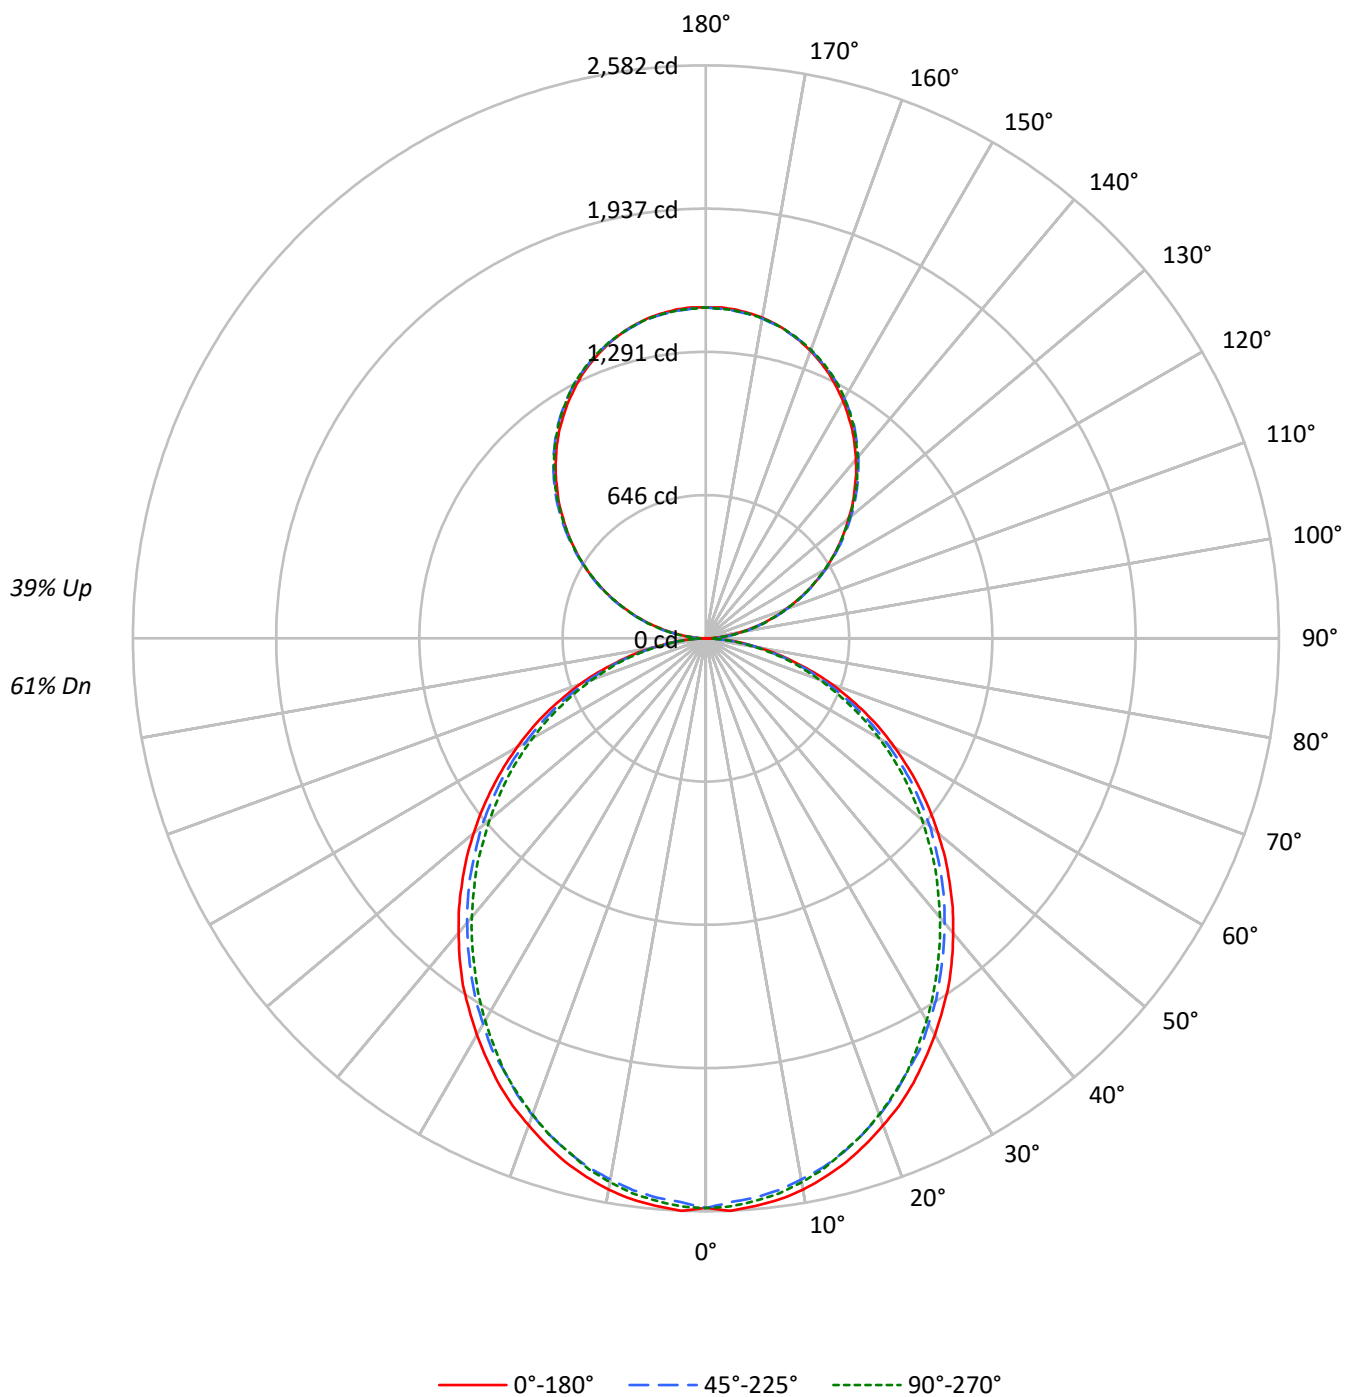

TEST NUMBER: P903572

CATALOG NUMBER: DFN2DIP-SQ2F0-070D050US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	100	96	92	88	94	90	86	83	79	76	74	68	66	65	59	57	56
2	91	84	77	72	85	79	73	68	69	65	61	60	57	54	52	49	47
3	83	74	66	60	78	69	63	57	61	56	51	53	49	46	46	43	40
4	76	65	57	51	71	61	54	49	54	48	44	47	43	39	41	37	35
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30
6	65	52	44	38	60	49	42	36	44	38	33	38	34	30	33	30	27
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	31	27	24
8	56	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21
9	52	39	32	27	48	37	30	25	33	27	23	30	25	21	26	22	19
10	48	36	29	24	45	34	28	23	31	25	21	27	23	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5645	5645	5645
5°	5644	5554	5596
10°	5589	5467	5512
15°	5497	5365	5386
20°	5376	5227	5257
25°	5256	5066	5109
30°	5107	4915	4923
35°	4965	4738	4727
40°	4793	4559	4540
45°	4620	4380	4348
50°	4431	4190	4127
55°	4232	3972	3921
60°	4007	3715	3685
65°	3760	3446	3408
70°	3445	3118	3107
75°	3014	2725	2818
80°	2489	2225	2289
85°	1682	1405	1437

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4620 cd/sqm

TEST NUMBER: P903572

CATALOG NUMBER: DFN2DIP-SQ2F0-070D050US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.6	2.3
10°-20°	679.9	6.4
20°-30°	999.1	9.3
30°-40°	1160.4	10.8
40°-50°	1159.0	10.8
50°-60°	1010.6	9.4
60°-70°	747.1	7.0
70°-80°	422.7	3.9
80°-90°	115.8	1.1
90°-100°	92.2	0.9
100°-110°	293.0	2.7
110°-120°	501.5	4.7
120°-130°	659.5	6.2
130°-140°	740.3	6.9
140°-150°	725.9	6.8
150°-160°	609.0	5.7
160°-170°	403.9	3.8
170°-180°	141.2	1.3
0°-30°	1920.6	17.9
0°-40°	3081.0	28.8
0°-60°	5250.6	49.1
0°-90°	6536.1	61.1
90°-120°	886.7	8.3
90°-150°	3012.5	28.1
90°-180°	4167.0	38.9
0°-180°	10702.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2567	2567	2567	2567	2567	
5°	2567	2558	2530	2550	2545	244
15°	2444	2429	2397	2407	2395	688
25°	2212	2192	2150	2155	2150	1018
35°	1908	1884	1844	1829	1817	1192
45°	1553	1536	1498	1471	1461	1198
55°	1175	1160	1131	1101	1089	1051
65°	793	778	753	731	718	784
75°	415	410	397	383	388	443
85°	101	99	96	89	86	113
90°	1	16	44	41	43	10
95°	66	78	80	80	78	73
105°	270	274	277	279	279	285
115°	503	510	508	507	503	498
125°	732	743	740	736	734	654
135°	947	961	963	962	958	732
145°	1149	1158	1166	1167	1162	718
155°	1314	1318	1322	1328	1324	605
165°	1430	1428	1428	1438	1431	403
175°	1488	1484	1482	1490	1483	141
180°	1490	1490	1490	1490	1490	

TEST NUMBER: P903572

CATALOG NUMBER: DFN2DIP-SQ2F0-070D050US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2567.2	2567.2	2567.2	2567.2	2567.2
2.5°	2582.2	2569.8	2542.6	2567.2	2562.5
5°	2567.2	2557.6	2530.3	2550.0	2545.2
7.5°	2550.0	2535.3	2508.0	2528.0	2523.0
10°	2523.0	2505.7	2476.1	2495.8	2488.4
12.5°	2485.8	2471.2	2441.6	2453.8	2448.8
15°	2443.9	2429.2	2397.0	2407.0	2394.6
17.5°	2392.0	2377.4	2345.1	2357.5	2345.1
20°	2335.1	2320.5	2285.9	2293.3	2283.6
22.5°	2278.6	2256.4	2224.1	2224.1	2219.1
25°	2211.9	2192.2	2150.3	2155.0	2150.3
27.5°	2137.7	2120.4	2088.5	2081.1	2068.8
30°	2063.9	2043.9	2007.0	1999.7	1989.7
32.5°	1984.7	1970.1	1930.5	1915.6	1905.6
35°	1908.3	1883.7	1844.1	1829.2	1816.8
37.5°	1821.8	1799.6	1760.0	1742.8	1730.4
40°	1733.1	1713.2	1673.6	1651.6	1641.6
42.5°	1646.6	1626.7	1587.4	1562.5	1547.8
45°	1552.8	1535.6	1498.4	1471.4	1461.4
47.5°	1461.4	1444.2	1404.6	1377.3	1362.7
50°	1365.1	1352.7	1318.1	1283.6	1271.3
52.5°	1271.3	1254.1	1222.1	1194.9	1177.5
55°	1175.2	1160.3	1130.7	1101.1	1088.7
57.5°	1078.8	1066.5	1034.3	1004.7	994.8
60°	982.4	972.7	938.2	911.0	903.6
62.5°	888.6	871.4	846.8	822.2	812.2
65°	792.6	777.6	753.0	730.8	718.4
67.5°	693.8	681.3	659.2	642.0	632.0
70°	602.4	592.5	570.1	552.9	543.2
72.5°	508.6	498.7	486.4	469.1	461.8
75°	414.6	409.9	397.3	382.7	387.7
77.5°	330.8	320.8	315.8	308.5	301.2
80°	246.9	244.4	239.4	232.1	227.1
82.5°	167.9	167.9	165.5	155.6	155.6
85°	101.1	98.8	96.4	88.8	86.4
87.5°	44.5	39.6	34.6	27.2	24.6
90°	1.3	16.2	44.0	41.4	42.7
92.5°	27.9	37.7	39.1	40.4	40.4
95°	65.6	78.2	80.4	80.4	78.2
97.5°	109.1	120.8	125.8	125.8	125.8
100°	159.5	169.8	173.4	173.4	172.1
102.5°	212.5	220.2	225.1	226.5	225.1
105°	270.5	274.1	276.8	279.0	279.0
107.5°	328.0	333.4	333.4	334.3	328.0
110°	383.7	391.0	391.0	391.0	387.3

TEST NUMBER: P903572

CATALOG NUMBER: DFN2DIP-SQ2F0-070D050US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	443.9	451.6	450.3	446.7	443.9
115°	503.2	510.5	508.2	506.9	503.2
117.5°	562.1	572.0	565.7	562.1	558.6
120°	621.4	631.3	621.4	621.4	617.4
122.5°	675.3	688.0	681.6	678.1	675.3
125°	732.0	743.2	739.6	735.6	734.2
127.5°	787.2	801.2	796.3	790.8	787.2
130°	839.0	855.1	852.8	850.2	845.2
132.5°	896.9	909.5	910.4	904.1	900.5
135°	946.8	960.6	963.4	962.1	958.5
137.5°	1002.5	1013.7	1016.0	1015.0	1009.7
140°	1051.4	1062.7	1068.9	1068.9	1064.0
142.5°	1101.7	1113.0	1116.6	1117.9	1113.0
145°	1149.4	1158.4	1165.5	1167.0	1162.0
147.5°	1192.1	1203.3	1208.7	1211.0	1206.0
150°	1236.1	1243.8	1248.7	1252.7	1248.7
152.5°	1275.3	1282.9	1289.1	1294.1	1289.1
155°	1314.3	1317.9	1321.9	1328.2	1324.2
157.5°	1348.0	1350.7	1352.9	1362.0	1355.7
160°	1378.1	1380.8	1382.1	1389.8	1384.4
162.5°	1406.0	1406.0	1407.3	1415.9	1409.6
165°	1429.8	1428.4	1428.4	1437.5	1431.2
167.5°	1451.3	1447.3	1447.3	1456.3	1450.0
170°	1467.5	1464.0	1462.6	1471.6	1464.0
172.5°	1478.8	1475.2	1473.9	1482.8	1475.2
175°	1487.8	1484.1	1481.5	1490.4	1482.8
177.5°	1492.7	1489.1	1486.4	1494.0	1486.4
180°	1490.4	1490.4	1490.4	1490.4	1490.4

TEST NUMBER: P903572

CATALOG NUMBER: DFN2DIP-SQ2F0-070D050US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.13	15.10	14.99	15.98	17.08	13.69	14.66	14.54	15.54	16.64
	3H	15.78	16.65	16.65	17.54	18.67	15.29	16.16	16.16	17.05	18.18
	4H	16.36	17.18	17.25	18.08	19.22	15.87	16.69	16.75	17.58	18.72
	6H	16.75	17.51	17.65	18.41	19.56	16.25	17.01	17.15	17.91	19.07
	8H	16.85	17.58	17.76	18.49	19.65	16.35	17.07	17.26	17.99	19.15
	12H	16.90	17.59	17.81	18.50	19.68	16.39	17.08	17.30	17.99	19.17
4H	2H	14.60	15.42	15.48	16.31	17.45	14.24	15.06	15.13	15.96	17.10
	3H	16.45	17.14	17.35	18.06	19.22	16.04	16.73	16.94	17.65	18.81
	4H	17.15	17.78	18.06	18.70	19.88	16.73	17.35	17.64	18.28	19.46
	6H	17.65	18.20	18.58	19.14	20.32	17.22	17.76	18.15	18.71	19.89
	8H	17.80	18.30	18.73	19.24	20.44	17.36	17.87	18.29	18.81	20.00
	12H	17.87	18.32	18.81	19.28	20.48	17.42	17.87	18.37	18.83	20.03
8H	4H	17.35	17.85	18.27	18.79	19.99	16.97	17.47	17.90	18.41	19.61
	6H	17.96	18.38	18.91	19.36	20.55	17.57	17.99	18.53	18.97	20.17
	8H	18.17	18.54	19.13	19.51	20.72	17.77	18.14	18.74	19.11	20.33
	12H	18.29	18.62	19.26	19.58	20.84	17.88	18.21	18.85	19.17	20.43
12H	4H	17.33	17.79	18.28	18.75	19.95	16.96	17.42	17.91	18.38	19.58
	6H	17.98	18.35	18.95	19.33	20.54	17.61	17.98	18.57	18.95	20.16
	8H	18.21	18.54	19.18	19.51	20.77	17.83	18.16	18.80	19.12	20.39