

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906286

Luminaire Tested: DFN2DIP-SQ2F0-060D070US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906286
REPORT IS A COMBINATION OF REPORTS P899826 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-060D070US835-RLLFLL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11295.0 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 109.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906286

CATALOG NUMBER: DFN2DIP-SQ2F0-060D070US835-RLLFLL

Luminous Intensity Polar Plot

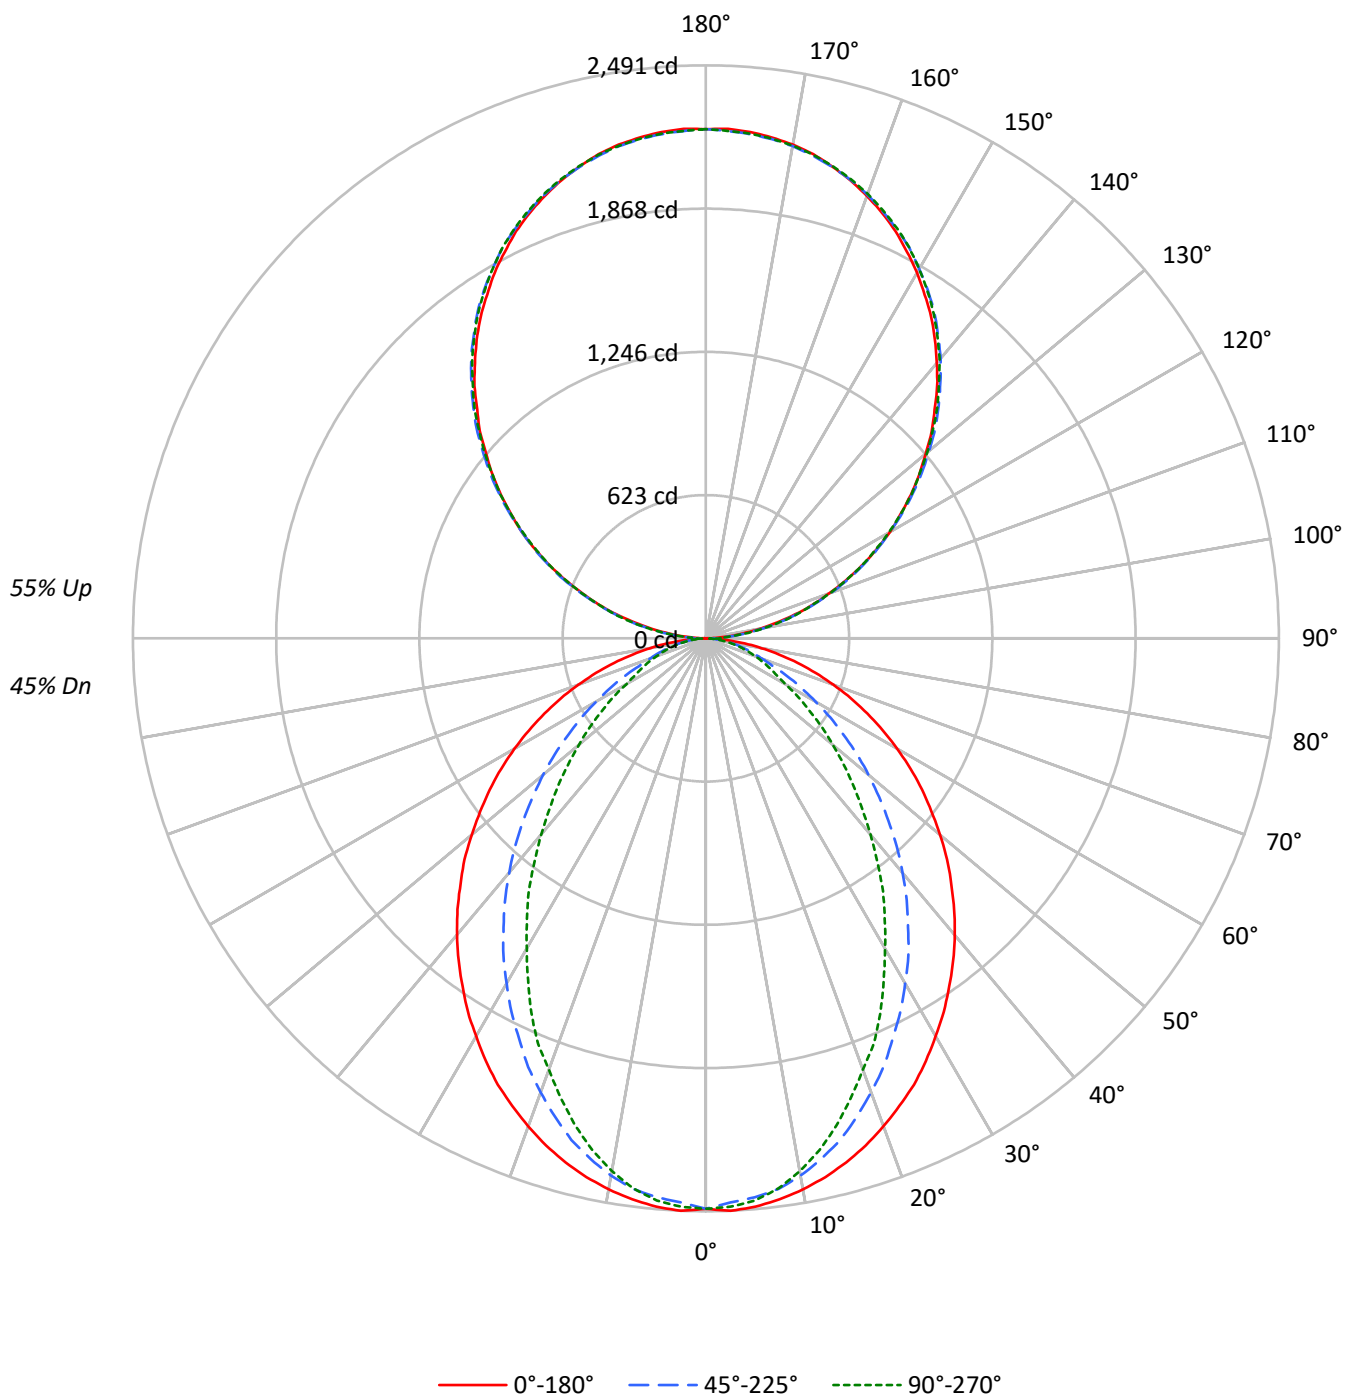

TEST NUMBER: P906286

CATALOG NUMBER: DFN2DIP-SQ2F0-060D070US835-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	97	97	97	97	81	81	81	66	66	66	52	52	52
1	97	93	89	86	89	85	82	79	71	69	67	58	57	55	46	45	44
2	89	82	76	71	81	75	70	66	63	59	56	52	49	47	41	40	38
3	81	72	65	60	74	67	60	56	56	51	48	46	43	40	37	35	33
4	75	64	57	51	68	59	53	47	50	45	41	41	38	35	33	31	29
5	69	57	50	44	63	53	46	41	45	40	36	37	33	30	30	28	25
6	63	52	44	38	58	48	41	36	41	35	31	34	30	27	28	25	23
7	59	47	39	34	54	43	36	32	37	32	28	31	27	24	25	22	20
8	54	42	35	30	50	39	33	28	34	28	25	28	24	21	23	20	18
9	51	39	32	27	47	36	30	25	31	26	22	26	22	19	22	19	17
10	47	36	29	24	44	33	27	23	29	24	20	24	20	18	20	17	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	5453	5453	5453
5°	5452	5354	5393
10°	5389	5238	5210
15°	5305	5053	4932
20°	5197	4803	4593
25°	5087	4526	4266
30°	4943	4242	3854
35°	4800	3939	3492
40°	4655	3625	3078
45°	4487	3280	2704
50°	4313	2932	2339
55°	4129	2562	1988
60°	3917	2177	1629
65°	3673	1787	1458
70°	3375	1423	1308
75°	3002	1231	1175
80°	2464	1000	996
85°	1604	621	709

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4487 cd/sqm

TEST NUMBER: P906286

CATALOG NUMBER: DFN2DIP-SQ2F0-060D070US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	232.4	2.1
10°-20°	638.0	5.6
20°-30°	895.7	7.9
30°-40°	976.4	8.6
40°-50°	897.4	7.9
50°-60°	704.8	6.2
60°-70°	458.8	4.1
70°-80°	236.1	2.1
80°-90°	66.6	0.6
90°-100°	137.0	1.2
100°-110°	435.3	3.9
110°-120°	744.9	6.6
120°-130°	979.6	8.7
130°-140°	1099.6	9.7
140°-150°	1078.3	9.5
150°-160°	904.5	8.0
160°-170°	599.9	5.3
170°-180°	209.7	1.9
0°-30°	1766.2	15.6
0°-40°	2742.6	24.3
0°-60°	4344.8	38.5
0°-90°	5106.3	45.2
90°-120°	1317.2	11.7
90°-150°	4474.7	39.6
90°-180°	6189.0	54.8
0°-180°	11295.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	2	24	65	61	63	11
95°	97	116	120	120	116	108
105°	402	407	411	414	414	424
115°	748	758	755	753	748	739
125°	1087	1104	1099	1093	1091	972
135°	1406	1427	1431	1429	1424	1087
145°	1707	1721	1731	1733	1726	1067
155°	1952	1958	1964	1973	1967	899
165°	2124	2122	2122	2135	2126	599
175°	2210	2204	2200	2214	2202	210
180°	2214	2214	2214	2214	2214	

TEST NUMBER: P906286

CATALOG NUMBER: DFN2DIP-SQ2F0-060D070US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	2.0	24.0	65.4	61.4	63.4
92.5°	41.4	56.1	58.1	60.1	60.1
95°	97.4	116.1	119.5	119.5	116.1
97.5°	162.2	179.5	186.9	186.9	186.9
100°	236.9	252.3	257.6	257.6	255.6
102.5°	315.7	327.0	334.4	336.4	334.4
105°	401.8	407.1	411.1	414.5	414.5
107.5°	487.2	495.2	495.2	496.6	487.2
110°	570.0	580.7	580.7	580.7	575.3

TEST NUMBER: P906286

CATALOG NUMBER: DFN2DIP-SQ2F0-060D070US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	659.4	670.8	668.8	663.4	659.4
115°	747.5	758.2	754.9	752.9	747.5
117.5°	834.9	849.6	840.3	834.9	829.6
120°	923.0	937.7	923.0	923.0	917.0
122.5°	1003.1	1021.8	1012.5	1007.1	1003.1
125°	1087.2	1103.9	1098.6	1092.6	1090.6
127.5°	1169.3	1190.0	1182.7	1174.7	1169.3
130°	1246.1	1270.1	1266.8	1262.8	1255.4
132.5°	1332.2	1350.9	1352.2	1342.9	1337.5
135°	1406.3	1426.9	1431.0	1428.9	1423.6
137.5°	1489.0	1505.7	1509.0	1507.7	1499.7
140°	1561.8	1578.5	1587.8	1587.8	1580.5
142.5°	1636.5	1653.2	1658.5	1660.5	1653.2
145°	1707.3	1720.6	1731.3	1733.3	1726.0
147.5°	1770.7	1787.4	1795.4	1798.7	1791.4
150°	1836.1	1847.4	1854.8	1860.8	1854.8
152.5°	1894.1	1905.5	1914.8	1922.2	1914.8
155°	1952.2	1957.5	1963.6	1972.9	1966.9
157.5°	2002.3	2006.3	2009.6	2023.0	2013.6
160°	2047.0	2051.0	2053.0	2064.3	2056.3
162.5°	2088.4	2088.4	2090.4	2103.0	2093.7
165°	2123.7	2121.7	2121.7	2135.1	2125.7
167.5°	2155.8	2149.8	2149.8	2163.1	2153.8
170°	2179.8	2174.5	2172.5	2185.8	2174.5
172.5°	2196.5	2191.1	2189.1	2202.5	2191.1
175°	2209.8	2204.5	2200.5	2213.8	2202.5
177.5°	2217.2	2211.8	2207.8	2219.2	2207.8
180°	2213.8	2213.8	2213.8	2213.8	2213.8

TEST NUMBER: P906286

CATALOG NUMBER: DFN2DIP-SQ2F0-060D070US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.46	13.25	13.46	14.26	15.60	8.42	9.21	9.42	10.22	11.56
	3H	14.11	14.82	15.13	15.84	17.20	9.59	10.30	10.60	11.31	12.68
	4H	14.71	15.38	15.73	16.40	17.77	10.02	10.69	11.05	11.71	13.08
	6H	15.11	15.73	16.15	16.75	18.14	10.33	10.94	11.36	11.97	13.35
	8H	15.23	15.81	16.27	16.86	18.23	10.41	10.99	11.45	12.04	13.41
	12H	15.28	15.84	16.33	16.87	18.27	10.44	11.00	11.49	12.03	13.43
4H	2H	12.47	13.14	13.50	14.16	15.53	9.00	9.67	10.03	10.69	12.06
	3H	14.27	14.83	15.31	15.88	17.26	10.32	10.88	11.37	11.93	13.31
	4H	14.95	15.46	15.99	16.50	17.90	10.86	11.37	11.90	12.41	13.81
	6H	15.44	15.88	16.50	16.94	18.34	11.25	11.69	12.31	12.76	14.16
	8H	15.60	16.01	16.66	17.07	18.48	11.37	11.78	12.43	12.84	14.25
	12H	15.69	16.05	16.76	17.13	18.55	11.42	11.79	12.50	12.86	14.28
8H	4H	14.91	15.31	15.96	16.37	17.79	11.12	11.53	12.18	12.59	14.00
	6H	15.45	15.79	16.53	16.89	18.30	11.61	11.95	12.69	13.05	14.46
	8H	15.65	15.95	16.74	17.03	18.46	11.79	12.09	12.88	13.17	14.60
	12H	15.78	16.04	16.87	17.11	18.59	11.89	12.15	12.98	13.23	14.70
12H	4H	14.86	15.22	15.93	16.30	17.72	11.12	11.49	12.20	12.56	13.98
	6H	15.42	15.72	16.51	16.80	18.23	11.66	11.95	12.75	13.04	14.47
	8H	15.63	15.89	16.72	16.97	18.44	11.85	12.11	12.94	13.19	14.66