

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911671

Luminaire Tested: DFN2DIP-SQ2F0-030D070US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911671
REPORT IS A COMBINATION OF REPORTS P901340 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-030D070US850-RLLONL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 10513.3 lumens
Efficiency: N/A
Efficacy: 135.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 77.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911671

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US850-RLLONL

Luminous Intensity Polar Plot

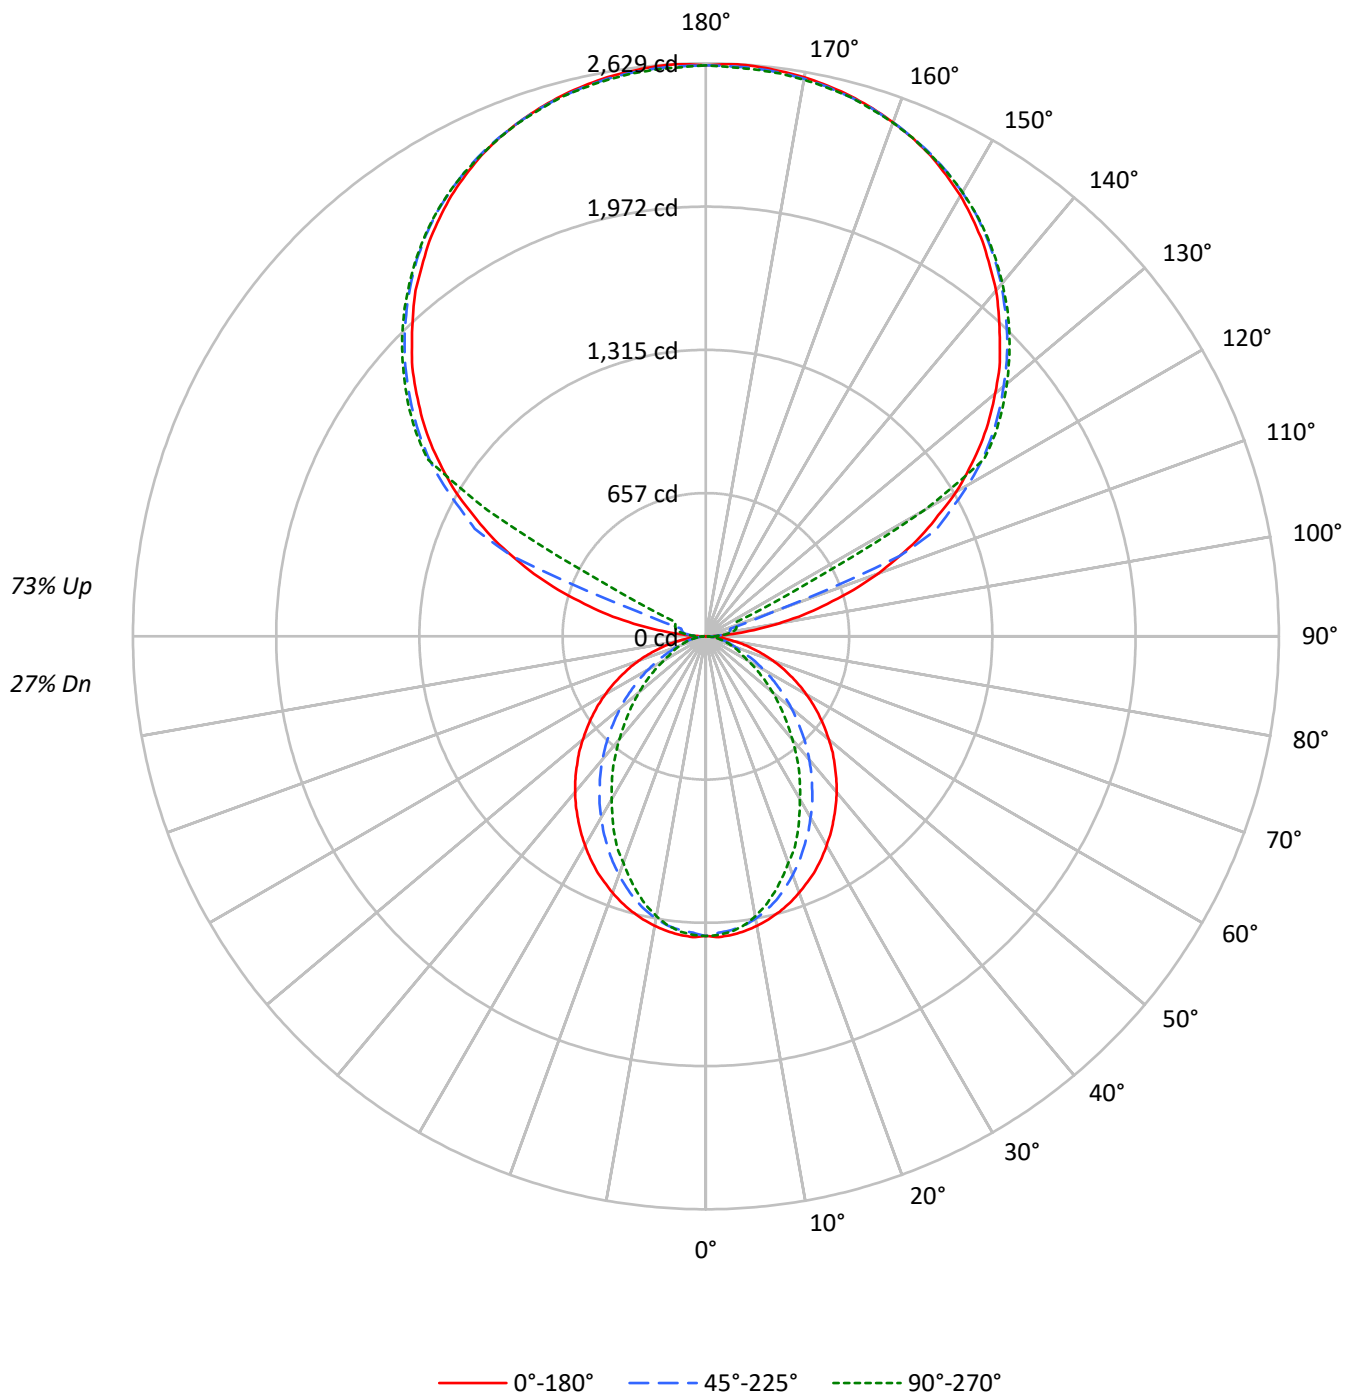

TEST NUMBER: P911671

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	71	71	71	52	52	52	35	35	35
1	93	89	85	82	83	79	76	74	62	60	58	46	45	44	31	31	30
2	85	78	72	67	75	70	65	61	55	51	49	41	39	37	28	27	26
3	77	69	62	56	69	62	56	51	48	44	41	36	34	31	25	23	22
4	71	61	53	48	63	55	48	43	43	39	35	32	29	27	22	21	19
5	65	54	46	41	58	49	42	37	39	34	30	29	26	23	20	18	17
6	60	48	41	35	53	44	37	32	35	30	26	26	23	21	18	16	15
7	55	44	36	31	49	39	33	28	31	27	23	24	21	18	17	15	13
8	51	40	32	27	46	36	29	25	29	24	21	22	19	16	16	13	12
9	48	36	29	24	43	33	26	22	26	22	18	20	17	15	14	12	11
10	44	33	26	22	40	30	24	20	24	20	16	19	15	13	13	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3023	3023	3023
5°	3023	2969	2990
10°	2988	2904	2889
15°	2942	2802	2735
20°	2882	2663	2547
25°	2821	2510	2365
30°	2741	2352	2137
35°	2662	2184	1936
40°	2581	2010	1707
45°	2488	1819	1499
50°	2391	1626	1297
55°	2290	1420	1103
60°	2172	1207	904
65°	2036	991	809
70°	1872	789	726
75°	1664	683	651
80°	1367	555	552
85°	890	344	393

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2488 cd/sqm

TEST NUMBER: P911671

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	128.9	1.2
10°-20°	353.8	3.4
20°-30°	496.7	4.7
30°-40°	541.4	5.1
40°-50°	497.6	4.7
50°-60°	390.8	3.7
60°-70°	254.4	2.4
70°-80°	130.9	1.2
80°-90°	38.0	0.4
90°-100°	86.4	0.8
100°-110°	322.1	3.1
110°-120°	854.1	8.1
120°-130°	1416.6	13.5
130°-140°	1504.8	14.3
140°-150°	1398.5	13.3
150°-160°	1124.4	10.7
160°-170°	724.5	6.9
170°-180°	249.4	2.4
0°-30°	979.3	9.3
0°-40°	1520.7	14.5
0°-60°	2409.2	22.9
0°-90°	2832.5	26.9
90°-120°	1262.6	12.0
90°-150°	5582.5	53.1
90°-180°	7681.0	73.1
0°-180°	10513.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1375	1375	1375	1375	1375	
5°	1375	1369	1353	1364	1360	130
15°	1308	1294	1252	1228	1216	369
25°	1187	1147	1065	1014	995	546
35°	1023	959	850	772	744	640
45°	836	753	622	534	504	646
55°	636	539	404	330	306	568
65°	429	328	216	174	170	426
75°	229	142	100	91	90	242
85°	54	27	24	24	24	61
90°	2	23	38	48	51	10
95°	123	61	74	84	82	146
105°	576	633	116	136	144	616
115°	1090	1122	1170	292	156	1073
125°	1541	1566	1602	1615	1621	1375
135°	1907	1938	1954	1974	1970	1473
145°	2212	2210	2243	2256	2246	1384
155°	2436	2419	2442	2453	2438	1123
165°	2567	2556	2561	2574	2561	725
175°	2626	2612	2616	2629	2610	250
180°	2620	2620	2620	2620	2620	

TEST NUMBER: P911671

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1375.0	1375.0	1375.0	1375.0	1375.0
2.5°	1381.3	1375.0	1361.3	1373.8	1371.4
5°	1375.0	1368.8	1352.6	1363.8	1360.1
7.5°	1363.8	1356.4	1339.0	1343.9	1337.7
10°	1348.9	1340.2	1315.4	1311.5	1304.2
12.5°	1330.2	1319.0	1285.4	1278.0	1264.3
15°	1307.8	1294.1	1251.8	1228.2	1215.8
17.5°	1281.7	1261.8	1209.5	1182.2	1162.2
20°	1251.8	1226.9	1164.7	1133.7	1106.2
22.5°	1219.6	1190.8	1118.6	1076.4	1057.8
25°	1187.2	1147.3	1065.2	1014.2	995.4
27.5°	1148.6	1106.2	1015.4	957.0	928.2
30°	1107.6	1060.2	960.6	897.3	863.6
32.5°	1067.6	1010.4	908.5	833.7	802.6
35°	1022.9	959.4	849.9	771.5	744.1
37.5°	979.4	910.8	795.2	709.2	678.3
40°	933.3	858.7	737.9	649.5	617.3
42.5°	886.0	806.5	680.7	588.5	557.5
45°	836.3	752.8	622.3	533.8	503.9
47.5°	788.9	700.7	566.3	477.8	450.5
50°	736.7	648.3	511.5	425.5	399.5
52.5°	685.6	592.3	459.2	377.1	353.4
55°	635.8	538.8	404.3	329.8	306.2
57.5°	584.9	485.3	356.0	286.2	266.3
60°	532.5	433.1	304.9	241.4	221.6
62.5°	481.6	382.1	261.3	201.6	191.7
65°	429.3	328.5	216.5	174.2	170.5
67.5°	379.6	278.7	174.2	153.0	149.3
70°	327.3	230.2	144.3	131.9	126.9
72.5°	277.5	185.3	120.7	110.8	108.2
75°	228.9	141.8	99.6	90.8	89.6
77.5°	180.4	100.7	78.4	73.4	70.9
80°	135.6	72.2	59.7	54.8	54.8
82.5°	94.5	48.6	41.0	38.6	38.6
85°	53.5	27.3	23.6	23.6	23.6
87.5°	20.0	9.9	9.9	8.8	8.8
90°	1.8	22.7	37.8	47.5	51.1
92.5°	47.5	39.8	45.5	49.4	51.1
95°	123.1	60.6	73.9	83.5	81.5
97.5°	221.7	66.4	96.6	102.5	104.2
100°	335.7	75.9	108.0	123.1	127.0
102.5°	460.6	457.0	111.9	132.6	138.4
105°	576.3	633.2	115.7	136.4	144.1
107.5°	710.9	758.2	119.6	140.3	147.9
110°	840.0	879.5	331.8	142.3	149.7

TEST NUMBER: P911671

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	961.3	995.2	963.1	145.8	151.7
115°	1090.0	1122.2	1169.7	292.0	155.6
117.5°	1201.9	1239.8	1272.1	1000.9	504.3
120°	1327.0	1355.4	1389.7	1412.4	1156.5
122.5°	1433.0	1463.4	1501.6	1512.8	1514.8
125°	1541.2	1565.9	1602.0	1615.3	1620.8
127.5°	1639.8	1666.3	1694.9	1713.8	1715.6
130°	1732.7	1763.1	1783.8	1804.8	1803.0
132.5°	1827.5	1852.3	1873.0	1890.1	1888.3
135°	1907.1	1937.5	1954.5	1973.6	1969.8
137.5°	1990.4	2013.3	2032.4	2051.3	2045.7
140°	2071.9	2087.2	2108.0	2125.1	2115.6
142.5°	2140.4	2153.7	2178.2	2193.3	2183.8
145°	2212.5	2210.5	2242.6	2255.9	2246.5
147.5°	2274.8	2269.2	2301.4	2310.8	2303.4
150°	2335.6	2322.4	2352.7	2363.9	2354.5
152.5°	2386.7	2371.6	2400.0	2411.4	2398.2
155°	2436.0	2419.1	2441.8	2453.1	2438.0
157.5°	2475.8	2460.8	2477.8	2491.1	2475.8
160°	2510.1	2498.6	2510.1	2521.3	2508.0
162.5°	2540.3	2529.0	2538.4	2551.7	2534.6
165°	2566.8	2555.6	2561.1	2574.4	2561.1
167.5°	2587.7	2576.2	2582.1	2595.4	2578.3
170°	2604.8	2593.4	2597.2	2610.5	2593.4
172.5°	2616.1	2604.8	2608.7	2621.9	2604.8
175°	2625.6	2612.2	2616.1	2629.3	2610.5
177.5°	2629.3	2616.1	2618.1	2631.4	2614.2
180°	2619.9	2619.9	2619.9	2619.9	2619.9

TEST NUMBER: P911671

CATALOG NUMBER: DFN2DIP-SQ2F0-030D070US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.21	8.88	9.34	10.00	11.57	4.17	4.84	5.30	5.96	7.53
	3H	9.85	10.45	11.00	11.59	13.17	5.32	5.92	6.47	7.06	8.64
	4H	10.44	11.01	11.59	12.14	13.73	5.75	6.32	6.91	7.46	9.05
	6H	10.84	11.36	12.00	12.50	14.10	6.05	6.57	7.21	7.71	9.31
	8H	10.95	11.45	12.11	12.60	14.19	6.13	6.63	7.29	7.78	9.37
	12H	11.00	11.47	12.17	12.62	14.23	6.16	6.63	7.33	7.78	9.39
4H	2H	8.20	8.77	9.36	9.90	11.49	4.73	5.30	5.89	6.43	8.02
	3H	9.99	10.47	11.16	11.63	13.23	6.05	6.52	7.21	7.68	9.28
	4H	10.66	11.10	11.83	12.25	13.87	6.57	7.01	7.74	8.16	9.78
	6H	11.15	11.52	12.32	12.69	14.30	6.96	7.34	8.14	8.51	10.12
	8H	11.31	11.66	12.48	12.82	14.45	7.08	7.43	8.25	8.59	10.21
	12H	11.39	11.70	12.58	12.88	14.51	7.13	7.44	8.31	8.61	10.25
8H	4H	10.61	10.96	11.79	12.12	13.75	6.83	7.18	8.00	8.34	9.96
	6H	11.15	11.44	12.34	12.64	14.27	7.32	7.60	8.51	8.81	10.43
	8H	11.35	11.60	12.55	12.79	14.43	7.49	7.74	8.69	8.92	10.57
	12H	11.47	11.69	12.67	12.87	14.55	7.59	7.81	8.79	8.99	10.67
12H	4H	10.56	10.87	11.75	12.05	13.68	6.82	7.14	8.01	8.31	9.94
	6H	11.12	11.37	12.32	12.56	14.20	7.36	7.61	8.56	8.79	10.44
	8H	11.32	11.54	12.52	12.72	14.40	7.55	7.77	8.75	8.95	10.62