

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P911739

Luminaire Tested: DFN2DIP-SQ2F0-060D060US850-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P911739
REPORT IS A COMBINATION OF REPORTS P901334 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-060D060US850-RLLONL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12243.4 lumens
Efficiency: N/A
Efficacy: 121.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 100.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P911739

CATALOG NUMBER: DFN2DIP-SQ2F0-060D060US850-RLLONL

Luminous Intensity Polar Plot

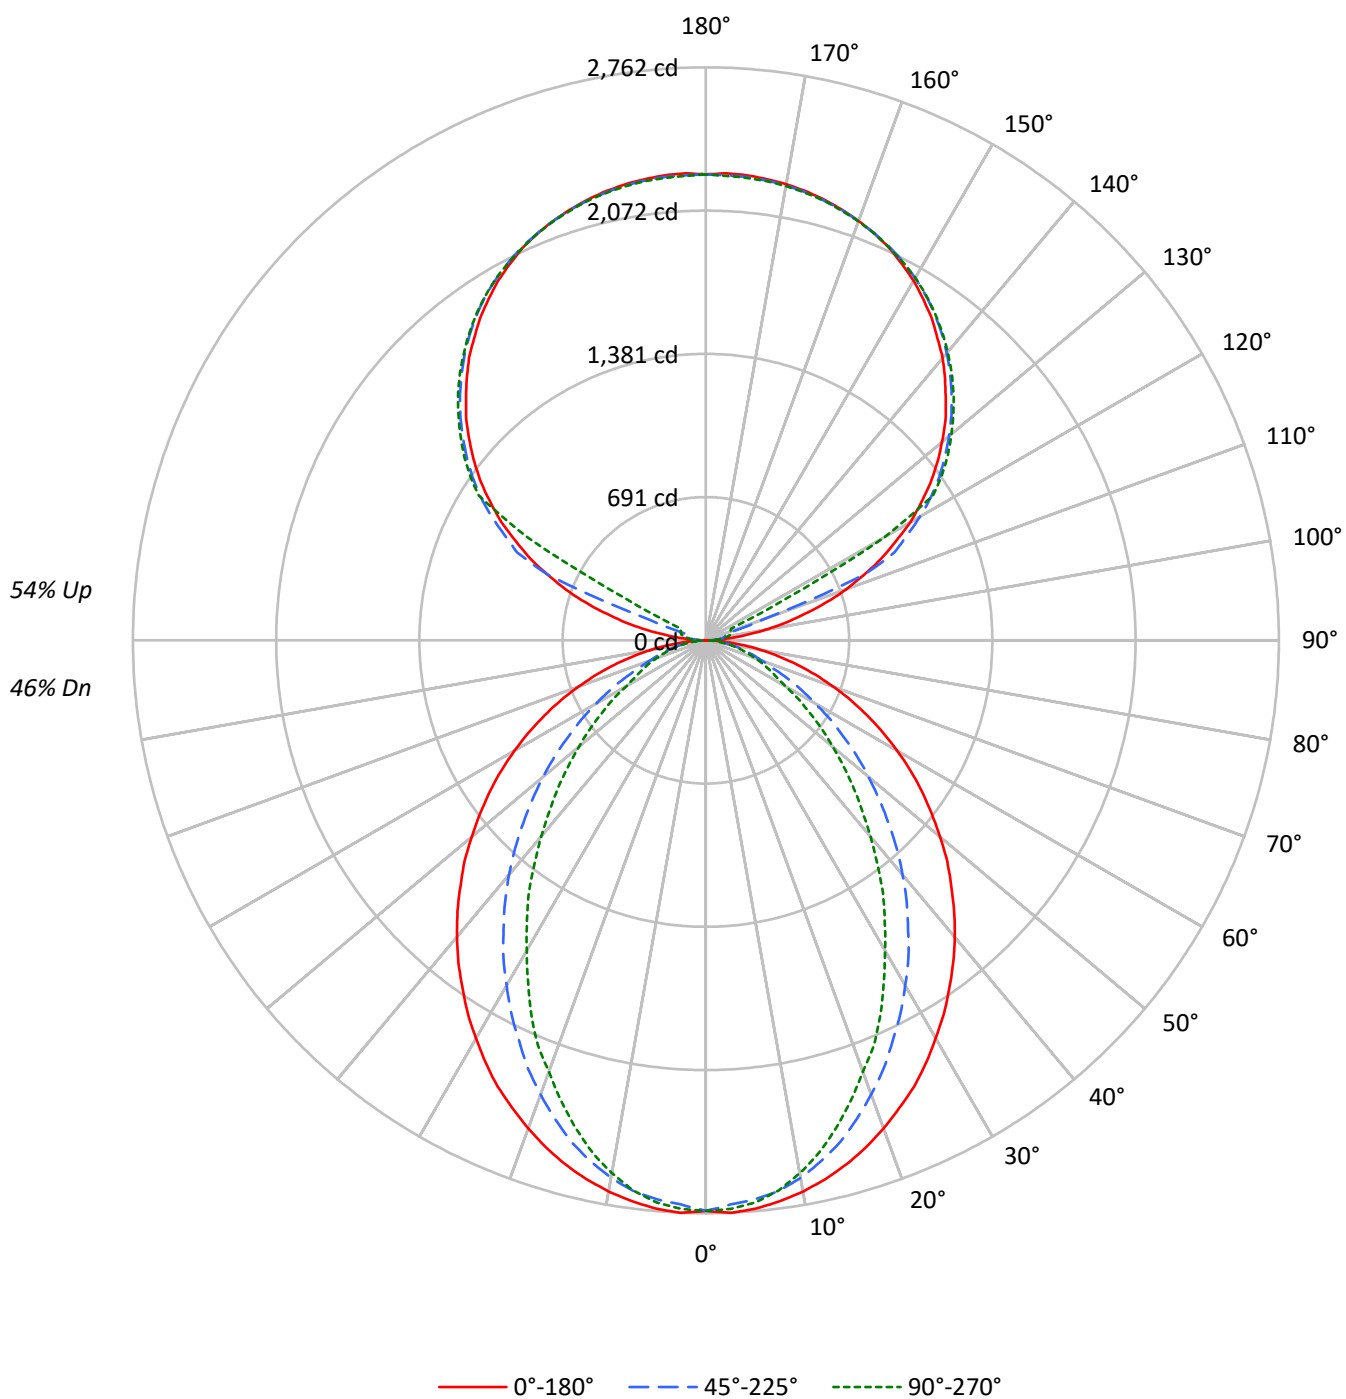

TEST NUMBER: P911739

CATALOG NUMBER: DFN2DIP-SQ2F0-060D060US850-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	106	106	106	106	98	98	98	98	81	81	81	66	66	66	53	53	53
1	97	93	90	86	89	86	83	80	72	70	68	59	58	56	47	46	45
2	89	82	76	71	82	76	70	66	63	60	57	52	50	48	42	40	39
3	81	72	65	60	75	67	61	56	56	52	48	47	43	41	38	35	34
4	75	64	57	51	68	60	53	48	50	45	41	42	38	35	34	31	29
5	69	58	50	44	63	53	46	41	45	40	36	38	34	31	31	28	26
6	63	52	44	38	58	48	41	36	41	36	32	34	30	27	28	25	23
7	59	47	39	34	54	44	37	32	37	32	28	31	27	24	26	23	21
8	55	43	35	30	50	40	33	28	34	29	25	29	25	22	24	21	19
9	51	39	32	27	47	36	30	25	31	26	22	27	23	20	22	19	17
10	48	36	29	24	44	33	27	23	29	24	20	25	21	18	20	18	15

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6047	6047	6047
5°	6046	5938	5981
10°	5976	5809	5778
15°	5883	5604	5469
20°	5764	5327	5093
25°	5642	5019	4731
30°	5481	4704	4274
35°	5323	4368	3872
40°	5162	4020	3414
45°	4976	3638	2999
50°	4783	3252	2594
55°	4580	2841	2205
60°	4344	2414	1807
65°	4073	1982	1617
70°	3743	1578	1451
75°	3329	1366	1303
80°	2734	1109	1105
85°	1778	688	785

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 4976 cd/sqm

TEST NUMBER: P911739

CATALOG NUMBER: DFN2DIP-SQ2F0-060D060US850-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	257.7	2.1
10°-20°	707.6	5.8
20°-30°	993.4	8.1
30°-40°	1082.8	8.8
40°-50°	995.2	8.1
50°-60°	781.6	6.4
60°-70°	508.8	4.2
70°-80°	261.9	2.1
80°-90°	70.8	0.6
90°-100°	74.1	0.6
100°-110°	276.0	2.3
110°-120°	732.1	6.0
120°-130°	1214.2	9.9
130°-140°	1289.8	10.5
140°-150°	1198.7	9.8
150°-160°	963.8	7.9
160°-170°	621.0	5.1
170°-180°	213.7	1.7
0°-30°	1958.7	16.0
0°-40°	3041.5	24.8
0°-60°	4818.4	39.4
0°-90°	5659.9	46.2
90°-120°	1082.2	8.8
90°-150°	4785.0	39.1
90°-180°	6583.0	53.8
0°-180°	12243.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2750	2750	2750	2750	2750	
5°	2750	2738	2705	2728	2720	261
15°	2616	2588	2504	2456	2432	737
25°	2374	2295	2130	2028	1991	1092
35°	2046	1919	1700	1543	1488	1281
45°	1672	1506	1244	1068	1008	1292
55°	1272	1078	809	660	612	1136
65°	859	657	433	349	341	851
75°	458	284	199	182	179	484
85°	107	55	47	47	47	123
90°	2	20	32	41	44	11
95°	106	52	63	72	70	125
105°	494	543	99	117	124	528
115°	934	962	1003	250	133	920
125°	1321	1342	1373	1384	1389	1178
135°	1635	1661	1675	1692	1688	1263
145°	1896	1895	1922	1934	1926	1186
155°	2088	2074	2093	2103	2090	962
165°	2200	2190	2195	2207	2195	622
175°	2250	2239	2242	2254	2238	214
180°	2246	2246	2246	2246	2246	

TEST NUMBER: P911739

CATALOG NUMBER: DFN2DIP-SQ2F0-060D060US850-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2750.1	2750.1	2750.1	2750.1	2750.1
2.5°	2762.5	2750.1	2722.6	2747.7	2742.7
5°	2750.1	2737.7	2705.2	2727.7	2720.3
7.5°	2727.7	2712.8	2678.0	2687.8	2675.4
10°	2697.8	2680.3	2630.8	2623.1	2608.3
12.5°	2660.6	2638.1	2570.8	2556.0	2528.5
15°	2615.7	2588.2	2503.7	2456.4	2431.6
17.5°	2563.5	2523.5	2419.0	2364.3	2324.5
20°	2503.7	2453.8	2329.5	2267.4	2212.5
22.5°	2439.0	2381.7	2237.3	2152.8	2115.5
25°	2374.4	2294.6	2130.4	2028.5	1991.0
27.5°	2297.3	2212.5	2030.8	1913.8	1856.6
30°	2215.1	2120.3	1921.2	1794.5	1727.2
32.5°	2135.4	2020.8	1817.0	1667.5	1605.2
35°	2045.9	1918.9	1700.0	1543.1	1488.2
37.5°	1958.7	1821.6	1590.4	1418.5	1356.4
40°	1866.6	1717.4	1475.7	1299.1	1234.4
42.5°	1772.1	1612.8	1361.4	1177.1	1115.1
45°	1672.5	1505.6	1244.5	1067.5	1007.9
47.5°	1578.0	1401.3	1132.5	955.6	901.0
50°	1473.4	1296.8	1022.9	851.0	799.0
52.5°	1371.2	1184.5	918.4	754.1	706.9
55°	1271.7	1077.6	808.8	659.6	612.3
57.5°	1169.8	970.6	711.9	572.5	532.5
60°	1065.2	866.1	609.7	483.0	443.0
62.5°	963.3	764.2	522.6	403.2	383.4
65°	858.7	657.0	433.1	348.6	340.9
67.5°	759.1	557.4	348.6	306.1	298.7
70°	654.5	460.5	288.6	263.8	253.7
72.5°	555.1	370.7	241.3	221.6	216.5
75°	457.9	283.6	199.1	181.7	179.3
77.5°	361.0	201.5	156.8	146.8	141.8
80°	271.2	144.4	119.3	109.6	109.6
82.5°	189.1	97.1	82.1	77.1	77.1
85°	106.9	54.7	47.2	47.2	47.2
87.5°	39.9	19.9	19.9	17.4	17.4
90°	1.6	19.5	32.4	40.7	43.8
92.5°	40.7	34.2	38.9	42.3	43.8
95°	105.6	51.9	63.3	71.6	69.9
97.5°	190.1	56.9	82.7	87.8	89.4
100°	287.7	65.0	92.6	105.6	108.8
102.5°	394.8	391.7	95.9	113.7	118.7
105°	493.9	542.7	99.1	116.9	123.5
107.5°	609.4	649.9	102.5	120.2	126.8
110°	720.0	753.9	284.5	122.0	128.3

TEST NUMBER: P911739

CATALOG NUMBER: DFN2DIP-SQ2F0-060D060US850-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	823.9	853.0	825.4	125.0	130.1
115°	934.3	961.9	1002.6	250.3	133.3
117.5°	1030.2	1062.6	1090.4	857.9	432.2
120°	1137.5	1161.8	1191.2	1210.6	991.2
122.5°	1228.3	1254.4	1287.0	1296.6	1298.4
125°	1321.0	1342.2	1373.1	1384.5	1389.2
127.5°	1405.5	1428.3	1452.8	1469.0	1470.5
130°	1485.2	1511.2	1529.0	1546.9	1545.4
132.5°	1566.5	1587.6	1605.4	1620.0	1618.5
135°	1634.8	1660.8	1675.3	1691.7	1688.3
137.5°	1706.1	1725.6	1742.0	1758.2	1753.4
140°	1776.0	1789.1	1806.9	1821.5	1813.4
142.5°	1834.6	1846.0	1867.1	1880.0	1871.9
145°	1896.4	1894.6	1922.2	1933.7	1925.6
147.5°	1949.8	1945.0	1972.6	1980.7	1974.4
150°	2002.0	1990.5	2016.6	2026.3	2018.2
152.5°	2045.8	2032.8	2057.1	2067.0	2055.5
155°	2088.0	2073.5	2093.0	2102.7	2089.7
157.5°	2122.2	2109.2	2123.8	2135.3	2122.2
160°	2151.5	2141.6	2151.5	2161.1	2149.8
162.5°	2177.3	2167.7	2175.7	2187.2	2172.5
165°	2200.1	2190.5	2195.3	2206.7	2195.3
167.5°	2218.0	2208.2	2213.2	2224.7	2209.9
170°	2232.7	2222.9	2226.2	2237.5	2222.9
172.5°	2242.4	2232.7	2236.0	2247.4	2232.7
175°	2250.5	2239.1	2242.4	2253.7	2237.5
177.5°	2253.7	2242.4	2244.1	2255.5	2240.8
180°	2245.6	2245.6	2245.6	2245.6	2245.6

TEST NUMBER: P911739

CATALOG NUMBER: DFN2DIP-SQ2F0-060D060US850-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	12.92	13.72	13.92	14.72	16.05	8.88	9.68	9.88	10.68	12.01
	3H	14.58	15.29	15.58	16.30	17.65	10.05	10.77	11.06	11.78	13.13
	4H	15.17	15.85	16.19	16.86	18.22	10.49	11.16	11.51	12.18	13.53
	6H	15.58	16.20	16.60	17.22	18.59	10.79	11.41	11.82	12.43	13.80
	8H	15.69	16.28	16.73	17.32	18.68	10.87	11.46	11.91	12.50	13.86
	12H	15.75	16.31	16.78	17.34	18.72	10.91	11.47	11.94	12.50	13.88
4H	2H	12.93	13.61	13.96	14.62	15.98	9.46	10.14	10.49	11.16	12.51
	3H	14.73	15.30	15.77	16.34	17.71	10.79	11.35	11.82	12.40	13.76
	4H	15.41	15.93	16.45	16.96	18.35	11.32	11.84	12.36	12.87	14.26
	6H	15.91	16.35	16.96	17.41	18.79	11.72	12.16	12.77	13.22	14.61
	8H	16.07	16.48	17.12	17.53	18.93	11.84	12.25	12.89	13.30	14.70
	12H	16.15	16.52	17.22	17.59	19.00	11.89	12.26	12.96	13.33	14.74
8H	4H	15.37	15.78	16.42	16.84	18.24	11.59	12.00	12.64	13.05	14.45
	6H	15.92	16.26	16.99	17.35	18.75	12.08	12.42	13.15	13.51	14.91
	8H	16.12	16.42	17.20	17.49	18.91	12.26	12.56	13.34	13.63	15.05
	12H	16.24	16.50	17.33	17.58	19.04	12.36	12.62	13.44	13.69	15.15
12H	4H	15.32	15.69	16.39	16.76	18.17	11.59	11.96	12.66	13.03	14.43
	6H	15.89	16.19	16.97	17.26	18.68	12.12	12.42	13.21	13.50	14.92
	8H	16.09	16.36	17.18	17.43	18.89	12.32	12.58	13.40	13.65	15.11