

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914422

Luminaire Tested: DFN2DIP-SQ2F0-040D070US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914422
REPORT IS A COMBINATION OF REPORTS P899822 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-040D070US927-RLLFLL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7601.0 lumens
Efficiency: N/A
Efficacy: 86.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 88.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914422

CATALOG NUMBER: DFN2DIP-SQ2F0-040D070US927-RLLFLL

Luminous Intensity Polar Plot

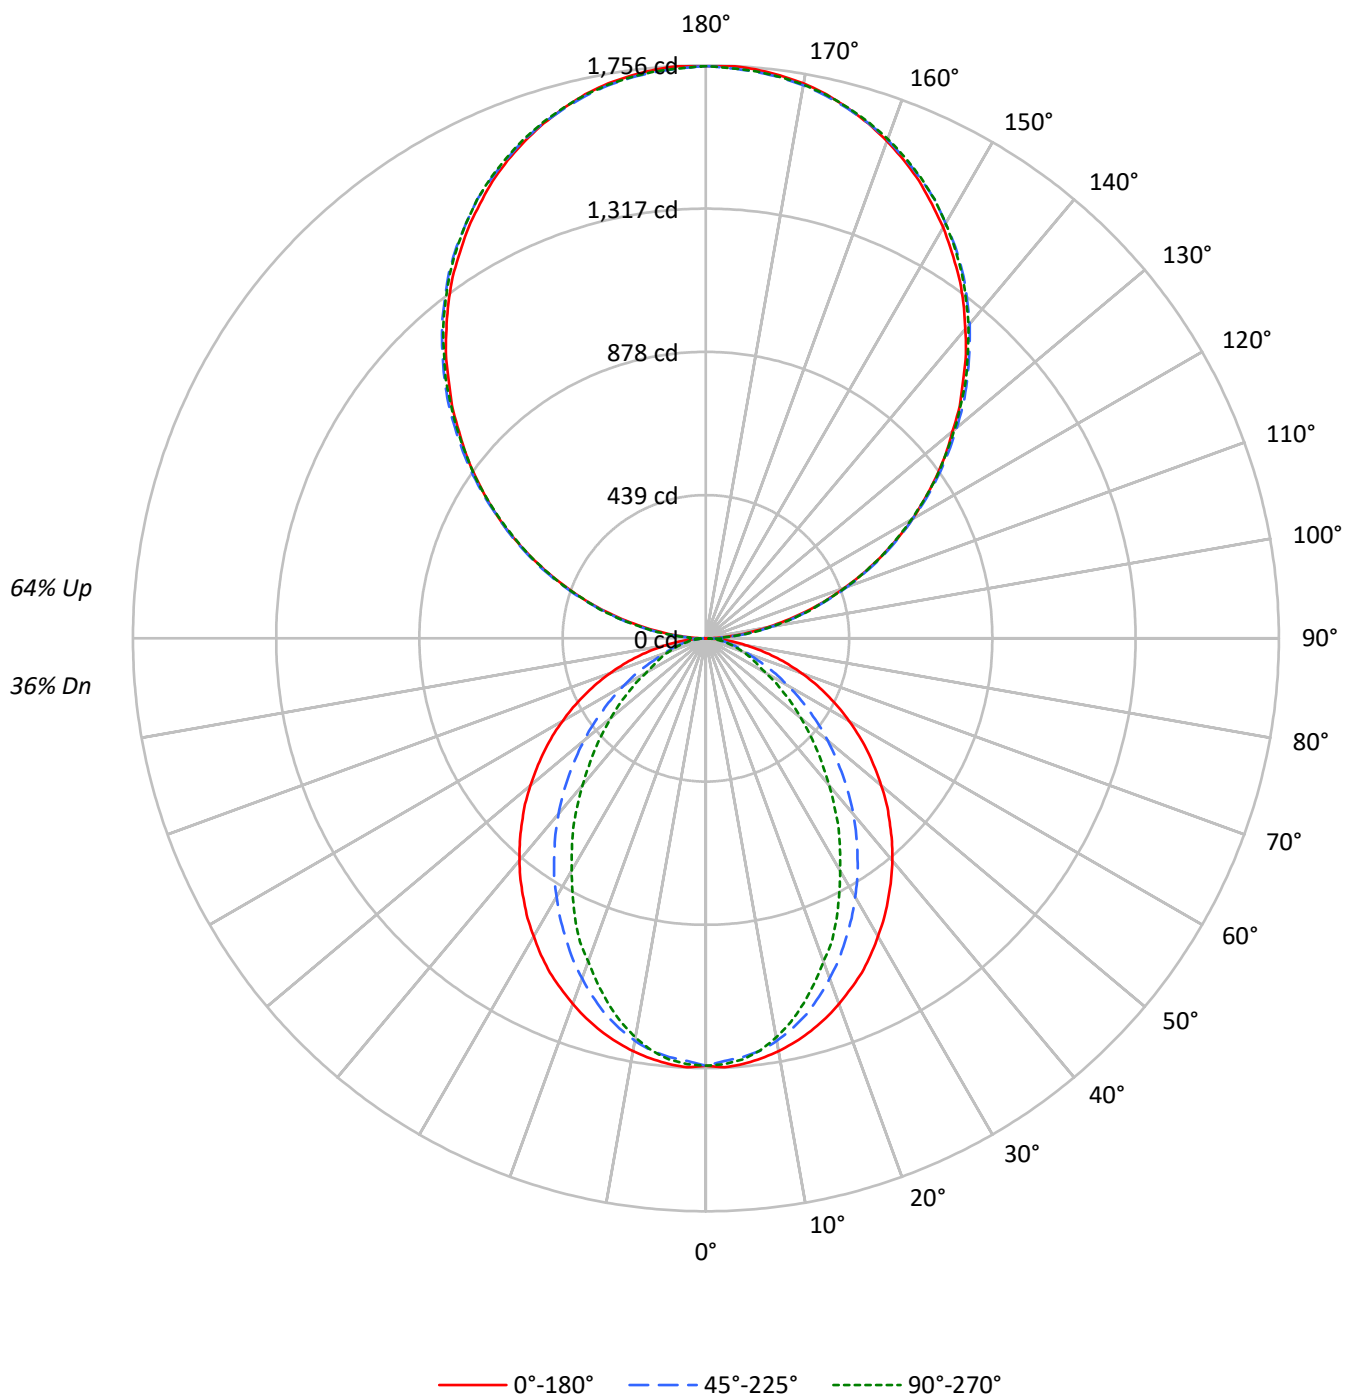

TEST NUMBER: P914422

CATALOG NUMBER: DFN2DIP-SQ2F0-040D070US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	75	75	75	58	58	58	43	43	43
1	95	91	87	84	86	82	79	76	66	64	62	52	50	49	38	37	37
2	87	80	74	69	78	72	67	63	59	55	52	46	44	42	34	33	31
3	79	70	63	58	71	64	58	53	52	48	44	41	38	36	31	29	27
4	73	62	55	49	65	57	50	45	46	42	38	37	33	31	27	25	24
5	67	56	48	42	60	51	44	39	42	37	33	33	29	27	25	23	21
6	61	50	42	37	55	46	39	34	37	32	29	30	26	24	23	20	18
7	57	45	37	32	51	41	35	30	34	29	25	27	24	21	21	18	17
8	53	41	33	28	48	38	31	26	31	26	23	25	21	19	19	17	15
9	49	37	30	25	44	34	28	24	28	24	20	23	19	17	18	15	14
10	46	34	27	23	42	31	25	21	26	21	18	21	18	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2880	2880	2880
5°	2879	2828	2848
10°	2846	2766	2751
15°	2802	2669	2605
20°	2745	2537	2426
25°	2687	2390	2253
30°	2610	2240	2035
35°	2535	2080	1844
40°	2458	1915	1626
45°	2370	1732	1428
50°	2277	1548	1235
55°	2181	1353	1050
60°	2069	1149	861
65°	1940	944	770
70°	1783	751	691
75°	1585	650	621
80°	1301	528	526
85°	847	328	374

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2442 cd/sqm

TEST NUMBER: P914422

CATALOG NUMBER: DFN2DIP-SQ2F0-040D070US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	122.7	1.6
10°-20°	336.9	4.4
20°-30°	473.1	6.2
30°-40°	515.7	6.8
40°-50°	473.9	6.2
50°-60°	372.2	4.9
60°-70°	242.3	3.2
70°-80°	124.7	1.6
80°-90°	36.8	0.5
90°-100°	108.5	1.4
100°-110°	344.8	4.5
110°-120°	590.1	7.8
120°-130°	776.1	10.2
130°-140°	871.1	11.5
140°-150°	854.2	11.2
150°-160°	716.6	9.4
160°-170°	475.2	6.3
170°-180°	166.1	2.2
0°-30°	932.7	12.3
0°-40°	1448.4	19.1
0°-60°	2294.6	30.2
0°-90°	2698.4	35.5
90°-120°	1043.4	13.7
90°-150°	3544.8	46.6
90°-180°	4903.0	64.5
0°-180°	7601.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1310	1310	1310	1310	1310	
5°	1310	1304	1288	1299	1296	124
15°	1246	1233	1192	1170	1158	351
25°	1131	1093	1014	966	948	520
35°	974	914	810	735	709	610
45°	796	717	593	508	480	615
55°	606	513	385	314	292	541
65°	409	313	206	166	162	405
75°	218	135	95	86	85	231
85°	51	26	22	22	22	58
90°	2	19	52	49	50	8
95°	77	92	95	95	92	86
105°	318	322	326	328	328	336
115°	592	601	598	596	592	586
125°	861	874	870	866	864	770
135°	1114	1130	1134	1132	1128	861
145°	1352	1363	1372	1373	1367	845
155°	1546	1551	1556	1563	1558	712
165°	1682	1681	1681	1691	1684	475
175°	1751	1746	1743	1754	1745	166
180°	1754	1754	1754	1754	1754	

TEST NUMBER: P914422

CATALOG NUMBER: DFN2DIP-SQ2F0-040D070US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1309.6	1309.6	1309.6	1309.6	1309.6
2.5°	1315.6	1309.6	1296.6	1308.5	1306.1
5°	1309.6	1303.7	1288.2	1298.9	1295.5
7.5°	1298.9	1291.9	1275.3	1279.9	1274.1
10°	1284.8	1276.4	1252.8	1249.1	1242.1
12.5°	1267.0	1256.3	1224.2	1217.2	1204.1
15°	1245.6	1232.6	1192.3	1169.8	1158.0
17.5°	1220.8	1201.7	1151.9	1125.9	1106.9
20°	1192.3	1168.5	1109.3	1079.7	1053.6
22.5°	1161.5	1134.2	1065.4	1025.2	1007.5
25°	1130.7	1092.7	1014.5	966.0	948.1
27.5°	1094.0	1053.6	967.1	911.4	884.1
30°	1054.9	1009.7	914.9	854.5	822.5
32.5°	1016.9	962.3	865.2	794.1	764.4
35°	974.3	913.8	809.5	734.8	708.7
37.5°	932.8	867.5	757.3	675.5	645.9
40°	888.9	817.8	702.8	618.7	587.9
42.5°	843.8	768.0	648.3	560.5	531.0
45°	796.5	717.0	592.6	508.4	480.0
47.5°	751.5	667.3	539.3	455.1	429.0
50°	701.6	617.5	487.1	405.3	380.5
52.5°	653.0	564.1	437.4	359.1	336.6
55°	605.6	513.2	385.2	314.1	291.6
57.5°	557.1	462.2	339.0	272.6	253.7
60°	507.2	412.4	290.3	230.0	211.0
62.5°	458.8	363.9	248.8	192.0	182.6
65°	408.9	312.8	206.2	166.0	162.3
67.5°	361.6	265.5	166.0	145.8	142.2
70°	311.7	219.3	137.4	125.6	120.8
72.5°	264.4	176.6	114.9	105.5	103.1
75°	218.0	135.1	94.8	86.5	85.4
77.5°	171.9	95.9	74.7	69.9	67.5
80°	129.1	68.8	56.8	52.2	52.2
82.5°	90.1	46.3	39.1	36.7	36.7
85°	50.9	26.1	22.5	22.5	22.5
87.5°	19.0	9.4	9.4	8.3	8.3
90°	1.6	19.0	51.8	48.6	50.2
92.5°	32.8	44.4	46.0	47.6	47.6
95°	77.2	92.0	94.7	94.7	92.0
97.5°	128.5	142.2	148.1	148.1	148.1
100°	187.7	199.9	204.1	204.1	202.5
102.5°	250.1	259.0	264.9	266.5	264.9
105°	318.3	322.5	325.7	328.4	328.4
107.5°	386.0	392.3	392.3	393.4	386.0
110°	451.5	460.0	460.0	460.0	455.7

TEST NUMBER: P914422

CATALOG NUMBER: DFN2DIP-SQ2F0-040D070US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	522.4	531.4	529.8	525.5	522.4
115°	592.2	600.6	598.0	596.4	592.2
117.5°	661.4	673.0	665.7	661.4	657.2
120°	731.2	742.8	731.2	731.2	726.4
122.5°	794.6	809.5	802.1	797.8	794.6
125°	861.3	874.5	870.3	865.5	864.0
127.5°	926.3	942.7	936.9	930.6	926.3
130°	987.1	1006.1	1003.5	1000.4	994.5
132.5°	1055.3	1070.2	1071.2	1063.8	1059.5
135°	1114.0	1130.4	1133.6	1131.9	1127.7
137.5°	1179.6	1192.8	1195.4	1194.4	1188.0
140°	1237.2	1250.5	1257.8	1257.8	1252.0
142.5°	1296.4	1309.6	1313.8	1315.4	1309.6
145°	1352.5	1363.0	1371.5	1373.1	1367.3
147.5°	1402.7	1415.9	1422.3	1424.9	1419.1
150°	1454.5	1463.5	1469.3	1474.1	1469.3
152.5°	1500.5	1509.5	1516.9	1522.7	1516.9
155°	1546.5	1550.7	1555.5	1562.9	1558.1
157.5°	1586.2	1589.4	1592.0	1602.6	1595.1
160°	1621.6	1624.8	1626.3	1635.3	1629.0
162.5°	1654.4	1654.4	1656.0	1666.0	1658.6
165°	1682.4	1680.8	1680.8	1691.4	1683.9
167.5°	1707.8	1703.0	1703.0	1713.6	1706.2
170°	1726.8	1722.6	1721.0	1731.5	1722.6
172.5°	1740.0	1735.7	1734.2	1744.8	1735.7
175°	1750.6	1746.4	1743.2	1753.7	1744.8
177.5°	1756.4	1752.1	1749.0	1758.0	1749.0
180°	1753.7	1753.7	1753.7	1753.7	1753.7



TEST NUMBER: P914422

CATALOG NUMBER: DFN2DIP-SQ2F0-040D070US927-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.18	9.90	10.25	10.98	12.44	5.14	5.86	6.22	6.94	8.40
	3H	10.83	11.47	11.91	12.56	14.04	6.30	6.95	7.39	8.03	9.52
	4H	11.42	12.03	12.52	13.12	14.61	6.73	7.35	7.83	8.43	9.92
	6H	11.82	12.38	12.92	13.47	14.97	7.03	7.60	8.14	8.68	10.19
	8H	11.93	12.47	13.04	13.57	15.07	7.11	7.65	8.22	8.75	10.25
	12H	11.98	12.49	13.10	13.59	15.11	7.14	7.65	8.26	8.75	10.27
4H	2H	9.18	9.79	10.28	10.88	12.37	5.71	6.32	6.81	7.41	8.90
	3H	10.97	11.49	12.09	12.60	14.10	7.03	7.54	8.14	8.65	10.15
	4H	11.65	12.12	12.76	13.22	14.74	7.56	8.03	8.67	9.13	10.65
	6H	12.14	12.54	13.26	13.66	15.18	7.95	8.35	9.07	9.48	10.99
	8H	12.30	12.68	13.42	13.79	15.32	8.07	8.44	9.19	9.56	11.09
	12H	12.38	12.72	13.52	13.85	15.38	8.12	8.46	9.26	9.58	11.12
8H	4H	11.60	11.98	12.72	13.09	14.63	7.82	8.19	8.94	9.31	10.84
	6H	12.14	12.45	13.29	13.61	15.14	8.31	8.62	9.45	9.78	11.30
	8H	12.35	12.62	13.50	13.76	15.30	8.48	8.75	9.63	9.89	11.44
	12H	12.47	12.70	13.62	13.84	15.42	8.58	8.82	9.74	9.96	11.54
12H	4H	11.55	11.89	12.69	13.02	14.55	7.81	8.15	8.95	9.28	10.82
	6H	12.12	12.39	13.27	13.53	15.07	8.35	8.62	9.50	9.76	11.31
	8H	12.32	12.56	13.47	13.69	15.28	8.54	8.78	9.69	9.91	11.50