

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P914438

Luminaire Tested: DFN2DIP-SQ2F0-050D050US927-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P914438
REPORT IS A COMBINATION OF REPORTS P899800 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-050D050US927-RLLFLL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6872.2 lumens
Efficiency: N/A
Efficacy: 84.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 81.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P914438

CATALOG NUMBER: DFN2DIP-SQ2F0-050D050US927-RLLFLL

Luminous Intensity Polar Plot

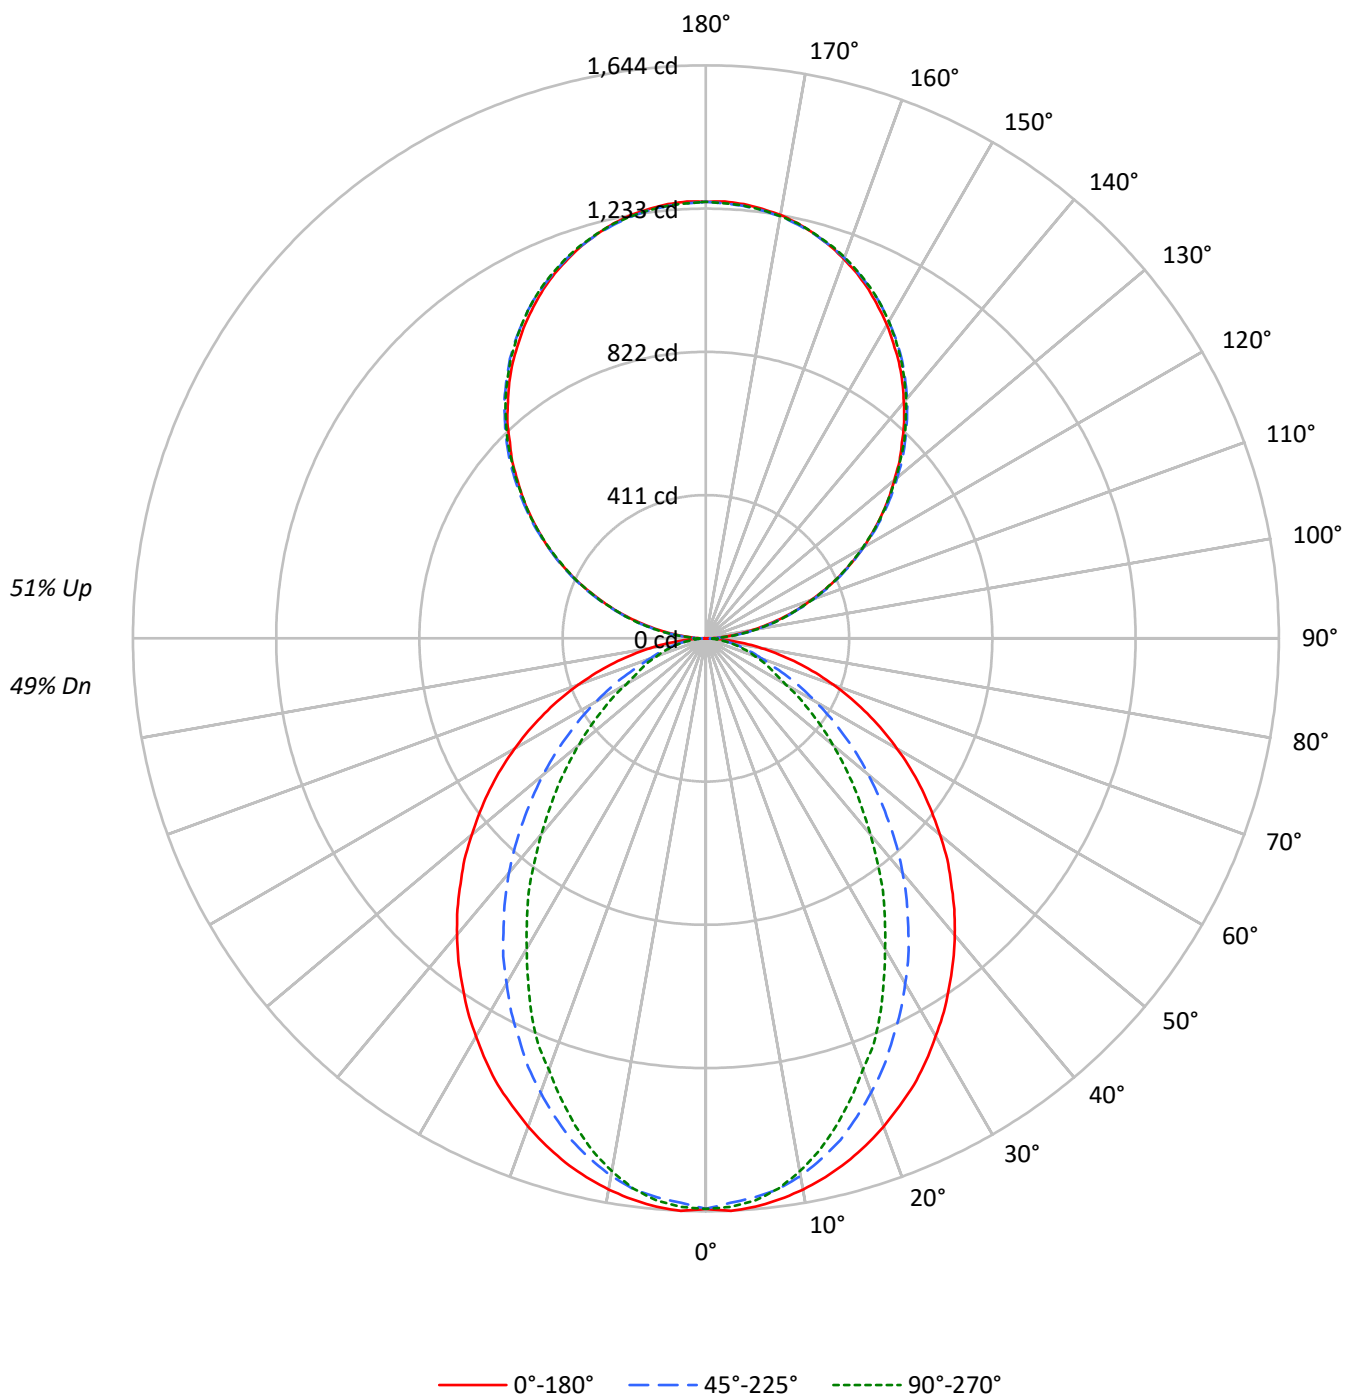

TEST NUMBER: P914438

CATALOG NUMBER: DFN2DIP-SQ2F0-050D050US927-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3600	3600	3600
5°	3599	3535	3560
10°	3557	3458	3439
15°	3502	3336	3256
20°	3431	3171	3032
25°	3358	2988	2816
30°	3263	2801	2544
35°	3169	2600	2305
40°	3073	2393	2032
45°	2962	2165	1785
50°	2847	1936	1544
55°	2726	1691	1313
60°	2586	1437	1075
65°	2424	1180	963
70°	2229	940	864
75°	1982	813	776
80°	1627	661	657
85°	1060	410	467

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2962 cd/sqm

TEST NUMBER: P914438

CATALOG NUMBER: DFN2DIP-SQ2F0-050D050US927-RLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	153.4	2.2
10°-20°	421.2	6.1
20°-30°	591.3	8.6
30°-40°	644.6	9.4
40°-50°	592.4	8.6
50°-60°	465.3	6.8
60°-70°	302.9	4.4
70°-80°	155.9	2.3
80°-90°	43.4	0.6
90°-100°	77.5	1.1
100°-110°	246.3	3.6
110°-120°	421.5	6.1
120°-130°	554.3	8.1
130°-140°	622.2	9.1
140°-150°	610.1	8.9
150°-160°	511.8	7.4
160°-170°	339.4	4.9
170°-180°	118.6	1.7
0°-30°	1165.9	17.0
0°-40°	1810.5	26.3
0°-60°	2868.2	41.7
0°-90°	3370.3	49.0
90°-120°	745.3	10.8
90°-150°	2532.0	36.8
90°-180°	3502.0	51.0
0°-180°	6872.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1637	1637	1637	1637	1637	
5°	1637	1630	1610	1624	1619	155
15°	1557	1541	1490	1462	1448	439
25°	1413	1366	1268	1207	1185	650
35°	1218	1142	1012	918	886	762
45°	996	896	741	636	600	769
55°	757	641	481	393	364	676
65°	511	391	258	208	203	507
75°	273	169	118	108	107	288
85°	64	33	28	28	28	73
90°	1	14	37	35	36	7
95°	55	66	68	68	66	61
105°	227	230	233	234	234	240
115°	423	429	427	426	423	418
125°	615	625	622	618	617	550
135°	796	807	810	809	806	615
145°	966	974	980	981	977	604
155°	1105	1108	1111	1116	1113	508
165°	1202	1201	1201	1208	1203	339
175°	1250	1247	1245	1253	1246	119
180°	1253	1253	1253	1253	1253	

TEST NUMBER: P914438

CATALOG NUMBER: DFN2DIP-SQ2F0-050D050US927-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1637.0	1637.0	1637.0	1637.0	1637.0
2.5°	1644.4	1637.0	1620.7	1635.6	1632.6
5°	1637.0	1629.7	1610.3	1623.7	1619.3
7.5°	1623.7	1614.9	1594.1	1600.0	1592.5
10°	1605.9	1595.5	1566.0	1561.5	1552.6
12.5°	1583.7	1570.4	1530.3	1521.5	1505.1
15°	1557.0	1540.7	1490.4	1462.3	1447.5
17.5°	1525.9	1502.2	1439.9	1407.4	1383.6
20°	1490.4	1460.7	1386.6	1349.7	1317.0
22.5°	1451.9	1417.8	1331.8	1281.5	1259.3
25°	1413.3	1365.9	1268.1	1207.4	1185.1
27.5°	1367.5	1317.0	1208.9	1139.2	1105.2
30°	1318.6	1262.2	1143.7	1068.2	1028.1
32.5°	1271.1	1202.9	1081.6	992.6	955.5
35°	1217.8	1142.2	1011.9	918.5	885.9
37.5°	1165.9	1084.4	946.7	844.4	807.5
40°	1111.1	1022.3	878.4	773.3	734.8
42.5°	1054.9	960.0	810.4	700.7	663.8
45°	995.6	896.3	740.8	635.5	599.9
47.5°	939.3	834.2	674.1	568.9	536.3
50°	877.1	771.9	608.9	506.6	475.6
52.5°	816.3	705.1	546.7	448.9	420.8
55°	757.0	641.4	481.4	392.6	364.5
57.5°	696.3	577.8	423.7	340.8	317.0
60°	634.1	515.6	362.9	287.5	263.7
62.5°	573.4	454.9	311.1	240.0	228.2
65°	511.1	391.1	257.8	207.5	203.0
67.5°	451.9	331.8	207.5	182.2	177.8
70°	389.7	274.1	171.8	157.0	151.1
72.5°	330.4	220.7	143.7	131.9	128.9
75°	272.6	168.8	118.5	108.1	106.7
77.5°	214.8	119.9	93.4	87.4	84.4
80°	161.4	86.0	71.1	65.2	65.2
82.5°	112.6	57.8	48.9	45.9	45.9
85°	63.7	32.6	28.1	28.1	28.1
87.5°	23.8	11.8	11.8	10.4	10.4
90°	1.1	13.6	37.0	34.8	35.9
92.5°	23.4	31.7	32.9	34.0	34.0
95°	55.1	65.8	67.6	67.6	65.8
97.5°	91.7	101.6	105.8	105.8	105.8
100°	134.0	142.8	145.8	145.8	144.7
102.5°	178.6	185.1	189.2	190.4	189.2
105°	227.4	230.4	232.7	234.5	234.5
107.5°	275.7	280.2	280.2	281.0	275.7
110°	322.5	328.6	328.6	328.6	325.5

TEST NUMBER: P914438

CATALOG NUMBER: DFN2DIP-SQ2F0-050D050US927-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	373.1	379.5	378.4	375.4	373.1
115°	422.9	429.0	427.1	426.0	422.9
117.5°	472.5	480.8	475.5	472.5	469.4
120°	522.3	530.6	522.3	522.3	518.9
122.5°	567.6	578.2	572.9	569.9	567.6
125°	615.2	624.6	621.6	618.2	617.1
127.5°	661.6	673.4	669.2	664.6	661.6
130°	705.1	718.7	716.8	714.5	710.3
132.5°	753.8	764.4	765.2	759.9	756.8
135°	795.7	807.4	809.7	808.6	805.6
137.5°	842.6	852.0	853.9	853.1	848.6
140°	883.7	893.2	898.4	898.4	894.3
142.5°	926.0	935.5	938.5	939.6	935.5
145°	966.1	973.6	979.6	980.8	976.6
147.5°	1002.0	1011.4	1015.9	1017.8	1013.6
150°	1038.9	1045.4	1049.5	1052.9	1049.5
152.5°	1071.8	1078.2	1083.5	1087.7	1083.5
155°	1104.6	1107.6	1111.0	1116.3	1112.9
157.5°	1133.0	1135.2	1137.1	1144.7	1139.4
160°	1158.2	1160.5	1161.7	1168.1	1163.6
162.5°	1181.7	1181.7	1182.8	1190.0	1184.7
165°	1201.7	1200.6	1200.6	1208.2	1202.8
167.5°	1219.8	1216.4	1216.4	1224.0	1218.7
170°	1233.4	1230.4	1229.3	1236.8	1230.4
172.5°	1242.9	1239.8	1238.7	1246.3	1239.8
175°	1250.5	1247.4	1245.2	1252.7	1246.3
177.5°	1254.6	1251.6	1249.3	1255.7	1249.3
180°	1252.7	1252.7	1252.7	1252.7	1252.7

TEST NUMBER: P914438

CATALOG NUMBER: DFN2DIP-SQ2F0-050D050US927-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.39	12.21	12.36	13.19	14.48	7.35	8.17	8.32	9.16	10.44
	3H	13.05	13.78	14.03	14.77	16.08	8.52	9.26	9.50	10.25	11.56
	4H	13.64	14.34	14.64	15.33	16.65	8.96	9.65	9.95	10.65	11.97
	6H	14.05	14.69	15.06	15.69	17.02	9.26	9.90	10.27	10.90	12.23
	8H	14.17	14.77	15.18	15.79	17.12	9.34	9.95	10.36	10.97	12.29
	12H	14.22	14.80	15.24	15.81	17.16	9.38	9.96	10.40	10.97	12.32
4H	2H	11.40	12.10	12.41	13.09	14.41	7.94	8.63	8.94	9.62	10.94
	3H	13.21	13.79	14.22	14.81	16.14	9.26	9.84	10.27	10.86	12.20
	4H	13.89	14.41	14.90	15.43	16.78	9.80	10.32	10.81	11.34	12.69
	6H	14.38	14.83	15.41	15.87	17.23	10.19	10.65	11.22	11.69	13.04
	8H	14.55	14.97	15.58	16.00	17.37	10.31	10.74	11.34	11.77	13.13
	12H	14.63	15.01	15.68	16.06	17.43	10.37	10.75	11.41	11.80	13.17
8H	4H	13.85	14.27	14.88	15.30	16.67	10.06	10.49	11.09	11.52	12.88
	6H	14.39	14.74	15.45	15.82	17.18	10.56	10.91	11.61	11.98	13.34
	8H	14.60	14.90	15.66	15.96	17.34	10.73	11.04	11.80	12.10	13.48
	12H	14.72	14.99	15.78	16.04	17.47	10.84	11.11	11.90	12.16	13.59
12H	4H	13.80	14.18	14.85	15.23	16.60	10.06	10.45	11.11	11.49	12.86
	6H	14.37	14.67	15.43	15.73	17.11	10.60	10.91	11.66	11.97	13.35
	8H	14.57	14.84	15.64	15.90	17.32	10.79	11.07	11.86	12.12	13.54