

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P917117

Luminaire Tested: DFN2DIP-SQ2F0-030D050US930-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P917117
REPORT IS A COMBINATION OF REPORTS P901315 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-030D050US930-FLLONL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 6457.2 lumens
Efficiency: N/A
Efficacy: 106.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 60.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P917117

CATALOG NUMBER: DFN2DIP-SQ2F0-030D050US930-FLLONL

Luminous Intensity Polar Plot

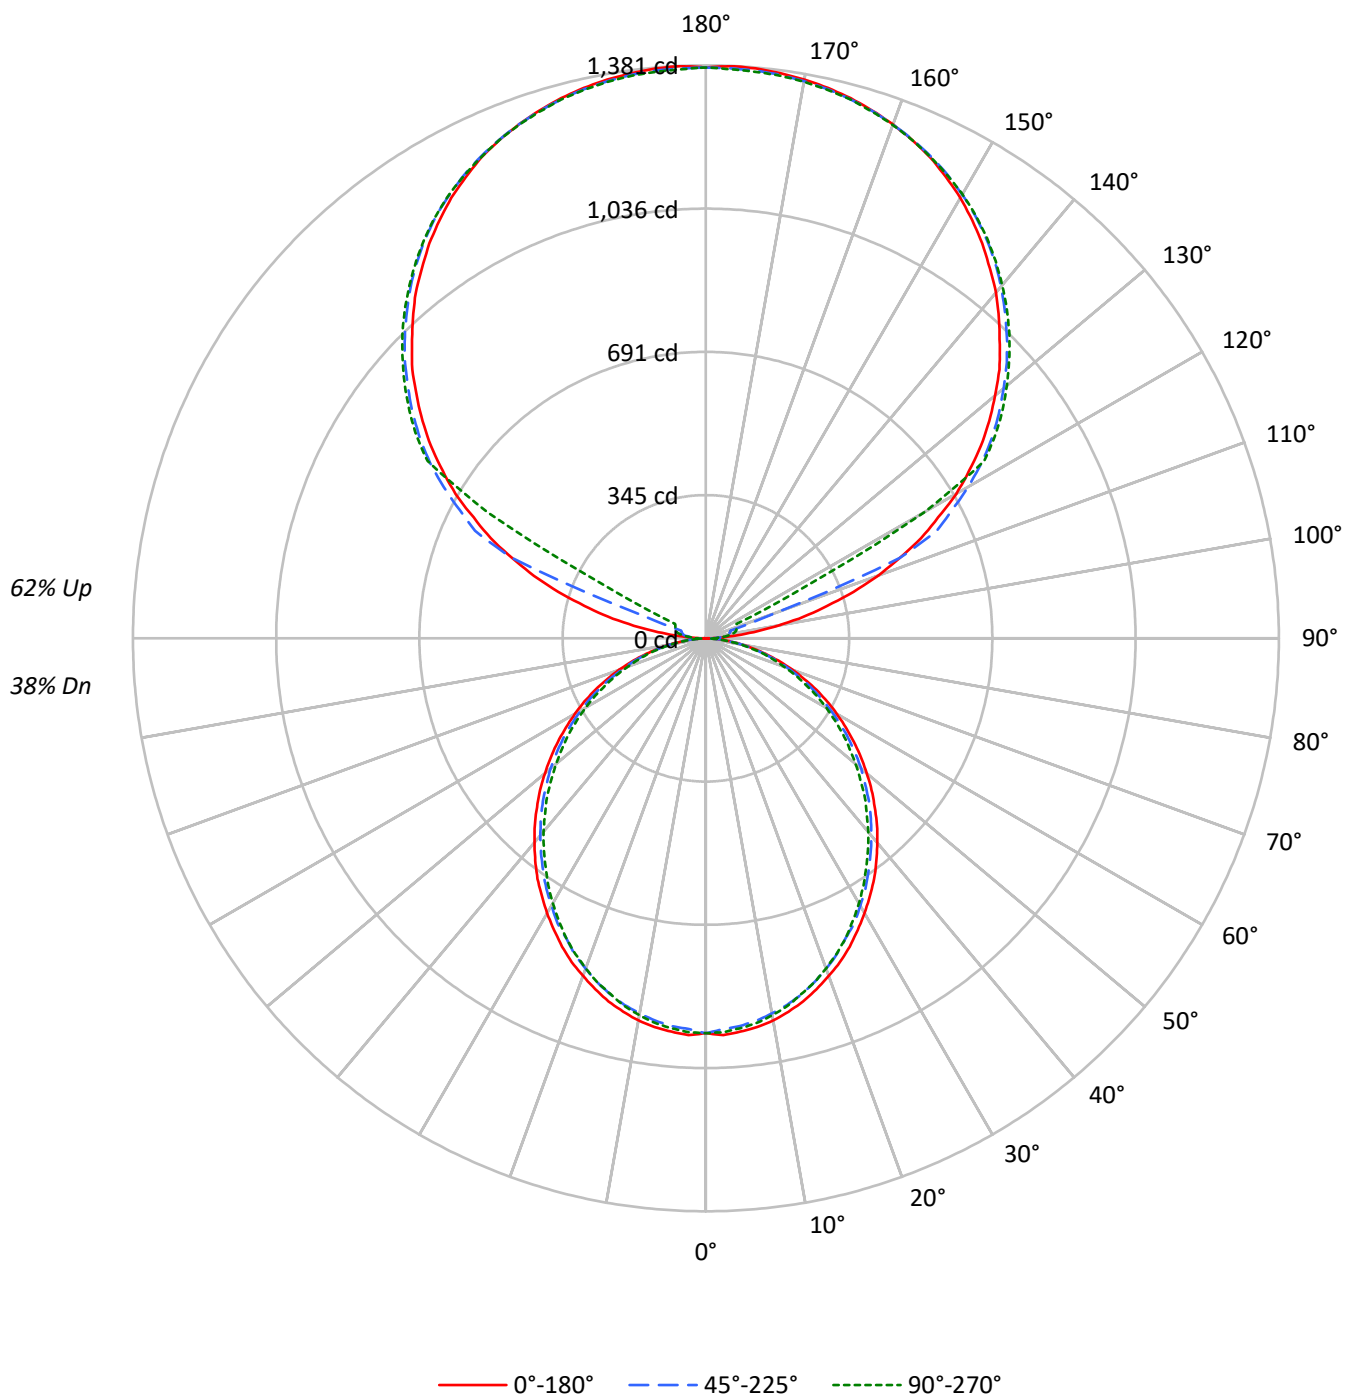

TEST NUMBER: P917117

CATALOG NUMBER: DFN2DIP-SQ2F0-030D050US930-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	104	104	104	104	94	94	94	94	76	76	76	60	60	60	45	45	45
1	95	91	87	83	86	82	79	76	67	65	63	53	51	50	39	39	38
2	86	79	73	68	78	72	67	63	59	55	52	46	44	42	35	33	32
3	79	70	62	57	71	63	57	52	52	47	44	41	38	35	31	29	27
4	72	62	54	48	65	56	49	44	46	41	37	36	33	30	27	25	23
5	66	55	47	41	60	50	43	38	41	36	32	33	29	26	25	22	20
6	61	49	41	35	55	45	38	33	37	32	28	29	26	23	22	20	18
7	56	44	36	31	51	40	34	29	33	28	24	27	23	20	20	18	16
8	52	40	32	27	47	37	30	25	30	25	22	24	21	18	19	16	14
9	48	36	29	24	44	33	27	23	28	23	19	22	19	16	17	15	13
10	45	33	26	22	41	31	24	20	26	21	17	21	17	14	16	13	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2093	2093	2093
5°	2092	2059	2074
10°	2072	2027	2043
15°	2038	1989	1997
20°	1993	1938	1949
25°	1948	1878	1894
30°	1893	1822	1825
35°	1841	1756	1752
40°	1777	1690	1683
45°	1713	1624	1612
50°	1643	1553	1530
55°	1569	1472	1454
60°	1485	1377	1366
65°	1394	1278	1264
70°	1277	1156	1152
75°	1117	1010	1045
80°	923	824	849
85°	624	520	532

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 1713 cd/sqm

TEST NUMBER: P917117

CATALOG NUMBER: DFN2DIP-SQ2F0-030D050US930-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.6	1.4
10°-20°	252.0	3.9
20°-30°	370.4	5.7
30°-40°	430.2	6.7
40°-50°	429.7	6.7
50°-60°	374.6	5.8
60°-70°	277.0	4.3
70°-80°	156.7	2.4
80°-90°	43.8	0.7
90°-100°	45.4	0.7
100°-110°	169.1	2.6
110°-120°	448.5	6.9
120°-130°	743.9	11.5
130°-140°	790.2	12.2
140°-150°	734.4	11.4
150°-160°	590.4	9.1
160°-170°	380.5	5.9
170°-180°	130.9	2.0
0°-30°	712.0	11.0
0°-40°	1142.2	17.7
0°-60°	1946.5	30.1
0°-90°	2423.9	37.5
90°-120°	663.0	10.3
90°-150°	2931.5	45.4
90°-180°	4033.0	62.5
0°-180°	6457.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	952	952	952	952	952	
5°	952	948	938	945	944	90
15°	906	901	889	892	888	255
25°	820	813	797	799	797	377
35°	707	698	684	678	674	442
45°	576	569	556	545	542	444
55°	436	430	419	408	404	390
65°	294	288	279	271	266	290
75°	154	152	147	142	144	164
85°	38	37	36	33	32	42
90°	1	12	20	25	27	6
95°	65	32	39	44	43	77
105°	303	333	61	72	76	323
115°	572	589	614	153	82	564
125°	809	822	841	848	851	722
135°	1002	1018	1026	1036	1034	774
145°	1162	1161	1178	1185	1180	727
155°	1279	1270	1282	1288	1280	589
165°	1348	1342	1345	1352	1345	381
175°	1379	1372	1374	1381	1371	131
180°	1376	1376	1376	1376	1376	

TEST NUMBER: P917117

CATALOG NUMBER: DFN2DIP-SQ2F0-030D050US930-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	951.7	951.7	951.7	951.7	951.7
2.5°	957.2	952.7	942.6	951.7	950.0
5°	951.7	948.1	938.0	945.3	943.5
7.5°	945.3	939.9	929.8	937.2	935.3
10°	935.3	928.9	917.9	925.2	922.5
12.5°	921.5	916.1	905.1	909.6	907.8
15°	906.0	900.6	888.6	892.3	887.7
17.5°	886.7	881.3	869.4	873.9	869.4
20°	865.7	860.2	847.4	850.1	846.5
22.5°	844.7	836.5	824.5	824.5	822.6
25°	819.9	812.7	797.1	798.9	797.1
27.5°	792.5	786.0	774.2	771.5	767.0
30°	765.1	757.7	744.0	741.3	737.6
32.5°	735.8	730.3	715.7	710.1	706.5
35°	707.4	698.3	683.6	678.1	673.5
37.5°	675.4	667.2	652.5	646.0	641.5
40°	642.5	635.1	620.4	612.3	608.6
42.5°	610.4	603.1	588.5	579.3	573.8
45°	575.7	569.2	555.5	545.4	541.8
47.5°	541.8	535.4	520.7	510.6	505.2
50°	506.1	501.5	488.7	475.9	471.3
52.5°	471.3	464.9	453.1	443.0	436.5
55°	435.7	430.2	419.1	408.2	403.7
57.5°	399.9	395.3	383.4	372.4	368.8
60°	364.2	360.6	347.8	337.7	335.0
62.5°	329.5	323.0	313.9	304.8	301.1
65°	293.8	288.3	279.2	270.9	266.4
67.5°	257.2	252.6	244.3	238.0	234.3
70°	223.3	219.6	211.4	205.0	201.4
72.5°	188.6	184.8	180.3	173.9	171.2
75°	153.7	152.0	147.3	141.9	143.7
77.5°	122.6	119.0	117.1	114.4	111.7
80°	91.6	90.6	88.7	86.0	84.2
82.5°	62.2	62.2	61.4	57.6	57.6
85°	37.5	36.6	35.7	32.9	32.0
87.5°	16.5	14.7	12.8	10.1	9.1
90°	1.0	11.9	19.9	24.9	26.8
92.5°	24.9	21.0	23.9	25.9	26.8
95°	64.7	31.8	38.8	43.9	42.8
97.5°	116.4	34.9	50.7	53.8	54.7
100°	176.3	39.9	56.7	64.7	66.7
102.5°	241.9	239.9	58.8	69.6	72.7
105°	302.6	332.6	60.7	71.7	75.7
107.5°	373.3	398.1	62.8	73.6	77.7
110°	441.1	461.9	174.2	74.7	78.6

TEST NUMBER: P917117

CATALOG NUMBER: DFN2DIP-SQ2F0-030D050US930-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	504.8	522.6	505.7	76.6	79.7
115°	572.4	589.3	614.2	153.4	81.7
117.5°	631.1	651.0	668.1	525.5	264.8
120°	696.8	711.8	729.7	741.7	607.2
122.5°	752.5	768.5	788.5	794.4	795.5
125°	809.3	822.3	841.2	848.2	851.2
127.5°	861.0	875.0	890.1	899.9	900.9
130°	909.9	925.9	936.7	947.7	946.8
132.5°	959.7	972.7	983.5	992.5	991.6
135°	1001.5	1017.5	1026.3	1036.4	1034.4
137.5°	1045.2	1057.2	1067.2	1077.2	1074.2
140°	1088.0	1096.1	1106.9	1115.9	1111.0
142.5°	1124.0	1131.0	1143.9	1151.8	1146.8
145°	1161.8	1160.7	1177.6	1184.6	1179.7
147.5°	1194.6	1191.6	1208.5	1213.5	1209.6
150°	1226.5	1219.5	1235.4	1241.4	1236.4
152.5°	1253.3	1245.4	1260.3	1266.3	1259.3
155°	1279.2	1270.3	1282.2	1288.2	1280.3
157.5°	1300.1	1292.2	1301.1	1308.1	1300.1
160°	1318.1	1312.1	1318.1	1324.0	1317.0
162.5°	1333.9	1328.0	1332.9	1339.9	1331.0
165°	1347.9	1342.0	1344.9	1351.8	1344.9
167.5°	1358.9	1352.8	1355.9	1362.9	1353.9
170°	1367.8	1361.8	1363.8	1370.8	1361.8
172.5°	1373.8	1367.8	1369.9	1376.8	1367.8
175°	1378.8	1371.7	1373.8	1380.7	1370.8
177.5°	1380.7	1373.8	1374.8	1381.8	1372.8
180°	1375.7	1375.7	1375.7	1375.7	1375.7

TEST NUMBER: P917117

CATALOG NUMBER: DFN2DIP-SQ2F0-030D050US930-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.45	9.21	9.50	10.27	11.71	8.00	8.76	9.06	9.82	11.26
	3H	10.08	10.76	11.15	11.83	13.29	9.59	10.27	10.66	11.34	12.80
	4H	10.65	11.30	11.73	12.37	13.83	10.16	10.80	11.23	11.87	13.34
	6H	11.03	11.62	12.12	12.70	14.17	10.53	11.12	11.62	12.20	13.68
	8H	11.12	11.69	12.22	12.78	14.25	10.62	11.19	11.71	12.28	13.75
	12H	11.16	11.70	12.26	12.78	14.28	10.65	11.19	11.75	12.27	13.77
4H	2H	8.88	9.53	9.97	10.60	12.06	8.53	9.17	9.61	10.25	11.71
	3H	10.72	11.26	11.81	12.36	13.83	10.31	10.85	11.40	11.95	13.42
	4H	11.41	11.91	12.51	13.00	14.49	10.99	11.48	12.09	12.57	14.07
	6H	11.90	12.33	13.01	13.44	14.93	11.47	11.90	12.58	13.01	14.50
	8H	12.04	12.44	13.15	13.54	15.05	11.60	12.00	12.71	13.10	14.61
	12H	12.10	12.46	13.22	13.58	15.09	11.65	12.01	12.77	13.13	14.64
8H	4H	11.59	11.99	12.69	13.09	14.60	11.21	11.61	12.32	12.71	14.22
	6H	12.19	12.52	13.32	13.67	15.17	11.81	12.14	12.94	13.28	14.79
	8H	12.40	12.69	13.53	13.81	15.34	12.01	12.29	13.14	13.42	14.94
	12H	12.51	12.76	13.65	13.89	15.45	12.10	12.35	13.24	13.48	15.04
12H	4H	11.57	11.93	12.69	13.04	14.56	11.20	11.56	12.32	12.67	14.19
	6H	12.22	12.50	13.35	13.63	15.15	11.84	12.13	12.98	13.26	14.78
	8H	12.44	12.69	13.58	13.81	15.37	12.06	12.31	13.19	13.43	14.99