

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P919978

Luminaire Tested: DFN2DIP-SQ2F0-080D080US935-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P919978
REPORT IS A COMBINATION OF REPORTS P899842 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-080D080US935-RLLFLL
Description: 2 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11950.7 lumens
Efficiency: N/A
Efficacy: 83.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 143.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9957
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P919978

CATALOG NUMBER: DFN2DIP-SQ2F0-080D080US935-RLLFLL

Luminous Intensity Polar Plot

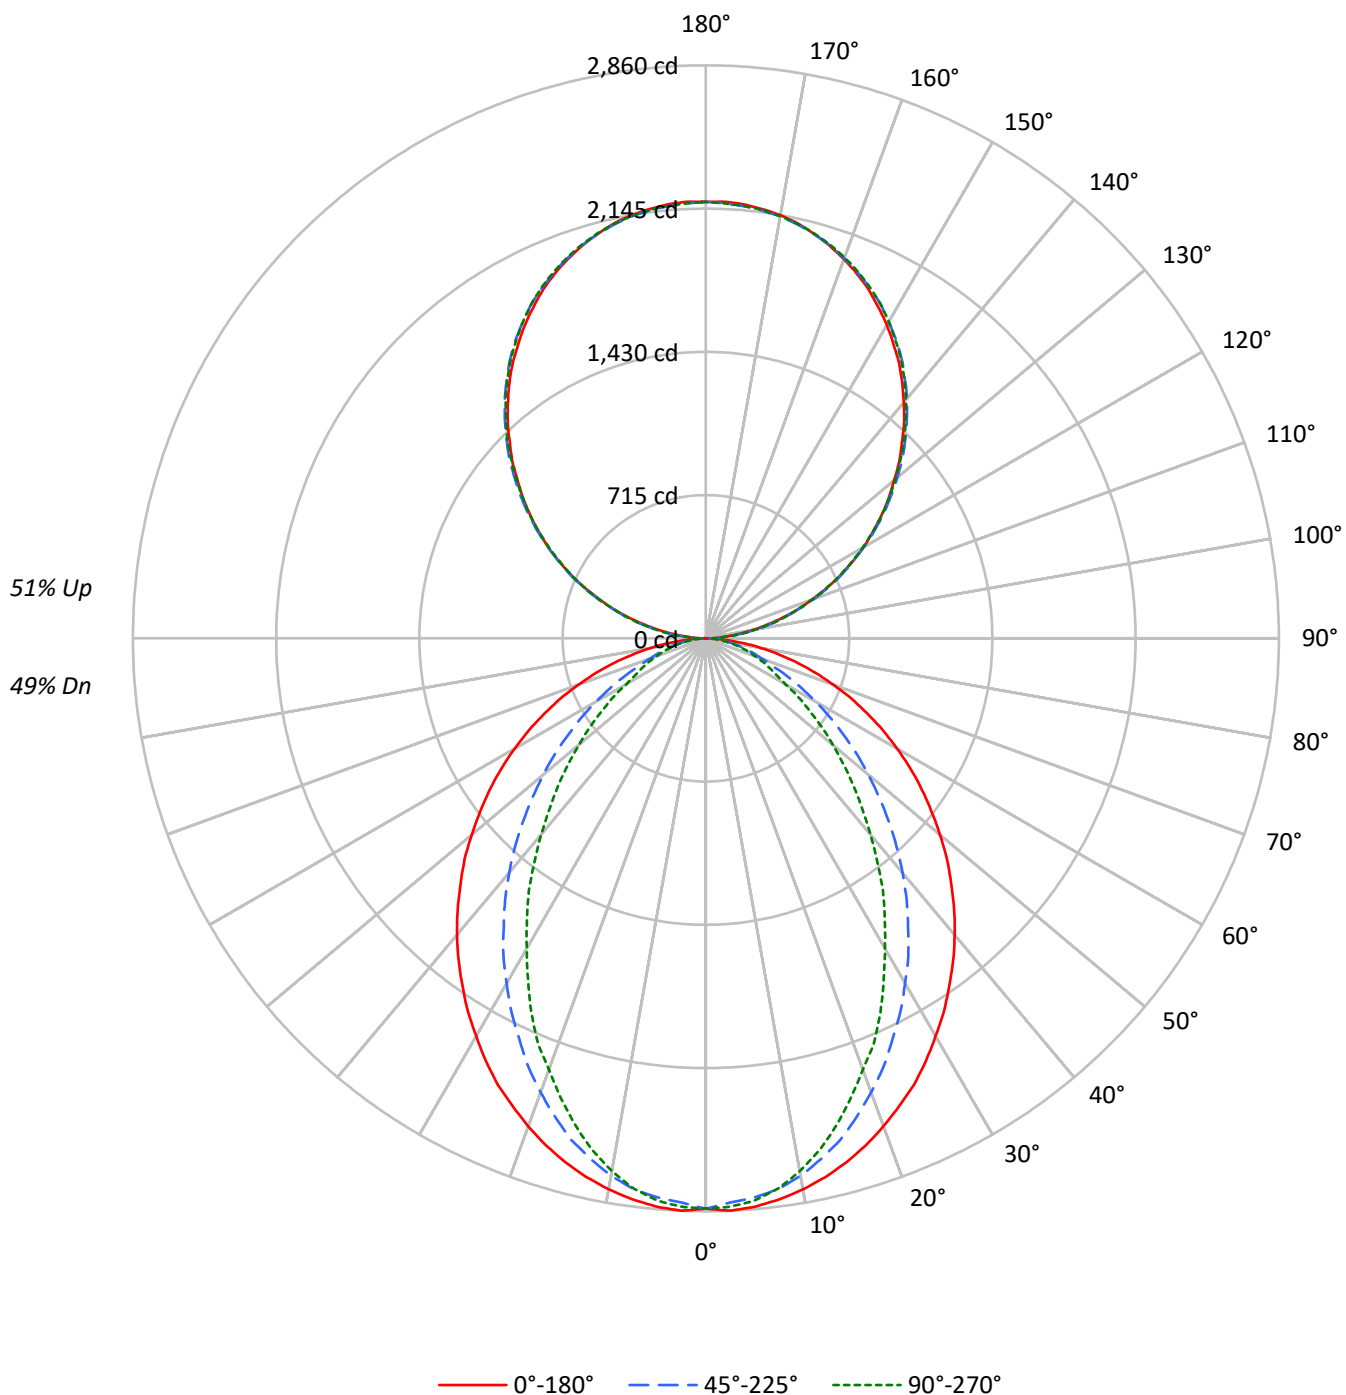

TEST NUMBER: P919978

CATALOG NUMBER: DFN2DIP-SQ2F0-080D080US935-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	6260	6260	6260
5°	6259	6147	6191
10°	6186	6013	5981
15°	6090	5801	5662
20°	5967	5514	5273
25°	5840	5196	4897
30°	5674	4870	4424
35°	5511	4521	4008
40°	5344	4162	3534
45°	5151	3765	3104
50°	4951	3366	2685
55°	4741	2941	2283
60°	4497	2499	1871
65°	4216	2051	1673
70°	3875	1634	1502
75°	3446	1414	1349
80°	2829	1149	1143
85°	1842	713	813

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
Vertical Angle: 45°
Luminance: 5151 cd/sqm

TEST NUMBER: P919978

CATALOG NUMBER: DFN2DIP-SQ2F0-080D080US935-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	266.8	2.2
10°-20°	732.4	6.1
20°-30°	1028.3	8.6
30°-40°	1120.9	9.4
40°-50°	1030.3	8.6
50°-60°	809.1	6.8
60°-70°	526.6	4.4
70°-80°	271.1	2.3
80°-90°	75.4	0.6
90°-100°	134.8	1.1
100°-110°	428.3	3.6
110°-120°	733.0	6.1
120°-130°	964.0	8.1
130°-140°	1082.0	9.1
140°-150°	1061.0	8.9
150°-160°	890.1	7.4
160°-170°	590.3	4.9
170°-180°	206.3	1.7
0°-30°	2027.6	17.0
0°-40°	3148.5	26.3
0°-60°	4987.8	41.7
0°-90°	5861.0	49.0
90°-120°	1296.1	10.8
90°-150°	4403.1	36.8
90°-180°	6090.0	51.0
0°-180°	11950.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2847	2847	2847	2847	2847	
5°	2847	2834	2800	2824	2816	270
15°	2708	2679	2592	2543	2517	763
25°	2458	2375	2205	2100	2061	1130
35°	2118	1986	1760	1597	1540	1326
45°	1731	1559	1288	1105	1043	1337
55°	1316	1116	837	683	634	1176
65°	889	680	448	361	353	881
75°	474	294	206	188	186	501
85°	111	57	49	49	49	127
90°	2	24	64	60	62	12
95°	96	114	118	118	114	107
105°	395	401	405	408	408	417
115°	736	746	743	741	736	728
125°	1070	1086	1081	1075	1073	956
135°	1384	1404	1408	1406	1401	1070
145°	1680	1693	1704	1706	1698	1050
155°	1921	1926	1932	1941	1935	884
165°	2090	2088	2088	2101	2092	590
175°	2174	2169	2165	2178	2167	207
180°	2178	2178	2178	2178	2178	

TEST NUMBER: P919978

CATALOG NUMBER: DFN2DIP-SQ2F0-080D080US935-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2846.8	2846.8	2846.8	2846.8	2846.8
2.5°	2859.6	2846.8	2818.4	2844.3	2839.1
5°	2846.8	2834.0	2800.3	2823.6	2815.9
7.5°	2823.6	2808.2	2772.2	2782.3	2769.4
10°	2792.6	2774.7	2723.3	2715.3	2700.0
12.5°	2754.2	2730.9	2661.2	2645.8	2617.4
15°	2707.7	2679.3	2591.8	2542.9	2517.1
17.5°	2653.5	2612.3	2504.0	2447.5	2406.1
20°	2591.8	2540.1	2411.4	2347.2	2290.3
22.5°	2524.8	2465.5	2316.0	2228.5	2189.9
25°	2457.8	2375.3	2205.3	2099.8	2061.0
27.5°	2378.0	2290.3	2102.2	1981.2	1921.8
30°	2293.0	2194.9	1988.8	1857.6	1787.9
32.5°	2210.4	2091.9	1880.8	1726.1	1661.6
35°	2117.8	1986.3	1759.7	1597.4	1540.5
37.5°	2027.6	1885.8	1646.3	1468.3	1404.1
40°	1932.3	1777.8	1527.7	1344.8	1277.8
42.5°	1834.4	1669.6	1409.3	1218.6	1154.3
45°	1731.3	1558.6	1288.2	1105.1	1043.4
47.5°	1633.5	1450.6	1172.3	989.2	932.6
50°	1525.2	1342.4	1058.9	881.0	827.1
52.5°	1419.4	1226.1	950.6	780.7	731.8
55°	1316.4	1115.5	837.2	682.8	633.9
57.5°	1210.9	1004.8	736.9	592.6	551.3
60°	1102.6	896.6	631.1	499.9	458.7
62.5°	997.1	791.0	541.0	417.4	396.9
65°	888.9	680.0	448.2	360.8	352.8
67.5°	785.8	577.0	360.8	316.8	309.2
70°	677.6	476.7	298.8	273.0	262.7
72.5°	574.5	383.7	249.9	229.4	224.1
75°	474.0	293.6	206.1	188.0	185.6
77.5°	373.7	208.5	162.4	152.0	146.8
80°	280.7	149.6	123.6	113.4	113.4
82.5°	195.7	100.6	85.0	79.8	79.8
85°	110.7	56.6	48.9	48.9	48.9
87.5°	41.2	20.5	20.5	18.1	18.1
90°	2.0	23.7	64.4	60.4	62.4
92.5°	40.7	55.2	57.2	59.1	59.1
95°	95.9	114.3	117.5	117.5	114.3
97.5°	159.6	176.7	183.9	183.9	183.9
100°	233.2	248.2	253.5	253.5	251.5
102.5°	310.6	321.8	329.0	331.0	329.0
105°	395.4	400.6	404.6	407.9	407.9
107.5°	479.4	487.3	487.3	488.6	479.4
110°	560.9	571.4	571.4	571.4	566.1

TEST NUMBER: P919978

CATALOG NUMBER: DFN2DIP-SQ2F0-080D080US935-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	648.8	660.0	658.1	652.8	648.8
115°	735.6	746.1	742.8	740.8	735.6
117.5°	821.6	836.0	826.8	821.6	816.3
120°	908.3	922.7	908.3	908.3	902.3
122.5°	987.0	1005.5	996.3	991.0	987.0
125°	1069.8	1086.2	1081.0	1075.0	1073.1
127.5°	1150.6	1171.0	1163.7	1155.9	1150.6
130°	1226.1	1249.7	1246.5	1242.6	1235.4
132.5°	1310.9	1329.2	1330.6	1321.4	1316.1
135°	1383.7	1404.1	1408.1	1406.1	1400.8
137.5°	1465.2	1481.6	1484.9	1483.6	1475.7
140°	1536.8	1553.2	1562.4	1562.4	1555.1
142.5°	1610.3	1626.8	1632.0	1634.0	1626.8
145°	1680.0	1693.1	1703.6	1705.6	1698.3
147.5°	1742.3	1758.8	1766.6	1770.0	1762.7
150°	1806.7	1817.8	1825.1	1831.0	1825.1
152.5°	1863.8	1875.0	1884.2	1891.4	1884.2
155°	1921.0	1926.2	1932.2	1941.3	1935.4
157.5°	1970.2	1974.2	1977.5	1990.5	1981.4
160°	2014.2	2018.2	2020.2	2031.3	2023.4
162.5°	2054.9	2054.9	2056.9	2069.4	2060.2
165°	2089.7	2087.7	2087.7	2100.9	2091.7
167.5°	2121.2	2115.4	2115.4	2128.5	2119.3
170°	2144.9	2139.7	2137.7	2150.9	2139.7
172.5°	2161.4	2156.1	2154.1	2167.2	2156.1
175°	2174.5	2169.2	2165.2	2178.4	2167.2
177.5°	2181.7	2176.4	2172.5	2183.7	2172.5
180°	2178.4	2178.4	2178.4	2178.4	2178.4

TEST NUMBER: P919978

CATALOG NUMBER: DFN2DIP-SQ2F0-080D080US935-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.31	14.14	14.28	15.12	16.40	9.27	10.10	10.25	11.08	12.36
	3H	14.97	15.71	15.95	16.70	18.01	10.44	11.18	11.43	12.17	13.48
	4H	15.57	16.26	16.56	17.25	18.57	10.88	11.58	11.88	12.57	13.89
	6H	15.97	16.61	16.98	17.61	18.94	11.18	11.82	12.19	12.82	14.15
	8H	16.09	16.70	17.10	17.71	19.04	11.27	11.87	12.28	12.89	14.22
	12H	16.14	16.72	17.16	17.73	19.08	11.30	11.88	12.32	12.89	14.24
4H	2H	13.32	14.02	14.33	15.01	16.33	9.86	10.55	10.86	11.55	12.86
	3H	15.13	15.71	16.14	16.73	18.06	11.19	11.76	12.20	12.79	14.12
	4H	15.81	16.34	16.83	17.35	18.71	11.72	12.25	12.74	13.26	14.62
	6H	16.30	16.76	17.33	17.80	19.15	12.12	12.57	13.15	13.61	14.96
	8H	16.47	16.89	17.50	17.92	19.29	12.23	12.66	13.27	13.69	15.06
	12H	16.55	16.93	17.60	17.98	19.35	12.29	12.67	13.34	13.72	15.09
8H	4H	15.77	16.19	16.80	17.23	18.59	11.99	12.41	13.02	13.44	14.81
	6H	16.31	16.66	17.37	17.74	19.10	12.48	12.83	13.53	13.90	15.27
	8H	16.52	16.83	17.58	17.88	19.27	12.66	12.96	13.72	14.02	15.40
	12H	16.64	16.91	17.71	17.97	19.39	12.76	13.03	13.82	14.08	15.51
12H	4H	15.72	16.10	16.77	17.15	18.52	11.99	12.37	13.04	13.42	14.79
	6H	16.29	16.60	17.35	17.65	19.04	12.52	12.83	13.58	13.89	15.27
	8H	16.49	16.76	17.56	17.82	19.24	12.72	12.99	13.78	14.04	15.47