

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922577

Luminaire Tested: DFN2DIP-SQ2F0-030D060US940-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922577
REPORT IS A COMBINATION OF REPORTS P901327 AND P898215
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-030D060US940-FLLONL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7945.1 lumens
Efficiency: N/A
Efficacy: 115.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 68.9
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922577

CATALOG NUMBER: DFN2DIP-SQ2F0-030D060US940-FLLONL

Luminous Intensity Polar Plot

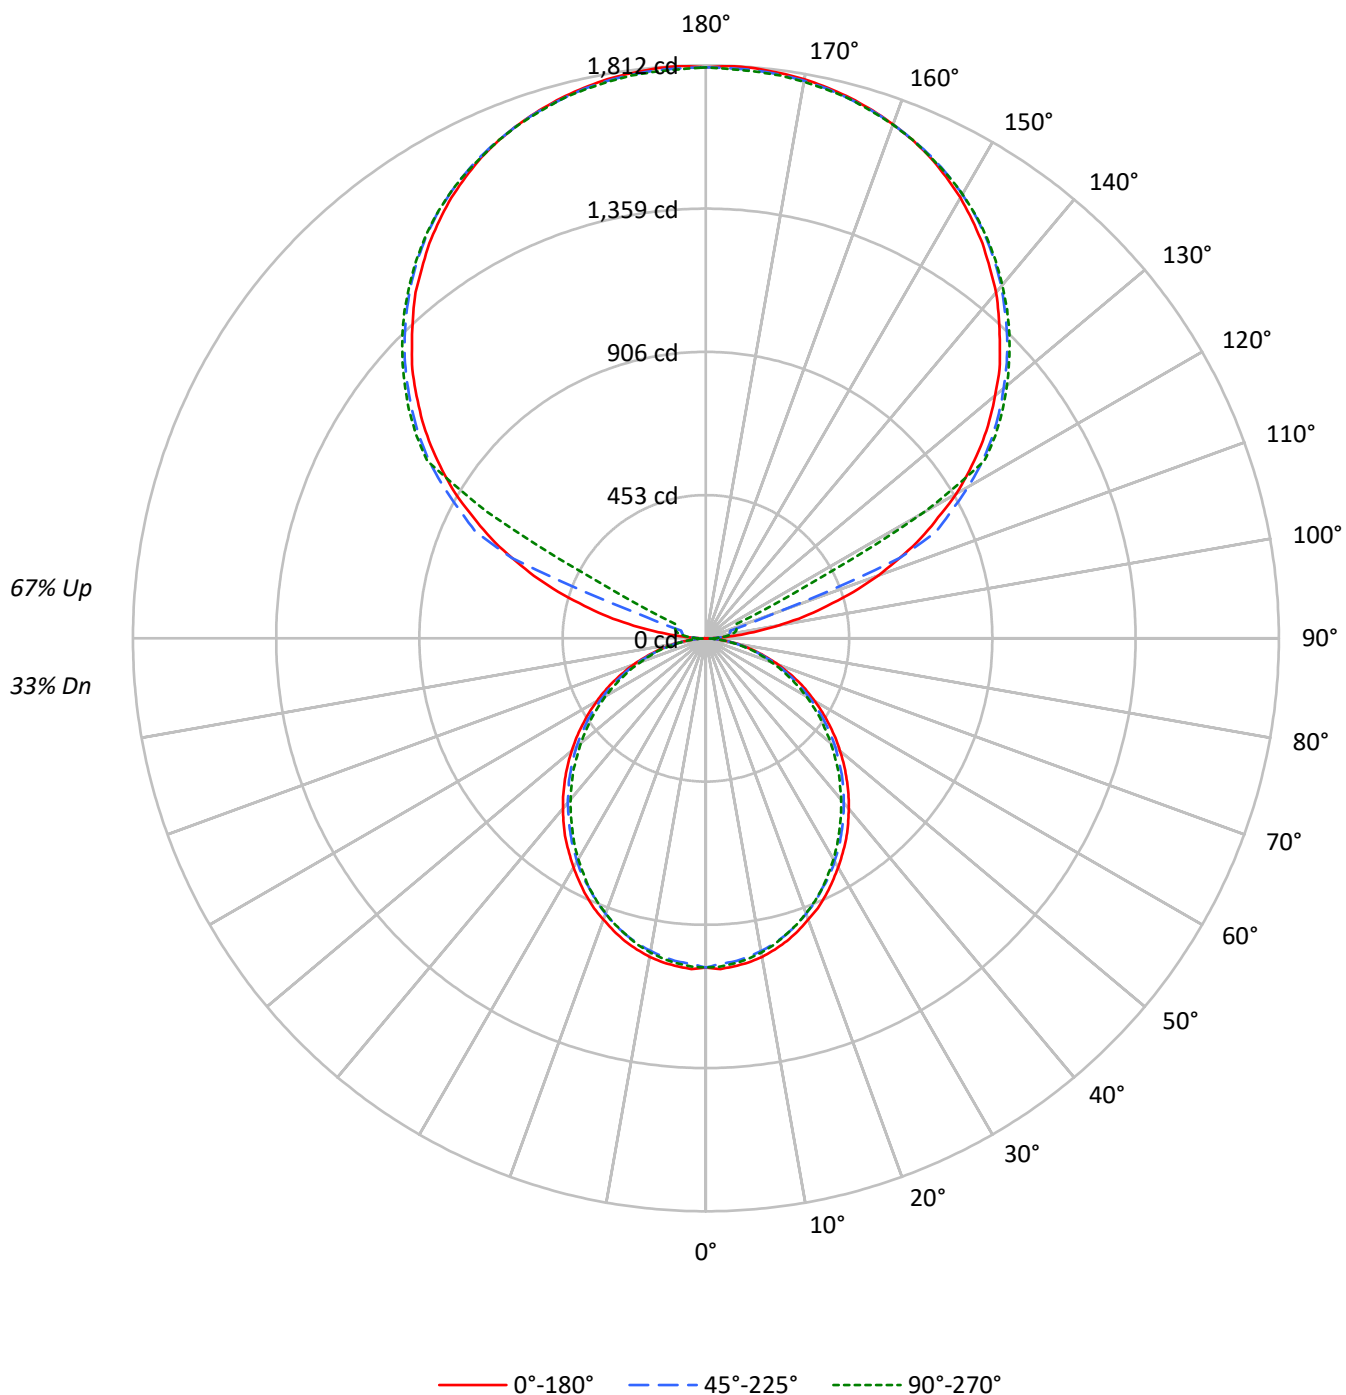

TEST NUMBER: P922577

CATALOG NUMBER: DFN2DIP-SQ2F0-030D060US940-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	78	72	67	77	71	66	62	57	53	50	44	41	39	32	30	29
3	78	69	62	56	70	62	56	51	50	46	42	39	36	33	28	26	25
4	71	61	53	47	64	55	49	43	44	40	36	34	31	28	25	23	21
5	65	54	46	40	59	49	42	37	40	35	31	31	27	25	23	20	18
6	60	48	41	35	54	44	37	32	36	31	27	28	24	21	20	18	16
7	56	44	36	30	50	40	33	28	32	27	23	25	22	19	19	16	14
8	51	39	32	27	46	36	29	25	29	24	21	23	19	17	17	15	13
9	48	36	29	24	43	33	26	22	27	22	19	21	18	15	16	13	12
10	45	33	26	21	40	30	24	20	25	20	17	19	16	14	15	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2289	2289	2289
5°	2289	2252	2269
10°	2266	2217	2235
15°	2229	2175	2184
20°	2180	2119	2132
25°	2131	2054	2072
30°	2071	1993	1996
35°	2013	1921	1917
40°	1943	1849	1841
45°	1873	1776	1763
50°	1797	1699	1673
55°	1716	1610	1590
60°	1624	1506	1494
65°	1524	1397	1382
70°	1397	1264	1260
75°	1222	1105	1143
80°	1009	902	928
85°	682	570	582

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1873 cd/sqm

TEST NUMBER: P922577

CATALOG NUMBER: DFN2DIP-SQ2F0-030D060US940-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	98.0	1.2
10°-20°	275.6	3.5
20°-30°	405.1	5.1
30°-40°	470.5	5.9
40°-50°	469.9	5.9
50°-60°	409.8	5.2
60°-70°	302.9	3.8
70°-80°	171.4	2.2
80°-90°	48.4	0.6
90°-100°	59.5	0.7
100°-110°	222.0	2.8
110°-120°	588.7	7.4
120°-130°	976.3	12.3
130°-140°	1037.1	13.1
140°-150°	963.9	12.1
150°-160°	774.9	9.8
160°-170°	499.3	6.3
170°-180°	171.9	2.2
0°-30°	778.7	9.8
0°-40°	1249.2	15.7
0°-60°	2128.9	26.8
0°-90°	2651.6	33.4
90°-120°	870.2	11.0
90°-150°	3847.4	48.4
90°-180°	5294.0	66.6
0°-180°	7945.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1041	1041	1041	1041	1041	
5°	1041	1037	1026	1034	1032	99
15°	991	985	972	976	971	279
25°	897	889	872	874	872	413
35°	774	764	748	742	737	483
45°	630	623	608	597	592	486
55°	476	470	458	446	442	426
65°	321	315	305	296	291	318
75°	168	166	161	155	157	179
85°	41	40	39	36	35	46
90°	1	16	26	33	35	7
95°	85	42	51	58	56	101
105°	397	436	80	94	99	424
115°	751	774	806	201	107	740
125°	1062	1079	1104	1113	1117	947
135°	1314	1335	1347	1360	1358	1015
145°	1525	1523	1546	1555	1548	954
155°	1679	1667	1683	1691	1680	774
165°	1769	1761	1765	1774	1765	500
175°	1810	1800	1803	1812	1799	172
180°	1806	1806	1806	1806	1806	

TEST NUMBER: P922577

CATALOG NUMBER: DFN2DIP-SQ2F0-030D060US940-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1040.9	1040.9	1040.9	1040.9	1040.9
2.5°	1047.0	1042.0	1030.9	1040.9	1039.0
5°	1040.9	1037.0	1025.9	1033.9	1032.0
7.5°	1033.9	1028.0	1016.9	1025.0	1023.0
10°	1023.0	1015.9	1004.0	1011.9	1009.0
12.5°	1007.9	1001.9	990.0	994.9	992.9
15°	990.9	985.0	971.9	975.9	970.9
17.5°	969.8	963.9	950.8	955.8	950.8
20°	946.8	940.8	926.8	929.8	925.9
22.5°	923.9	914.9	901.8	901.8	899.7
25°	896.8	888.9	871.8	873.8	871.8
27.5°	866.7	859.7	846.8	843.8	838.8
30°	836.8	828.8	813.8	810.7	806.7
32.5°	804.8	798.8	782.7	776.7	772.7
35°	773.7	763.7	747.7	741.6	736.6
37.5°	738.7	729.7	713.6	706.6	701.6
40°	702.7	694.6	678.6	669.7	665.7
42.5°	667.6	659.6	643.6	633.6	627.6
45°	629.6	622.6	607.5	596.6	592.5
47.5°	592.5	585.6	569.5	558.5	552.5
50°	553.5	548.5	534.5	520.5	515.5
52.5°	515.5	508.5	495.5	484.5	477.4
55°	476.5	470.5	458.4	446.5	441.5
57.5°	437.4	432.4	419.4	407.3	403.3
60°	398.3	394.4	380.4	369.3	366.4
62.5°	360.3	353.3	343.3	333.3	329.3
65°	321.4	315.3	305.3	296.3	291.3
67.5°	281.3	276.3	267.2	260.3	256.3
70°	244.2	240.2	231.2	224.2	220.3
72.5°	206.3	202.2	197.2	190.2	187.3
75°	168.1	166.2	161.1	155.2	157.2
77.5°	134.1	130.1	128.0	125.1	122.2
80°	100.1	99.1	97.0	94.1	92.1
82.5°	68.0	68.0	67.1	63.0	63.0
85°	41.0	40.0	39.1	36.0	35.0
87.5°	18.0	16.1	14.0	11.1	10.0
90°	1.2	15.7	26.0	32.7	35.2
92.5°	32.7	27.5	31.3	34.0	35.2
95°	84.9	41.7	50.9	57.6	56.2
97.5°	152.8	45.7	66.5	70.6	71.9
100°	231.3	52.3	74.5	84.9	87.5
102.5°	317.4	315.0	77.1	91.4	95.4
105°	397.2	436.4	79.7	94.0	99.3
107.5°	490.0	522.5	82.4	96.7	101.9
110°	578.9	606.2	228.7	98.1	103.2

TEST NUMBER: P922577

CATALOG NUMBER: DFN2DIP-SQ2F0-030D060US940-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	662.5	685.9	663.7	100.5	104.6
115°	751.3	773.5	806.2	201.3	107.2
117.5°	828.3	854.4	876.7	689.8	347.5
120°	914.6	934.2	957.8	973.4	797.0
122.5°	987.7	1008.6	1034.8	1042.6	1044.0
125°	1062.2	1079.2	1104.0	1113.2	1117.0
127.5°	1130.2	1148.4	1168.1	1181.2	1182.4
130°	1194.2	1215.1	1229.4	1243.8	1242.6
132.5°	1259.5	1276.6	1290.8	1302.6	1301.4
135°	1314.5	1335.4	1347.0	1360.2	1357.5
137.5°	1371.8	1387.5	1400.7	1413.7	1409.9
140°	1428.0	1438.6	1452.9	1464.6	1458.1
142.5°	1475.2	1484.3	1501.3	1511.6	1505.1
145°	1524.8	1523.4	1545.6	1554.8	1548.3
147.5°	1567.8	1563.9	1586.1	1592.6	1587.5
150°	1609.7	1600.5	1621.5	1629.2	1622.7
152.5°	1644.9	1634.5	1654.0	1662.0	1652.8
155°	1678.9	1667.2	1682.9	1690.7	1680.2
157.5°	1706.4	1695.9	1707.7	1716.9	1706.4
160°	1729.9	1722.0	1729.9	1737.7	1728.6
162.5°	1750.7	1742.9	1749.4	1758.6	1746.9
165°	1769.1	1761.3	1765.1	1774.3	1765.1
167.5°	1783.4	1775.6	1779.6	1788.8	1776.9
170°	1795.3	1787.3	1790.0	1799.1	1787.3
172.5°	1803.0	1795.3	1797.9	1807.1	1795.3
175°	1809.5	1800.4	1803.0	1812.1	1799.1
177.5°	1812.1	1803.0	1804.4	1813.6	1801.8
180°	1805.6	1805.6	1805.6	1805.6	1805.6

TEST NUMBER: P922577

CATALOG NUMBER: DFN2DIP-SQ2F0-030D060US940-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.26	8.99	9.35	10.08	11.57	7.82	8.55	8.90	9.63	11.12
	3H	9.89	10.55	10.99	11.64	13.15	9.40	10.06	10.50	11.15	12.66
	4H	10.46	11.08	11.57	12.18	13.69	9.97	10.59	11.07	11.68	13.20
	6H	10.84	11.41	11.95	12.51	14.03	10.34	10.91	11.46	12.01	13.53
	8H	10.93	11.47	12.05	12.59	14.11	10.43	10.97	11.55	12.09	13.61
	12H	10.97	11.48	12.09	12.59	14.14	10.46	10.98	11.58	12.08	13.63
4H	2H	8.69	9.32	9.81	10.41	11.93	8.34	8.96	9.45	10.06	11.57
	3H	10.53	11.04	11.65	12.17	13.69	10.12	10.64	11.24	11.76	13.28
	4H	11.22	11.69	12.34	12.81	14.35	10.80	11.27	11.92	12.38	13.93
	6H	11.71	12.12	12.84	13.25	14.79	11.28	11.68	12.41	12.82	14.36
	8H	11.84	12.23	12.98	13.35	14.91	11.41	11.79	12.54	12.92	14.47
	12H	11.90	12.25	13.05	13.39	14.95	11.45	11.80	12.60	12.94	14.50
8H	4H	11.39	11.77	12.52	12.90	14.46	11.02	11.40	12.15	12.52	14.08
	6H	11.99	12.31	13.15	13.48	15.03	11.61	11.93	12.76	13.09	14.65
	8H	12.20	12.48	13.36	13.62	15.20	11.81	12.08	12.97	13.23	14.80
	12H	12.31	12.55	13.47	13.70	15.31	11.90	12.14	13.07	13.29	14.90
12H	4H	11.37	11.71	12.52	12.85	14.41	11.00	11.35	12.15	12.48	14.04
	6H	12.02	12.29	13.18	13.44	15.01	11.65	11.92	12.80	13.07	14.64
	8H	12.24	12.48	13.40	13.63	15.23	11.86	12.10	13.02	13.25	14.85