

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P922640

Luminaire Tested: DFN2DIP-SQ2F0-060D040US940-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P922640
REPORT IS A COMBINATION OF REPORTS P899789 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-060D040US940-FLLFL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 8453.4 lumens
Efficiency: N/A
Efficacy: 100.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 84.5
Input Voltage (V): 120
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P922640
CATALOG NUMBER: DFN2DIP-SQ2F0-060D040US940-FLLFL

Luminous Intensity Polar Plot

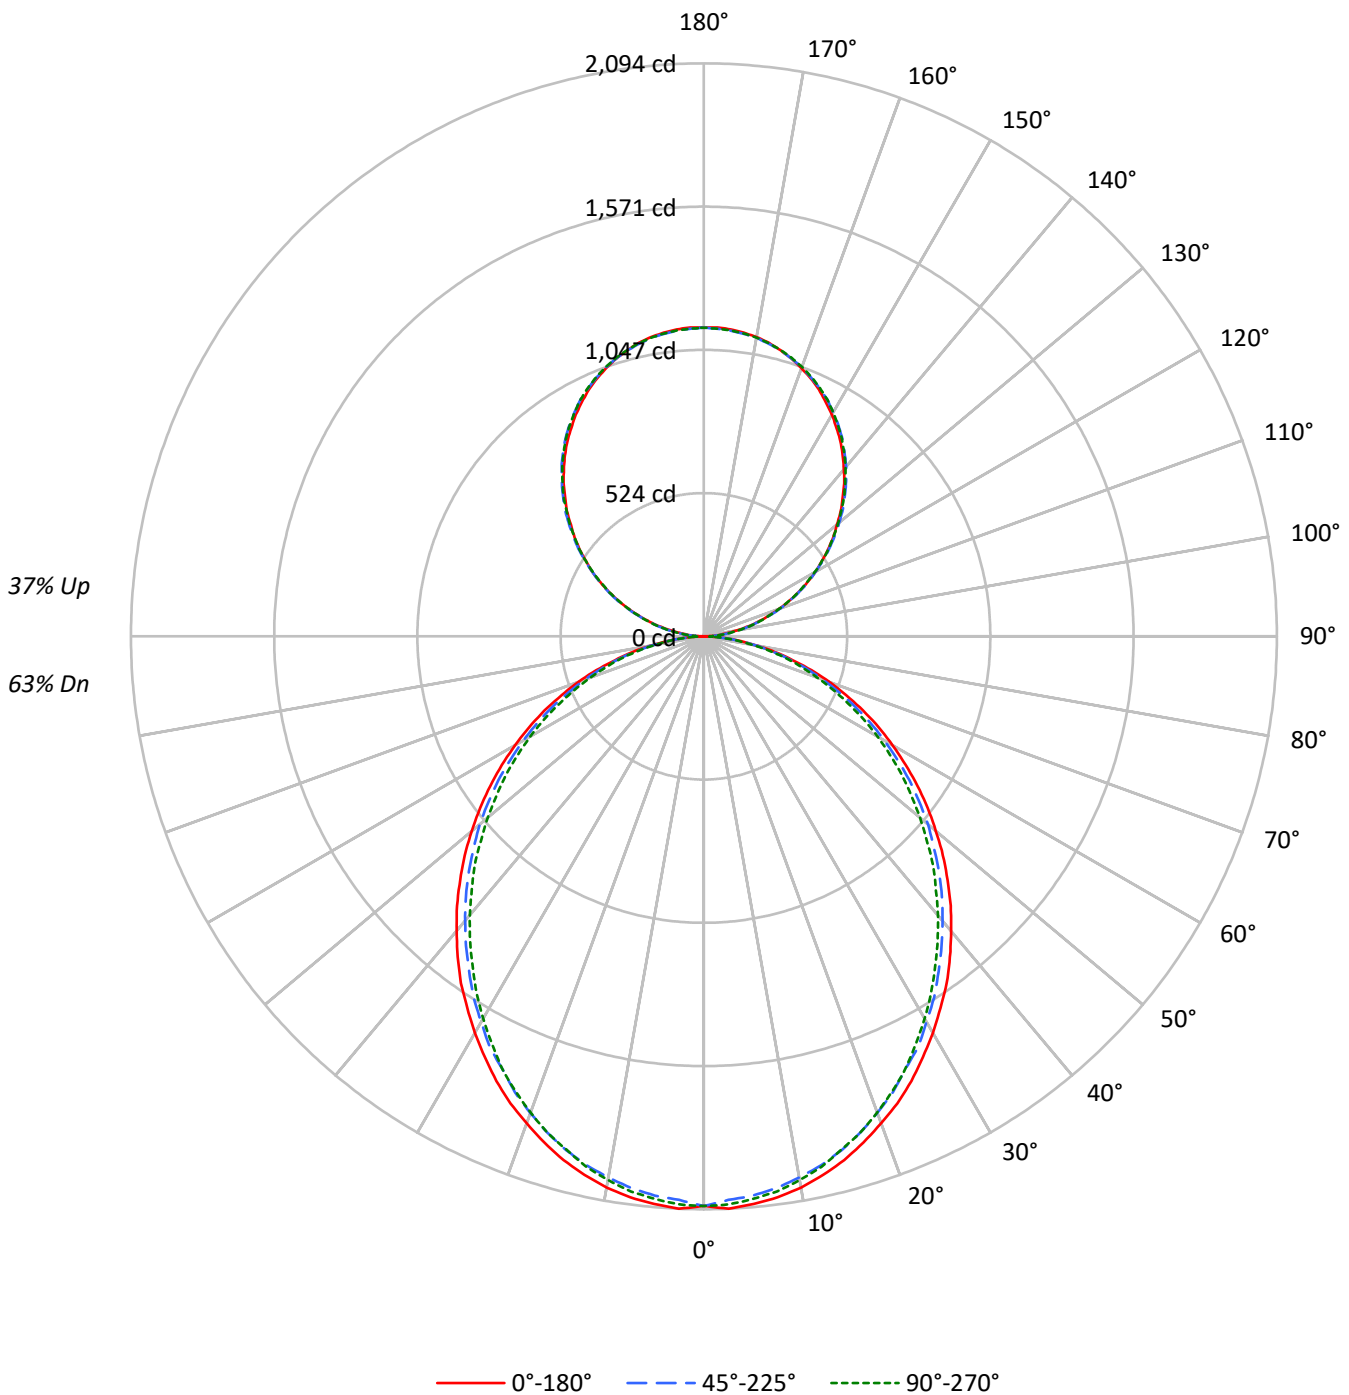



TEST NUMBER: P922640

CATALOG NUMBER: DFN2DIP-SQ2F0-060D040US940-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	110	110	110	110	103	103	103	103	90	90	90	79	79	79	68	68	68	68	68	68	63
1	101	96	92	89	94	90	87	84	79	77	74	69	67	66	60	59	57	60	59	57	53
2	92	84	78	72	86	79	73	69	70	65	62	61	58	55	53	50	48	53	50	48	44
3	84	74	66	60	78	70	63	58	61	56	52	54	50	46	47	44	41	47	44	41	37
4	77	66	57	51	71	62	54	49	55	49	44	48	43	40	42	38	35	42	38	35	32
5	70	58	50	44	66	55	48	42	49	43	38	43	38	35	38	34	31	38	34	31	28
6	65	53	44	38	61	50	42	37	44	38	33	39	34	30	34	30	27	34	30	27	25
7	60	48	39	34	56	45	38	32	40	34	30	36	31	27	31	27	24	31	27	24	22
8	56	43	35	30	52	41	34	29	37	31	26	33	28	24	29	25	22	29	25	22	20
9	52	40	32	27	49	38	30	26	34	28	24	30	25	22	27	23	20	27	23	20	18
10	49	36	29	24	46	35	28	23	31	25	21	28	23	20	25	21	18	25	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4578	4578	4578
5°	4577	4504	4538
10°	4532	4433	4470
15°	4457	4350	4368
20°	4359	4239	4263
25°	4262	4108	4143
30°	4142	3985	3993
35°	4027	3842	3834
40°	3886	3697	3682
45°	3747	3551	3526
50°	3593	3398	3346
55°	3432	3221	3179
60°	3249	3012	2988
65°	3048	2794	2763
70°	2794	2529	2519
75°	2444	2210	2285
80°	2019	1804	1856
85°	1362	1139	1166

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3747 cd/sqm



TEST NUMBER: P922640

CATALOG NUMBER: DFN2DIP-SQ2F0-060D040US940-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	195.9	2.3
10°-20°	551.3	6.5
20°-30°	810.2	9.6
30°-40°	941.0	11.1
40°-50°	939.8	11.1
50°-60°	819.5	9.7
60°-70°	605.8	7.2
70°-80°	342.7	4.1
80°-90°	93.7	1.1
90°-100°	69.8	0.8
100°-110°	221.8	2.6
110°-120°	379.5	4.5
120°-130°	499.2	5.9
130°-140°	560.3	6.6
140°-150°	549.4	6.5
150°-160°	460.9	5.5
160°-170°	305.7	3.6
170°-180°	106.8	1.3
0°-30°	1557.4	18.4
0°-40°	2498.4	29.6
0°-60°	4257.8	50.4
0°-90°	5300.0	62.7
90°-120°	671.2	7.9
90°-150°	2280.1	27.0
90°-180°	3153.0	37.3
0°-180°	8453.4	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2082	2082	2082	2082	2082	
5°	2082	2074	2052	2068	2064	198
15°	1982	1970	1944	1952	1942	558
25°	1794	1778	1744	1748	1744	825
35°	1548	1528	1495	1483	1473	966
45°	1259	1245	1215	1193	1185	972
55°	953	941	917	893	883	852
65°	643	631	611	592	583	635
75°	336	332	322	310	314	359
85°	82	80	78	72	70	91
90°	1	12	33	31	32	8
95°	50	59	61	61	59	55
105°	205	207	210	211	211	216
115°	381	386	385	384	381	377
125°	554	562	560	557	556	495
135°	717	727	729	728	725	554
145°	870	877	882	883	880	544
155°	995	998	1000	1005	1002	458
165°	1082	1081	1081	1088	1083	305
175°	1126	1123	1121	1128	1122	107
180°	1128	1128	1128	1128	1128	



TEST NUMBER: P922640

CATALOG NUMBER: DFN2DIP-SQ2F0-060D040US940-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2081.8	2081.8	2081.8	2081.8	2081.8
2.5°	2093.9	2083.9	2061.8	2081.8	2078.0
5°	2081.8	2073.9	2051.8	2067.8	2064.0
7.5°	2067.8	2055.9	2033.8	2050.0	2045.9
10°	2045.9	2031.9	2007.9	2023.8	2017.9
12.5°	2015.8	2003.9	1979.9	1989.9	1985.8
15°	1981.7	1969.9	1943.8	1951.9	1941.9
17.5°	1939.7	1927.9	1901.8	1911.6	1901.8
20°	1893.6	1881.8	1853.7	1859.7	1851.8
22.5°	1847.8	1829.7	1803.6	1803.6	1799.6
25°	1793.6	1777.7	1743.7	1747.5	1743.7
27.5°	1733.5	1719.5	1693.5	1687.7	1677.7
30°	1673.7	1657.4	1627.5	1621.6	1613.5
32.5°	1609.4	1597.6	1565.5	1553.4	1545.3
35°	1547.5	1527.5	1495.4	1483.3	1473.3
37.5°	1477.4	1459.3	1427.3	1413.2	1403.2
40°	1405.3	1389.2	1357.2	1339.3	1331.2
42.5°	1335.2	1319.1	1287.3	1267.1	1255.2
45°	1259.3	1245.2	1215.0	1193.2	1185.1
47.5°	1185.1	1171.1	1139.1	1117.0	1105.0
50°	1107.0	1097.0	1069.0	1040.9	1030.9
52.5°	1030.9	1016.9	991.0	968.9	954.9
55°	953.0	940.8	916.9	892.9	882.9
57.5°	874.9	864.9	838.7	814.8	806.6
60°	796.7	788.8	760.8	738.7	732.7
62.5°	720.6	706.6	686.6	666.6	658.6
65°	642.7	630.6	610.6	592.5	582.6
67.5°	562.6	552.4	534.6	520.6	512.5
70°	488.5	480.5	462.4	448.4	440.5
72.5°	412.4	404.4	394.4	380.4	374.4
75°	336.2	332.4	322.2	310.3	314.3
77.5°	268.2	260.2	256.1	250.2	244.2
80°	200.3	198.1	194.1	188.2	184.1
82.5°	136.2	136.2	134.2	126.2	126.2
85°	81.9	80.1	78.1	72.0	70.1
87.5°	36.1	32.1	28.0	22.1	20.0
90°	1.0	12.2	33.3	31.3	32.3
92.5°	21.0	28.5	29.6	30.6	30.6
95°	49.7	59.2	60.9	60.9	59.2
97.5°	82.7	91.5	95.2	95.2	95.2
100°	120.7	128.6	131.3	131.3	130.3
102.5°	160.9	166.7	170.4	171.4	170.4
105°	204.7	207.4	209.5	211.2	211.2
107.5°	248.3	252.4	252.4	253.0	248.3
110°	290.4	295.9	295.9	295.9	293.2



TEST NUMBER: P922640

CATALOG NUMBER: DFN2DIP-SQ2F0-060D040US940-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	336.0	341.8	340.7	338.0	336.0
115°	380.8	386.4	384.6	383.6	380.8
117.5°	425.4	432.9	428.2	425.4	422.8
120°	470.4	477.8	470.4	470.4	467.3
122.5°	511.1	520.7	515.9	513.2	511.1
125°	554.0	562.5	559.8	556.7	555.7
127.5°	595.8	606.4	602.6	598.5	595.8
130°	634.9	647.2	645.5	643.5	639.7
132.5°	678.8	688.3	689.0	684.2	681.5
135°	716.6	727.1	729.2	728.1	725.4
137.5°	758.8	767.2	768.9	768.2	764.2
140°	795.8	804.3	809.0	809.0	805.3
142.5°	833.9	842.4	845.1	846.1	842.4
145°	870.0	876.7	882.2	883.2	879.5
147.5°	902.2	910.7	914.8	916.5	912.8
150°	935.6	941.4	945.1	948.2	945.1
152.5°	965.2	970.9	975.7	979.5	975.7
155°	994.7	997.5	1000.5	1005.3	1002.2
157.5°	1020.3	1022.3	1024.0	1030.8	1026.0
160°	1043.0	1045.1	1046.1	1051.9	1047.8
162.5°	1064.1	1064.1	1065.1	1071.6	1066.8
165°	1082.2	1081.1	1081.1	1087.9	1083.2
167.5°	1098.5	1095.4	1095.4	1102.2	1097.4
170°	1110.7	1108.0	1107.0	1113.7	1108.0
172.5°	1119.2	1116.5	1115.4	1122.3	1116.5
175°	1126.1	1123.3	1121.2	1128.0	1122.3
177.5°	1129.8	1127.0	1125.0	1130.8	1125.0
180°	1128.0	1128.0	1128.0	1128.0	1128.0



TEST NUMBER: P922640
 CATALOG NUMBER: DFN2DIP-SQ2F0-060D040US940-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.54	14.53	14.38	15.39	16.47	13.09	14.08	13.93	14.94	16.02
	3H	15.19	16.07	16.04	16.95	18.05	14.70	15.58	15.55	16.46	17.56
	4H	15.77	16.61	16.64	17.48	18.60	15.27	16.11	16.14	16.99	18.11
	6H	16.16	16.93	17.04	17.82	18.95	15.66	16.43	16.54	17.32	18.45
	8H	16.26	17.00	17.15	17.90	19.03	15.76	16.50	16.65	17.40	18.53
	12H	16.31	17.01	17.20	17.90	19.06	15.80	16.50	16.69	17.40	18.55
4H	2H	14.00	14.84	14.88	15.72	16.83	13.65	14.49	14.52	15.36	16.48
	3H	15.86	16.56	16.74	17.47	18.60	15.45	16.15	16.33	17.06	18.19
	4H	16.56	17.20	17.46	18.11	19.26	16.14	16.77	17.03	17.68	18.84
	6H	17.06	17.62	17.98	18.55	19.70	16.63	17.18	17.54	18.11	19.27
	8H	17.21	17.72	18.12	18.65	19.82	16.77	17.29	17.68	18.21	19.38
	12H	17.28	17.74	18.21	18.69	19.86	16.83	17.29	17.76	18.24	19.41
8H	4H	16.76	17.27	17.67	18.20	19.37	16.38	16.89	17.29	17.82	18.99
	6H	17.37	17.80	18.31	18.76	19.93	16.98	17.41	17.92	18.38	19.55
	8H	17.58	17.95	18.53	18.91	20.10	17.18	17.56	18.13	18.52	19.71
	12H	17.70	18.03	18.66	18.98	20.22	17.29	17.62	18.25	18.57	19.81
12H	4H	16.74	17.21	17.68	18.15	19.33	16.38	16.84	17.31	17.78	18.96
	6H	17.39	17.77	18.34	18.73	19.92	17.02	17.40	17.97	18.36	19.55
	8H	17.63	17.96	18.58	18.91	20.15	17.25	17.58	18.20	18.53	19.77