

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P925336

Luminaire Tested: DFN2DIP-SQ2F0-040D080US950-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P925336
REPORT IS A COMBINATION OF REPORTS P899833 AND P896659
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ2F0-040D080US950-FLLFL
Description: 2 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 10532.2 lumens
Efficiency: N/A
Efficacy: 106.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 2.21' x L: 2.21' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 98.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P925336
CATALOG NUMBER: DFN2DIP-SQ2F0-040D080US950-FLLFL

Luminous Intensity Polar Plot

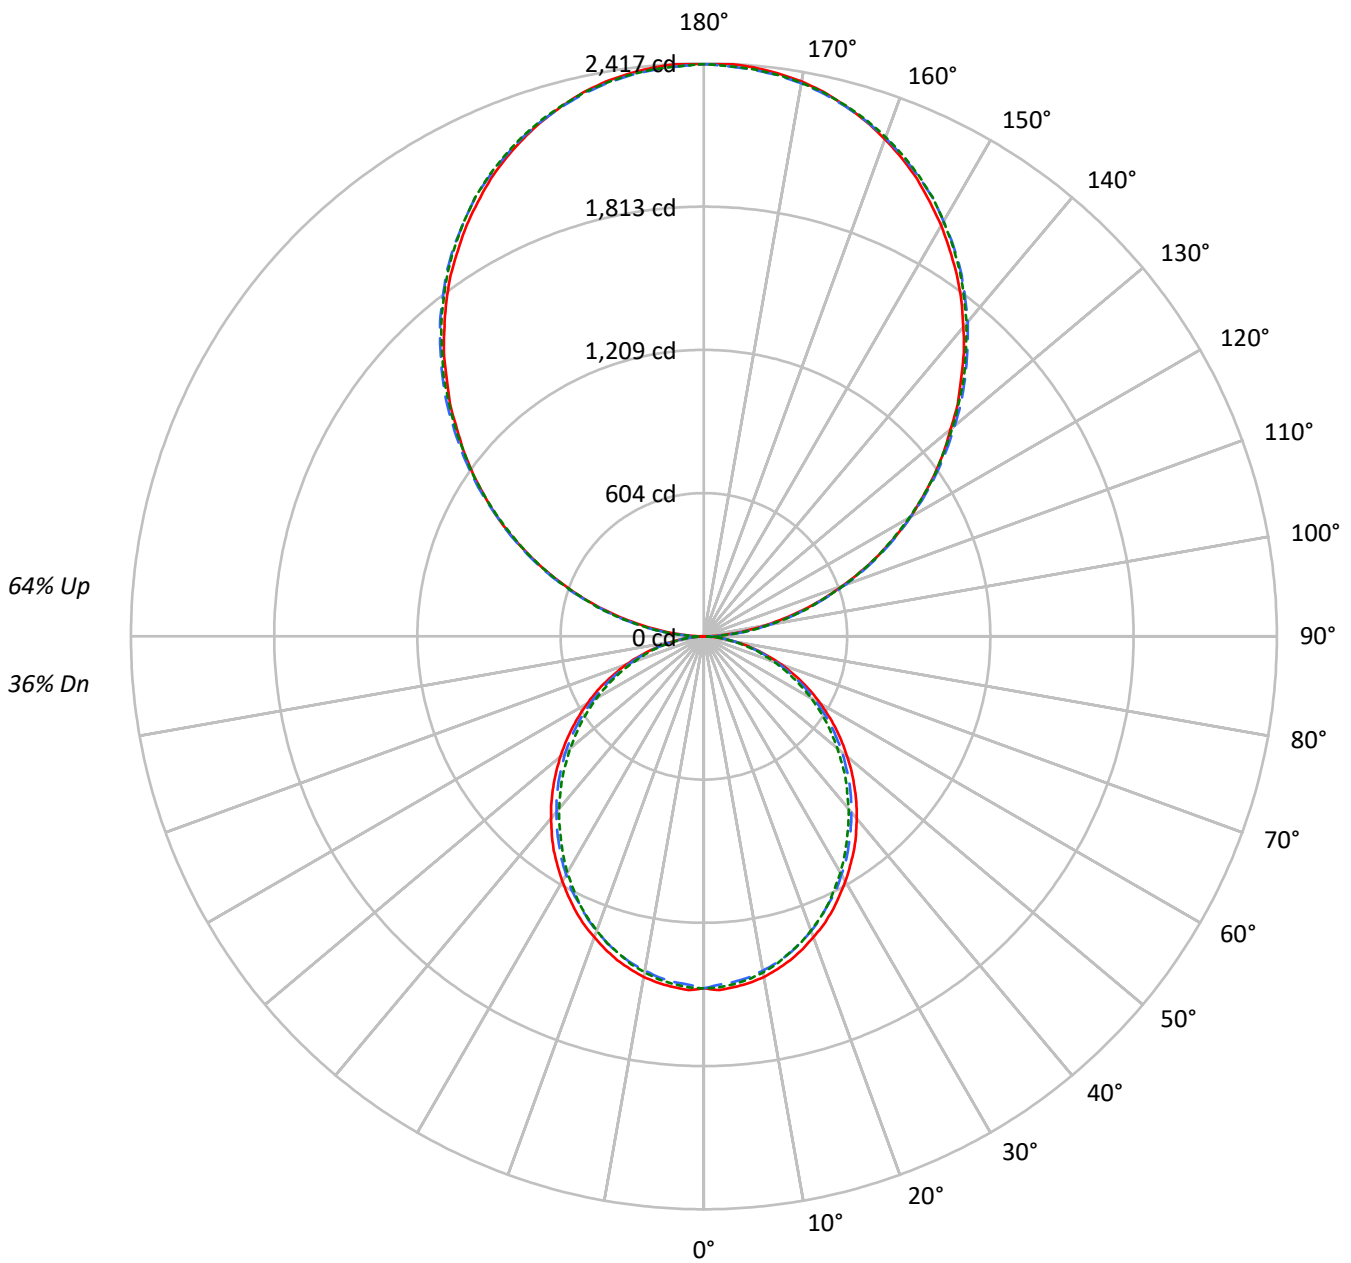

— 0°-180° - - 45°-225° - - - 90°-270°



TEST NUMBER: P925336
 CATALOG NUMBER: DFN2DIP-SQ2F0-040D080US950-FLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	43	43	43	36			36
1	95	90	87	83	85	82	79	76	66	64	62	52	50	49	38	37	36	30			30
2	86	79	73	68	78	72	66	62	58	54	51	45	43	41	34	32	31	25			25
3	79	69	62	56	71	63	57	52	51	47	43	40	37	34	30	28	26	21			21
4	72	61	54	48	65	56	49	44	45	40	37	36	32	29	27	24	22	18			18
5	66	54	47	41	59	50	43	38	40	35	31	32	28	25	24	22	20	16			16
6	61	49	41	35	55	45	38	33	36	31	27	29	25	22	22	19	17	14			14
7	56	44	36	31	50	40	33	28	33	28	24	26	22	20	20	17	15	12			12
8	52	40	32	27	47	36	30	25	30	25	21	24	20	17	18	16	14	11			11
9	48	36	29	24	44	33	27	22	27	22	19	22	18	16	17	14	12	10			10
10	45	33	26	21	41	30	24	20	25	20	17	20	17	14	16	13	11	9			9

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3265	3265	3265
5°	3264	3212	3237
10°	3232	3162	3188
15°	3179	3103	3115
20°	3109	3023	3041
25°	3040	2930	2955
30°	2954	2842	2848
35°	2872	2740	2734
40°	2772	2637	2626
45°	2672	2533	2515
50°	2563	2423	2386
55°	2448	2297	2268
60°	2317	2148	2131
65°	2174	1993	1971
70°	1992	1804	1797
75°	1743	1576	1630
80°	1439	1286	1324
85°	973	812	832

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°
 Vertical Angle: 90°
 Luminance: 3367 cd/sqm



TEST NUMBER: P925336

CATALOG NUMBER: DFN2DIP-SQ2F0-040D080US950-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	139.8	1.3
10°-20°	393.2	3.7
20°-30°	577.9	5.5
30°-40°	671.2	6.4
40°-50°	670.3	6.4
50°-60°	584.5	5.5
60°-70°	432.1	4.1
70°-80°	244.5	2.3
80°-90°	71.4	0.7
90°-100°	149.4	1.4
100°-110°	474.6	4.5
110°-120°	812.1	7.7
120°-130°	1068.1	10.1
130°-140°	1198.9	11.4
140°-150°	1175.6	11.2
150°-160°	986.2	9.4
160°-170°	654.0	6.2
170°-180°	228.6	2.2
0°-30°	1110.8	10.5
0°-40°	1782.0	16.9
0°-60°	3036.8	28.8
0°-90°	3784.7	35.9
90°-120°	1436.1	13.6
90°-150°	4878.6	46.3
90°-180°	6747.0	64.1
0°-180°	10532.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1485	1485	1485	1485	1485	
5°	1485	1479	1463	1475	1472	141
15°	1413	1405	1386	1392	1385	398
25°	1279	1268	1244	1246	1244	589
35°	1104	1090	1067	1058	1051	689
45°	898	888	867	851	845	693
55°	680	671	654	637	630	608
65°	458	450	436	423	416	453
75°	240	237	230	221	224	256
85°	58	57	56	51	50	65
90°	2	26	71	67	69	10
95°	106	127	130	130	127	118
105°	438	444	448	452	452	462
115°	815	827	823	821	815	806
125°	1185	1204	1198	1191	1189	1059
135°	1533	1556	1560	1558	1552	1185
145°	1861	1876	1888	1890	1882	1163
155°	2128	2134	2141	2151	2144	980
165°	2316	2313	2313	2328	2318	653
175°	2409	2404	2399	2414	2401	229
180°	2414	2414	2414	2414	2414	



TEST NUMBER: P925336

CATALOG NUMBER: DFN2DIP-SQ2F0-040D080US950-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1484.8	1484.8	1484.8	1484.8	1484.8
2.5°	1493.5	1486.3	1470.6	1484.8	1482.1
5°	1484.8	1479.2	1463.4	1474.8	1472.1
7.5°	1474.8	1466.3	1450.6	1462.1	1459.2
10°	1459.2	1449.2	1432.1	1443.5	1439.2
12.5°	1437.7	1429.2	1412.1	1419.3	1416.3
15°	1413.4	1405.0	1386.4	1392.1	1385.0
17.5°	1383.5	1375.0	1356.4	1363.5	1356.4
20°	1350.6	1342.1	1322.1	1326.3	1320.8
22.5°	1317.9	1305.0	1286.4	1286.4	1283.5
25°	1279.2	1267.9	1243.6	1246.4	1243.6
27.5°	1236.4	1226.4	1208.0	1203.7	1196.6
30°	1193.6	1182.2	1160.8	1156.5	1150.8
32.5°	1147.9	1139.5	1116.6	1108.0	1102.2
35°	1103.7	1089.5	1066.6	1058.0	1050.8
37.5°	1053.7	1040.8	1017.9	1008.0	1000.8
40°	1002.4	990.8	967.9	955.2	949.5
42.5°	952.4	940.8	918.1	903.7	895.2
45°	898.1	888.2	866.6	851.1	845.2
47.5°	845.2	835.2	812.4	796.7	788.2
50°	789.5	782.4	762.4	742.4	735.2
52.5°	735.2	725.3	706.8	691.1	681.1
55°	679.7	671.0	654.0	636.8	629.7
57.5°	623.9	616.9	598.2	581.1	575.4
60°	568.2	562.6	542.6	526.9	522.6
62.5°	514.0	504.0	489.8	475.5	469.7
65°	458.4	449.7	435.5	422.6	415.6
67.5°	401.3	394.0	381.3	371.3	365.6
70°	348.4	342.7	329.8	319.8	314.2
72.5°	294.2	288.4	281.3	271.3	267.0
75°	239.8	237.1	229.8	221.3	224.2
77.5°	191.3	185.6	182.7	178.4	174.2
80°	142.8	141.3	138.4	134.2	131.4
82.5°	97.1	97.1	95.8	90.0	90.0
85°	58.5	57.1	55.7	51.3	50.0
87.5°	25.8	22.9	20.0	15.7	14.2
90°	2.2	26.2	71.4	67.0	69.2
92.5°	45.1	61.2	63.3	65.4	65.4
95°	106.3	126.6	130.2	130.2	126.6
97.5°	176.9	195.8	203.8	203.8	203.8
100°	258.3	275.0	280.9	280.9	278.7
102.5°	344.2	356.6	364.5	366.7	364.5
105°	438.1	443.9	448.3	451.9	451.9
107.5°	531.2	540.0	540.0	541.4	531.2
110°	621.4	633.1	633.1	633.1	627.3



TEST NUMBER: P925336

CATALOG NUMBER: DFN2DIP-SQ2F0-040D080US950-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	718.9	731.3	729.1	723.3	718.9
115°	815.0	826.6	823.0	820.8	815.0
117.5°	910.3	926.3	916.1	910.3	904.5
120°	1006.4	1022.4	1006.4	1006.4	999.8
122.5°	1093.7	1114.1	1103.9	1098.1	1093.7
125°	1185.3	1203.6	1197.7	1191.2	1189.1
127.5°	1274.9	1297.4	1289.4	1280.7	1274.9
130°	1358.6	1384.7	1381.1	1376.8	1368.8
132.5°	1452.5	1472.8	1474.3	1464.1	1458.3
135°	1533.2	1555.8	1560.2	1558.0	1552.2
137.5°	1623.4	1641.6	1645.3	1643.8	1635.1
140°	1702.8	1720.9	1731.1	1731.1	1723.1
142.5°	1784.3	1802.5	1808.3	1810.5	1802.5
145°	1861.4	1875.9	1887.6	1889.8	1881.8
147.5°	1930.5	1948.7	1957.4	1961.1	1953.1
150°	2001.9	2014.2	2022.2	2028.8	2022.2
152.5°	2065.1	2077.5	2087.7	2095.7	2087.7
155°	2128.5	2134.3	2140.9	2151.0	2144.5
157.5°	2183.0	2187.4	2191.1	2205.6	2195.4
160°	2231.8	2236.2	2238.4	2250.7	2242.0
162.5°	2276.9	2276.9	2279.1	2292.9	2282.7
165°	2315.5	2313.3	2313.3	2327.9	2317.6
167.5°	2350.4	2343.9	2343.9	2358.4	2348.2
170°	2376.6	2370.8	2368.6	2383.2	2370.8
172.5°	2394.8	2389.0	2386.8	2401.3	2389.0
175°	2409.3	2403.5	2399.1	2413.7	2401.3
177.5°	2417.3	2411.5	2407.1	2419.5	2407.1
180°	2413.7	2413.7	2413.7	2413.7	2413.7



TEST NUMBER: P925336
 CATALOG NUMBER: DFN2DIP-SQ2F0-040D080US950-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.80	10.55	10.87	11.62	13.08	9.36	10.11	10.43	11.18	12.64
	3H	11.44	12.11	12.51	13.19	14.66	10.95	11.62	12.02	12.70	14.17
	4H	12.01	12.64	13.10	13.72	15.21	11.51	12.15	12.60	13.23	14.71
	6H	12.38	12.97	13.48	14.05	15.55	11.88	12.47	12.98	13.55	15.05
	8H	12.48	13.04	13.58	14.14	15.62	11.98	12.53	13.08	13.63	15.12
	12H	12.52	13.04	13.62	14.14	15.65	12.01	12.54	13.11	13.63	15.14
4H	2H	10.24	10.88	11.34	11.96	13.44	9.88	10.52	10.98	11.60	13.08
	3H	12.07	12.60	13.18	13.71	15.21	11.66	12.20	12.77	13.30	14.80
	4H	12.77	13.25	13.87	14.35	15.87	12.34	12.83	13.45	13.93	15.44
	6H	13.26	13.67	14.37	14.80	16.30	12.82	13.24	13.94	14.36	15.87
	8H	13.39	13.78	14.51	14.90	16.42	12.96	13.35	14.07	14.46	15.99
	12H	13.45	13.81	14.59	14.93	16.46	13.00	13.36	14.14	14.48	16.01
8H	4H	12.94	13.33	14.06	14.45	15.97	12.56	12.95	13.68	14.07	15.59
	6H	13.54	13.87	14.68	15.02	16.54	13.16	13.48	14.30	14.64	16.16
	8H	13.75	14.03	14.89	15.17	16.71	13.36	13.64	14.50	14.78	16.32
	12H	13.86	14.11	15.01	15.24	16.82	13.45	13.70	14.60	14.83	16.41
12H	4H	12.92	13.27	14.05	14.40	15.93	12.55	12.90	13.68	14.03	15.56
	6H	13.57	13.85	14.71	14.99	16.53	13.20	13.48	14.34	14.61	16.16
	8H	13.79	14.04	14.94	15.17	16.75	13.41	13.66	14.56	14.79	16.37