

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903674

Luminaire Tested: DFN2DIP-SQ3F0-050D100US830-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903674
REPORT IS A COMBINATION OF REPORTS P899972 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-050D100US830-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12347.3 lumens
Efficiency: N/A
Efficacy: 103.2 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 119.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903674

CATALOG NUMBER: DFN2DIP-SQ3F0-050D100US830-RLLFLL

Luminous Intensity Polar Plot

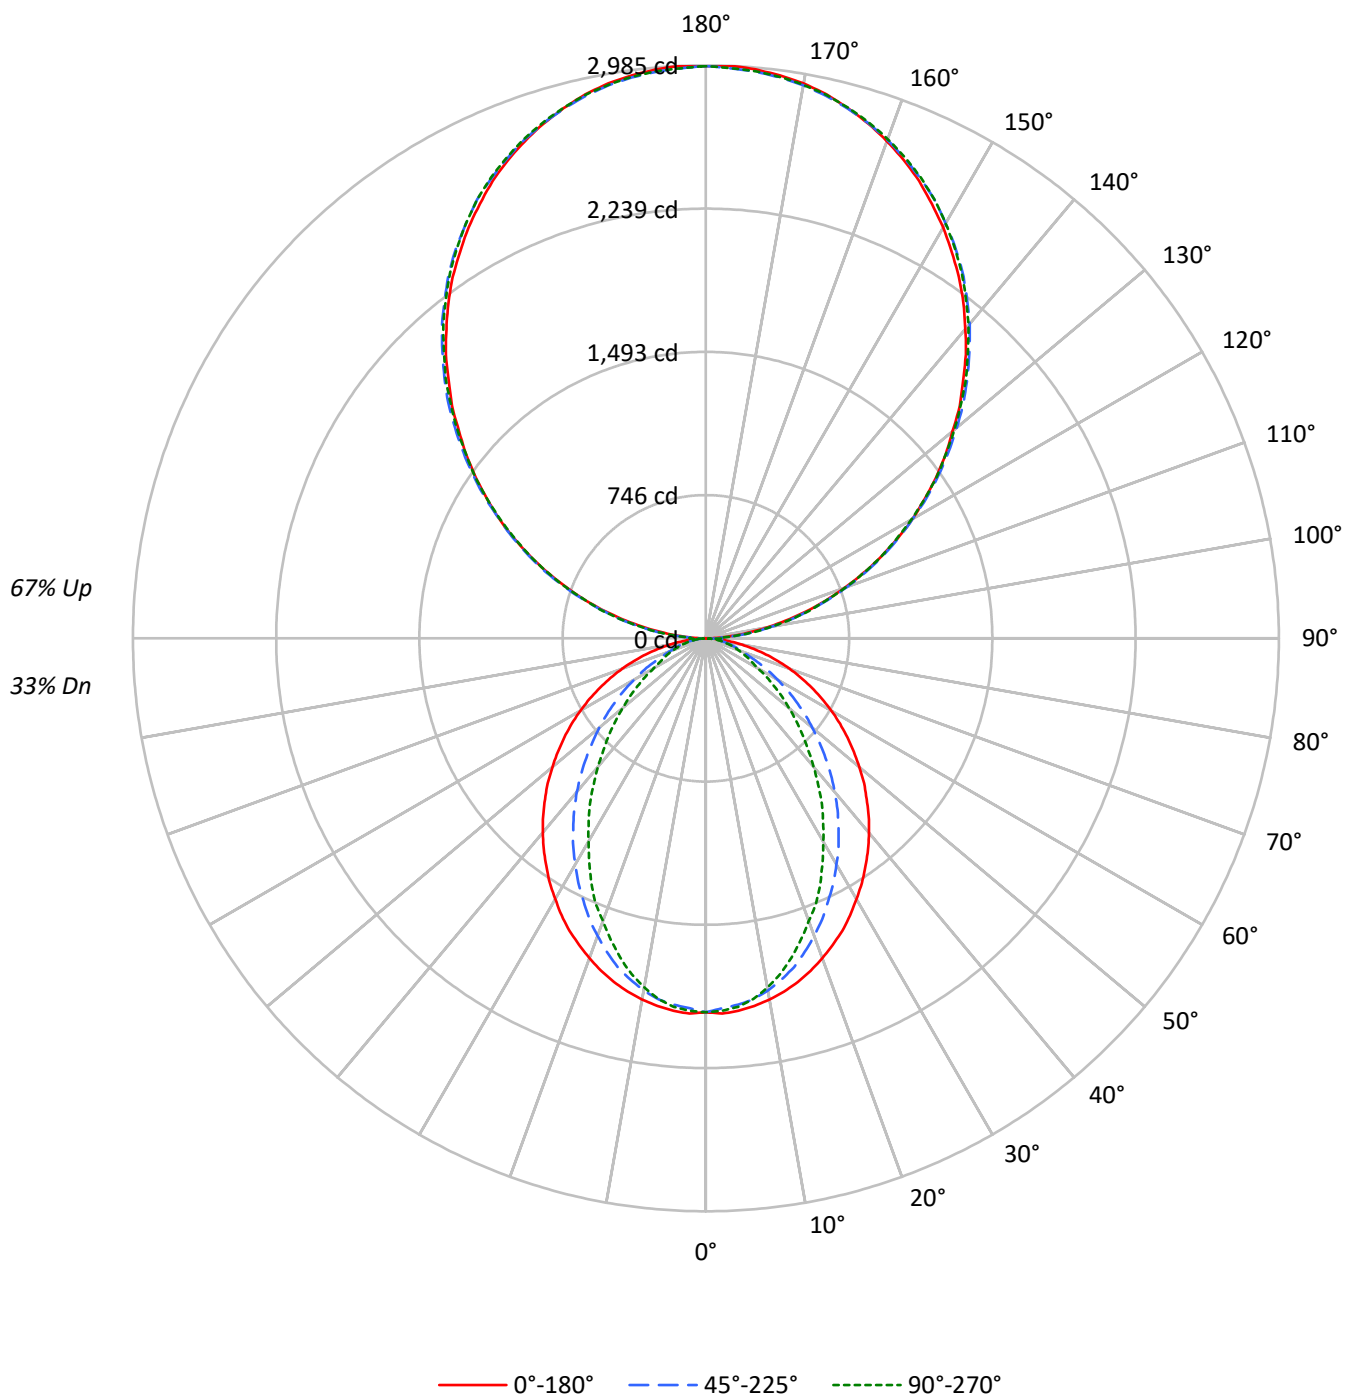

TEST NUMBER: P903674

CATALOG NUMBER: DFN2DIP-SQ3F0-050D100US830-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	56	56	56	40	40	40
1	94	90	86	83	85	81	78	75	65	63	61	50	48	47	36	35	34
2	86	79	73	68	77	71	67	62	57	54	51	44	42	40	32	31	29
3	79	70	63	57	71	63	57	52	51	46	43	39	36	34	29	27	25
4	72	62	54	49	65	56	50	45	45	41	37	35	32	29	26	24	22
5	66	55	47	42	59	50	43	38	40	36	32	32	28	26	23	21	19
6	61	49	42	36	55	45	38	33	36	32	28	29	25	23	21	19	17
7	56	45	37	32	51	41	34	29	33	28	25	26	23	20	19	17	15
8	52	40	33	28	47	37	30	26	30	25	22	24	20	18	18	16	14
9	49	37	30	25	44	34	27	23	28	23	20	22	19	16	17	14	13
10	45	34	27	22	41	31	25	21	25	21	18	20	17	15	15	13	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2232	2232	2232
5°	2234	2195	2210
10°	2210	2150	2137
15°	2179	2078	2025
20°	2137	1978	1888
25°	2094	1867	1756
30°	2037	1754	1588
35°	1982	1631	1441
40°	1925	1505	1273
45°	1859	1365	1120
50°	1791	1224	971
55°	1719	1074	828
60°	1636	916	681
65°	1541	757	612
70°	1425	608	552
75°	1280	533	501
80°	1070	442	432
85°	726	288	321

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2999 cd/sqm

TEST NUMBER: P903674

CATALOG NUMBER: DFN2DIP-SQ3F0-050D100US830-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.5	1.5
10°-20°	501.1	4.1
20°-30°	703.6	5.7
30°-40°	766.9	6.2
40°-50°	704.9	5.7
50°-60°	553.6	4.5
60°-70°	360.3	2.9
70°-80°	185.5	1.5
80°-90°	55.8	0.5
90°-100°	184.5	1.5
100°-110°	586.1	4.7
110°-120°	1003.0	8.1
120°-130°	1319.1	10.7
130°-140°	1480.6	12.0
140°-150°	1451.9	11.8
150°-160°	1217.9	9.9
160°-170°	807.7	6.5
170°-180°	282.3	2.3
0°-30°	1387.2	11.2
0°-40°	2154.2	17.4
0°-60°	3412.7	27.6
0°-90°	4014.3	32.5
90°-120°	1773.5	14.4
90°-150°	6025.1	48.8
90°-180°	8333.0	67.5
0°-180°	12347.3	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1948	1948	1948	1948	1948	
5°	1948	1939	1916	1932	1927	185
15°	1853	1833	1773	1740	1722	522
25°	1682	1625	1509	1437	1410	773
35°	1449	1359	1204	1093	1054	907
45°	1185	1066	881	756	714	915
55°	901	763	573	467	434	805
65°	608	465	307	247	242	603
75°	324	201	141	129	127	343
85°	76	39	34	34	34	87
90°	3	32	88	83	85	12
95°	131	156	161	161	156	146
105°	541	548	554	558	558	571
115°	1006	1021	1016	1014	1006	996
125°	1464	1486	1479	1471	1468	1308
135°	1894	1921	1927	1924	1917	1464
145°	2299	2317	2331	2334	2324	1436
155°	2629	2636	2644	2656	2648	1210
165°	2860	2857	2857	2875	2862	807
175°	2976	2968	2963	2981	2966	283
180°	2981	2981	2981	2981	2981	

TEST NUMBER: P903674

CATALOG NUMBER: DFN2DIP-SQ3F0-050D100US830-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1947.8	1947.8	1947.8	1947.8	1947.8
2.5°	1956.5	1947.8	1928.3	1946.1	1942.5
5°	1947.8	1939.0	1916.0	1931.8	1926.7
7.5°	1931.8	1921.4	1896.7	1903.7	1894.8
10°	1910.7	1898.4	1863.2	1857.8	1847.3
12.5°	1884.3	1868.5	1820.8	1810.3	1790.8
15°	1852.6	1833.2	1773.3	1739.8	1722.2
17.5°	1815.5	1787.3	1713.3	1674.5	1646.2
20°	1773.3	1738.0	1649.8	1605.9	1567.0
22.5°	1727.5	1686.9	1584.6	1524.8	1498.4
25°	1681.6	1625.1	1508.8	1436.6	1410.0
27.5°	1627.0	1567.0	1438.3	1355.5	1314.9
30°	1568.9	1501.8	1360.7	1270.9	1223.2
32.5°	1512.4	1431.3	1286.9	1181.0	1136.9
35°	1449.0	1359.1	1204.0	1092.9	1054.0
37.5°	1387.2	1290.2	1126.4	1004.7	960.7
40°	1322.0	1216.4	1045.2	920.1	874.3
42.5°	1255.1	1142.3	964.2	833.7	789.8
45°	1184.6	1066.4	881.4	756.1	713.8
47.5°	1117.6	992.5	802.1	676.8	638.1
50°	1043.6	918.4	724.5	602.8	565.9
52.5°	971.2	839.0	650.4	534.1	500.7
55°	900.7	763.2	572.8	467.1	433.7
57.5°	828.5	687.5	504.2	405.5	377.2
60°	754.4	613.4	431.8	342.0	313.8
62.5°	682.2	541.2	370.1	285.6	271.5
65°	608.1	465.3	306.7	246.9	241.5
67.5°	537.6	394.8	246.9	216.8	211.5
70°	463.6	326.1	204.4	186.8	179.7
72.5°	393.1	262.6	171.0	156.9	153.4
75°	324.3	200.9	141.0	128.7	127.0
77.5°	255.6	142.7	111.1	104.0	100.4
80°	192.1	102.3	84.5	77.6	77.6
82.5°	133.9	68.8	58.2	54.6	54.6
85°	75.8	38.7	33.5	33.5	33.5
87.5°	28.3	14.0	14.0	12.3	12.3
90°	2.7	32.3	88.0	82.7	85.4
92.5°	55.7	75.5	78.2	80.9	80.9
95°	131.2	156.4	160.9	160.9	156.4
97.5°	218.4	241.8	251.7	251.7	251.7
100°	319.1	339.7	346.9	346.9	344.2
102.5°	425.1	440.4	450.3	452.9	450.3
105°	541.0	548.2	553.6	558.1	558.1
107.5°	656.0	666.8	666.8	668.6	656.0
110°	767.5	781.8	781.8	781.8	774.7

TEST NUMBER: P903674

CATALOG NUMBER: DFN2DIP-SQ3F0-050D100US830-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	887.9	903.1	900.5	893.2	887.9
115°	1006.5	1020.9	1016.4	1013.7	1006.5
117.5°	1124.3	1144.1	1131.4	1124.3	1117.0
120°	1242.8	1262.6	1242.8	1242.8	1234.8
122.5°	1350.7	1375.8	1363.3	1356.1	1350.7
125°	1464.0	1486.4	1479.2	1471.1	1468.5
127.5°	1574.5	1602.3	1592.4	1581.7	1574.5
130°	1677.8	1710.1	1705.7	1700.3	1690.4
132.5°	1793.8	1818.9	1820.7	1808.2	1800.9
135°	1893.5	1921.4	1926.7	1924.1	1916.8
137.5°	2005.0	2027.4	2031.9	2030.1	2019.3
140°	2102.9	2125.3	2138.0	2138.0	2128.1
142.5°	2203.6	2226.0	2233.2	2235.9	2226.0
145°	2298.8	2316.8	2331.2	2333.8	2323.9
147.5°	2384.2	2406.7	2417.4	2422.0	2412.1
150°	2472.3	2487.6	2497.5	2505.5	2497.5
152.5°	2550.4	2565.7	2578.3	2588.2	2578.3
155°	2628.7	2635.8	2643.9	2656.5	2648.4
157.5°	2696.0	2701.4	2705.9	2723.9	2711.3
160°	2756.3	2761.6	2764.3	2779.6	2768.8
162.5°	2812.0	2812.0	2814.6	2831.7	2819.1
165°	2859.6	2856.8	2856.8	2874.8	2862.3
167.5°	2902.7	2894.6	2894.6	2912.6	2900.0
170°	2935.1	2927.9	2925.2	2943.2	2927.9
172.5°	2957.5	2950.3	2947.6	2965.6	2950.3
175°	2975.5	2968.3	2963.0	2980.9	2965.6
177.5°	2985.4	2978.2	2972.8	2988.0	2972.8
180°	2980.9	2980.9	2980.9	2980.9	2980.9

TEST NUMBER: P903674

CATALOG NUMBER: DFN2DIP-SQ3F0-050D100US830-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.00	8.71	9.10	9.80	11.30	3.96	4.67	5.06	5.76	7.26
	3H	9.66	10.29	10.77	11.40	12.92	5.13	5.77	6.24	6.87	8.39
	4H	10.26	10.86	11.38	11.96	13.49	5.57	6.17	6.69	7.28	8.80
	6H	10.68	11.23	11.80	12.33	13.87	5.88	6.43	7.01	7.54	9.08
	8H	10.80	11.32	11.93	12.44	13.97	5.97	6.49	7.10	7.61	9.14
	12H	10.85	11.35	11.99	12.46	14.02	6.00	6.50	7.14	7.61	9.17
4H	2H	8.00	8.60	9.13	9.70	11.23	4.54	5.14	5.66	6.24	7.77
	3H	9.81	10.31	10.94	11.44	12.98	5.87	6.37	7.00	7.50	9.04
	4H	10.50	10.96	11.63	12.07	13.63	6.41	6.87	7.54	7.98	9.54
	6H	11.00	11.39	12.14	12.53	14.08	6.81	7.21	7.95	8.35	9.90
	8H	11.17	11.54	12.31	12.67	14.24	6.94	7.30	8.08	8.43	10.00
	12H	11.26	11.59	12.41	12.73	14.30	6.99	7.32	8.15	8.47	10.04
8H	4H	10.45	10.82	11.59	11.95	13.52	6.68	7.04	7.82	8.17	9.74
	6H	11.01	11.31	12.17	12.49	14.05	7.18	7.48	8.34	8.66	10.22
	8H	11.22	11.49	12.39	12.64	14.22	7.37	7.63	8.53	8.78	10.37
	12H	11.35	11.58	12.52	12.74	14.35	7.48	7.71	8.65	8.86	10.48
12H	4H	10.40	10.73	11.56	11.88	13.45	6.67	7.01	7.83	8.15	9.72
	6H	10.99	11.25	12.15	12.40	13.99	7.23	7.49	8.40	8.65	10.23
	8H	11.20	11.43	12.37	12.58	14.20	7.43	7.66	8.60	8.81	10.43