

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903683

Luminaire Tested: DFN2DIP-SQ3F0-050D120US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903683
REPORT IS A COMBINATION OF REPORTS P901528 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-050D120US830-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 15203.2 lumens
Efficiency: N/A
Efficacy: 111.5 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 136.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903683

CATALOG NUMBER: DFN2DIP-SQ3F0-050D120US830-RLLONL

Luminous Intensity Polar Plot

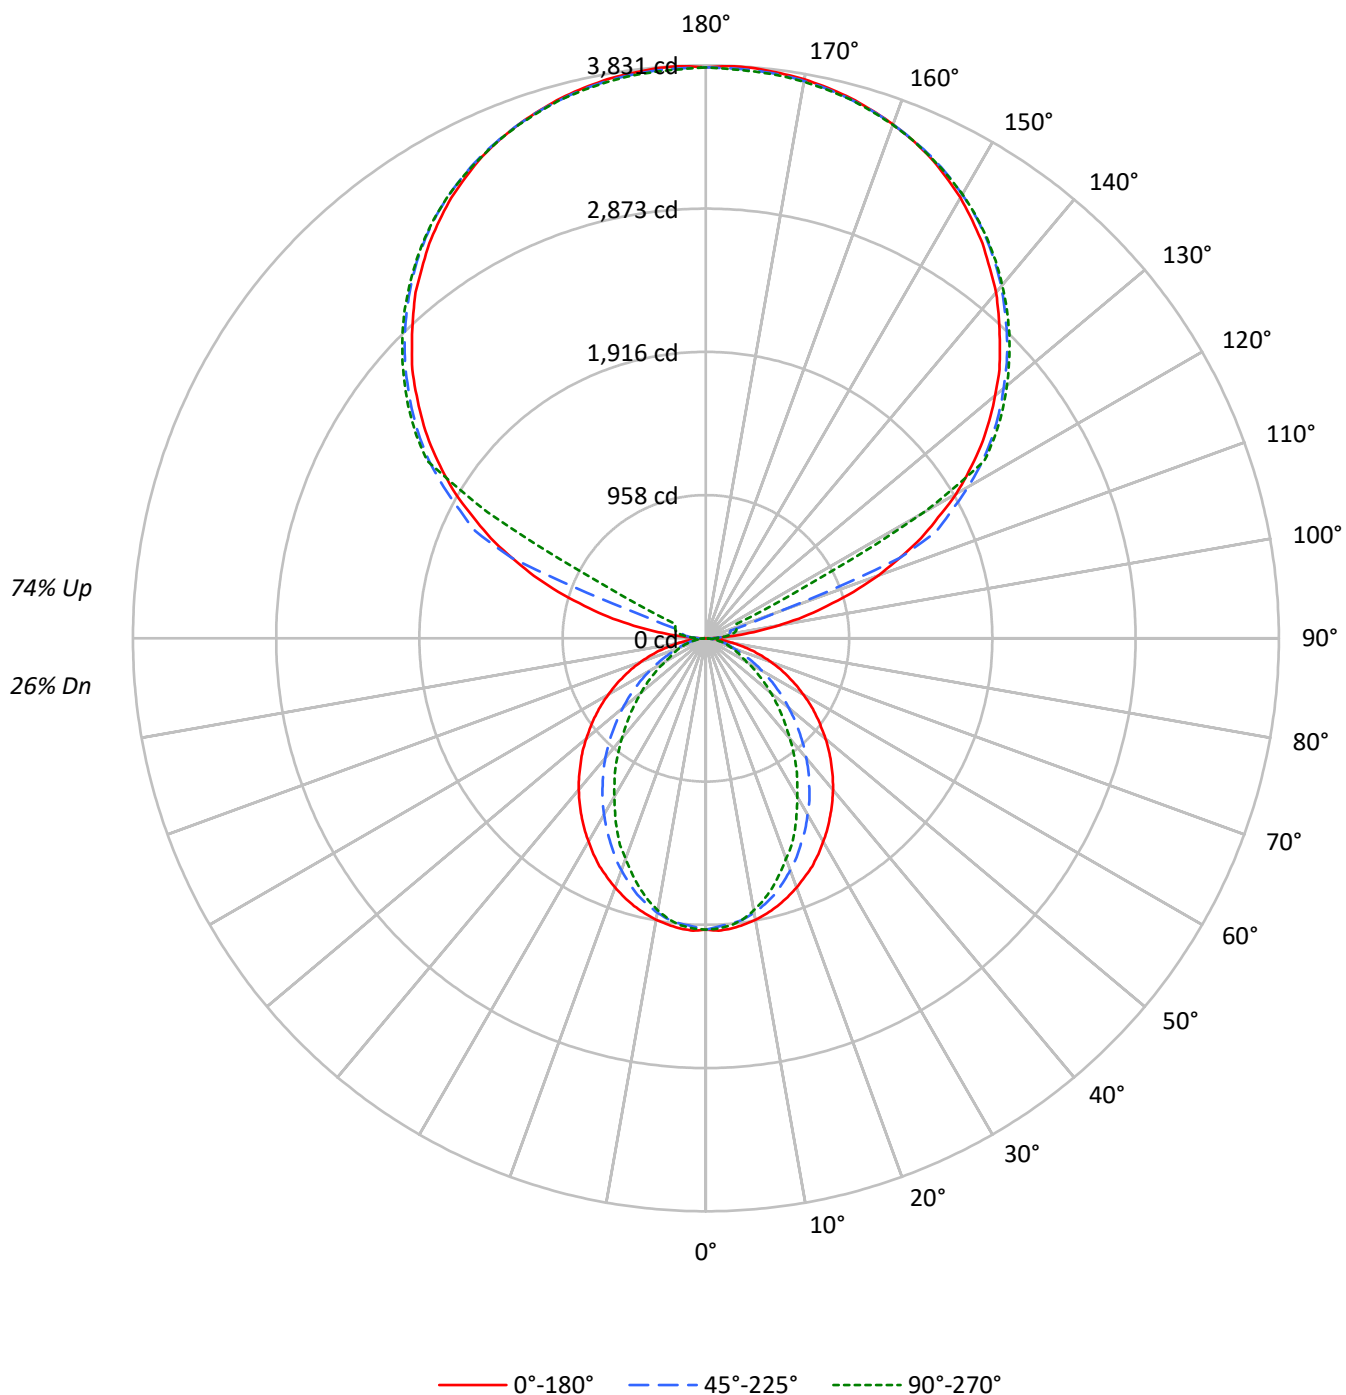

TEST NUMBER: P903683

CATALOG NUMBER: DFN2DIP-SQ3F0-050D120US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	91	91	91	91	70	70	70	52	52	52	34	34	34
1	93	89	85	82	83	79	76	74	62	60	58	46	44	43	31	30	29
2	85	78	72	67	75	70	65	61	54	51	48	40	38	36	27	26	25
3	77	68	62	56	69	61	56	51	48	44	41	36	33	31	24	23	22
4	71	61	53	47	63	54	48	43	43	38	35	32	29	27	22	20	19
5	65	54	46	41	58	49	42	37	38	34	30	29	26	23	20	18	17
6	60	48	41	35	53	44	37	32	35	30	26	26	23	20	18	16	15
7	55	44	36	31	49	39	33	28	31	27	23	24	20	18	17	15	13
8	51	39	32	27	46	36	29	25	28	24	20	22	18	16	15	13	12
9	48	36	29	24	42	33	26	22	26	21	18	20	17	14	14	12	11
10	44	33	26	21	40	30	24	20	24	19	16	18	15	13	13	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2232	2232	2232
5°	2234	2195	2210
10°	2210	2150	2137
15°	2179	2078	2025
20°	2137	1978	1888
25°	2094	1867	1756
30°	2037	1754	1588
35°	1982	1631	1441
40°	1925	1505	1273
45°	1859	1365	1120
50°	1791	1224	971
55°	1719	1074	828
60°	1636	916	681
65°	1541	757	612
70°	1425	608	552
75°	1280	533	501
80°	1070	442	432
85°	726	288	321

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2616 cd/sqm

TEST NUMBER: P903683

CATALOG NUMBER: DFN2DIP-SQ3F0-050D120US830-RLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	182.5	1.2
10°-20°	501.1	3.3
20°-30°	703.6	4.6
30°-40°	766.9	5.0
40°-50°	704.9	4.6
50°-60°	553.6	3.6
60°-70°	360.3	2.4
70°-80°	185.5	1.2
80°-90°	54.1	0.4
90°-100°	125.9	0.8
100°-110°	469.2	3.1
110°-120°	1244.4	8.2
120°-130°	2064.0	13.6
130°-140°	2192.4	14.4
140°-150°	2037.6	13.4
150°-160°	1638.2	10.8
160°-170°	1055.6	6.9
170°-180°	363.3	2.4
0°-30°	1387.2	9.1
0°-40°	2154.2	14.2
0°-60°	3412.7	22.4
0°-90°	4012.5	26.4
90°-120°	1839.5	12.1
90°-150°	8133.6	53.5
90°-180°	11191.0	73.6
0°-180°	15203.2	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1948	1948	1948	1948	1948	
5°	1948	1939	1916	1932	1927	185
15°	1853	1833	1773	1740	1722	522
25°	1682	1625	1509	1437	1410	773
35°	1449	1359	1204	1093	1054	907
45°	1185	1066	881	756	714	915
55°	901	763	573	467	434	805
65°	608	465	307	247	242	603
75°	324	201	141	129	127	343
85°	76	39	34	34	34	87
90°	3	33	55	69	74	14
95°	179	88	108	122	119	212
105°	840	923	169	199	210	897
115°	1588	1635	1704	425	227	1563
125°	2245	2282	2334	2353	2362	2003
135°	2779	2823	2848	2876	2870	2146
145°	3224	3221	3267	3287	3273	2016
155°	3549	3524	3558	3574	3552	1635
165°	3740	3723	3732	3751	3732	1057
175°	3825	3806	3812	3831	3803	364
180°	3817	3817	3817	3817	3817	

TEST NUMBER: P903683

CATALOG NUMBER: DFN2DIP-SQ3F0-050D120US830-RLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1947.8	1947.8	1947.8	1947.8	1947.8
2.5°	1956.5	1947.8	1928.3	1946.1	1942.5
5°	1947.8	1939.0	1916.0	1931.8	1926.7
7.5°	1931.8	1921.4	1896.7	1903.7	1894.8
10°	1910.7	1898.4	1863.2	1857.8	1847.3
12.5°	1884.3	1868.5	1820.8	1810.3	1790.8
15°	1852.6	1833.2	1773.3	1739.8	1722.2
17.5°	1815.5	1787.3	1713.3	1674.5	1646.2
20°	1773.3	1738.0	1649.8	1605.9	1567.0
22.5°	1727.5	1686.9	1584.6	1524.8	1498.4
25°	1681.6	1625.1	1508.8	1436.6	1410.0
27.5°	1627.0	1567.0	1438.3	1355.5	1314.9
30°	1568.9	1501.8	1360.7	1270.9	1223.2
32.5°	1512.4	1431.3	1286.9	1181.0	1136.9
35°	1449.0	1359.1	1204.0	1092.9	1054.0
37.5°	1387.2	1290.2	1126.4	1004.7	960.7
40°	1322.0	1216.4	1045.2	920.1	874.3
42.5°	1255.1	1142.3	964.2	833.7	789.8
45°	1184.6	1066.4	881.4	756.1	713.8
47.5°	1117.6	992.5	802.1	676.8	638.1
50°	1043.6	918.4	724.5	602.8	565.9
52.5°	971.2	839.0	650.4	534.1	500.7
55°	900.7	763.2	572.8	467.1	433.7
57.5°	828.5	687.5	504.2	405.5	377.2
60°	754.4	613.4	431.8	342.0	313.8
62.5°	682.2	541.2	370.1	285.6	271.5
65°	608.1	465.3	306.7	246.9	241.5
67.5°	537.6	394.8	246.9	216.8	211.5
70°	463.6	326.1	204.4	186.8	179.7
72.5°	393.1	262.6	171.0	156.9	153.4
75°	324.3	200.9	141.0	128.7	127.0
77.5°	255.6	142.7	111.1	104.0	100.4
80°	192.1	102.3	84.5	77.6	77.6
82.5°	133.9	68.8	58.2	54.6	54.6
85°	75.8	38.7	33.5	33.5	33.5
87.5°	28.3	14.0	14.0	12.3	12.3
90°	2.6	33.1	55.1	69.2	74.5
92.5°	69.2	58.1	66.3	71.8	74.5
95°	179.4	88.2	107.5	121.7	118.8
97.5°	323.1	96.8	140.7	149.2	151.8
100°	489.0	110.6	157.4	179.4	185.0
102.5°	671.1	665.8	163.0	193.2	201.7
105°	839.6	922.7	168.6	198.8	209.9
107.5°	1035.8	1104.7	174.2	204.3	215.5
110°	1223.7	1281.5	483.4	207.3	218.1

TEST NUMBER: P903683

CATALOG NUMBER: DFN2DIP-SQ3F0-050D120US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1400.5	1450.0	1403.2	212.5	221.0
115°	1588.1	1635.0	1704.2	425.4	226.7
117.5°	1751.1	1806.3	1853.5	1458.2	734.7
120°	1933.5	1974.8	2024.7	2057.9	1684.9
122.5°	2088.0	2132.3	2187.7	2204.1	2207.1
125°	2245.4	2281.5	2334.0	2353.3	2361.5
127.5°	2389.1	2427.8	2469.5	2497.0	2499.6
130°	2524.5	2568.8	2599.0	2629.5	2626.9
132.5°	2662.6	2698.7	2728.8	2753.8	2751.2
135°	2778.7	2823.0	2847.6	2875.5	2869.9
137.5°	2900.1	2933.2	2961.1	2988.6	2980.4
140°	3018.9	3041.1	3071.3	3096.3	3082.5
142.5°	3118.5	3137.9	3173.6	3195.6	3181.8
145°	3223.5	3220.6	3267.4	3286.8	3273.0
147.5°	3314.4	3306.2	3353.1	3366.9	3356.0
150°	3402.9	3383.5	3427.8	3444.2	3430.5
152.5°	3477.3	3455.4	3496.7	3513.4	3494.1
155°	3549.1	3524.5	3557.7	3574.1	3552.2
157.5°	3607.2	3585.2	3610.2	3629.5	3607.2
160°	3657.1	3640.4	3657.1	3673.5	3654.1
162.5°	3701.1	3684.7	3698.4	3717.8	3692.9
165°	3739.7	3723.3	3731.5	3750.9	3731.5
167.5°	3770.3	3753.5	3762.1	3781.4	3756.5
170°	3795.1	3778.5	3784.0	3803.3	3778.5
172.5°	3811.5	3795.1	3800.8	3820.1	3795.1
175°	3825.3	3806.0	3811.5	3831.0	3803.3
177.5°	3831.0	3811.5	3814.6	3833.9	3809.0
180°	3817.2	3817.2	3817.2	3817.2	3817.2

TEST NUMBER: P903683

CATALOG NUMBER: DFN2DIP-SQ3F0-050D120US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.15	7.82	8.29	8.94	10.52	3.11	3.78	4.25	4.91	6.48
	3H	8.81	9.41	9.96	10.54	12.13	4.28	4.88	5.43	6.01	7.60
	4H	9.41	9.97	10.56	11.11	12.71	4.72	5.28	5.87	6.42	8.02
	6H	9.82	10.34	10.98	11.48	13.08	5.02	5.55	6.19	6.68	8.29
	8H	9.94	10.43	11.10	11.59	13.18	5.11	5.60	6.27	6.76	8.35
	12H	9.99	10.46	11.16	11.61	13.23	5.14	5.61	6.31	6.76	8.38
4H	2H	7.14	7.71	8.31	8.85	10.44	3.68	4.25	4.85	5.39	6.98
	3H	8.95	9.43	10.12	10.59	12.19	5.01	5.48	6.18	6.64	8.25
	4H	9.64	10.07	10.81	11.22	12.85	5.55	5.98	6.72	7.13	8.76
	6H	10.14	10.51	11.31	11.68	13.30	5.95	6.32	7.13	7.49	9.11
	8H	10.31	10.65	11.48	11.82	13.45	6.07	6.42	7.25	7.58	9.22
	12H	10.39	10.71	11.58	11.88	13.52	6.13	6.44	7.32	7.62	9.25
8H	4H	9.59	9.94	10.77	11.10	12.73	5.81	6.16	6.99	7.32	8.96
	6H	10.14	10.43	11.34	11.64	13.27	6.32	6.60	7.51	7.81	9.44
	8H	10.36	10.61	11.56	11.79	13.44	6.50	6.75	7.70	7.93	9.58
	12H	10.49	10.70	11.69	11.89	13.57	6.61	6.83	7.81	8.01	9.69
12H	4H	9.53	9.85	10.73	11.02	12.66	5.81	6.12	7.00	7.30	8.94
	6H	10.12	10.37	11.32	11.55	13.20	6.36	6.61	7.56	7.80	9.45
	8H	10.33	10.55	11.53	11.73	13.41	6.56	6.78	7.76	7.96	9.64