

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903711

Luminaire Tested: DFN2DIP-SQ3F0-060D100US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903711
REPORT IS A COMBINATION OF REPORTS P901494 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-060D100US830-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 14138.1 lumens
Efficiency: N/A
Efficacy: 108.0 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 130.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9971
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903711

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US830-RLLONL

Luminous Intensity Polar Plot

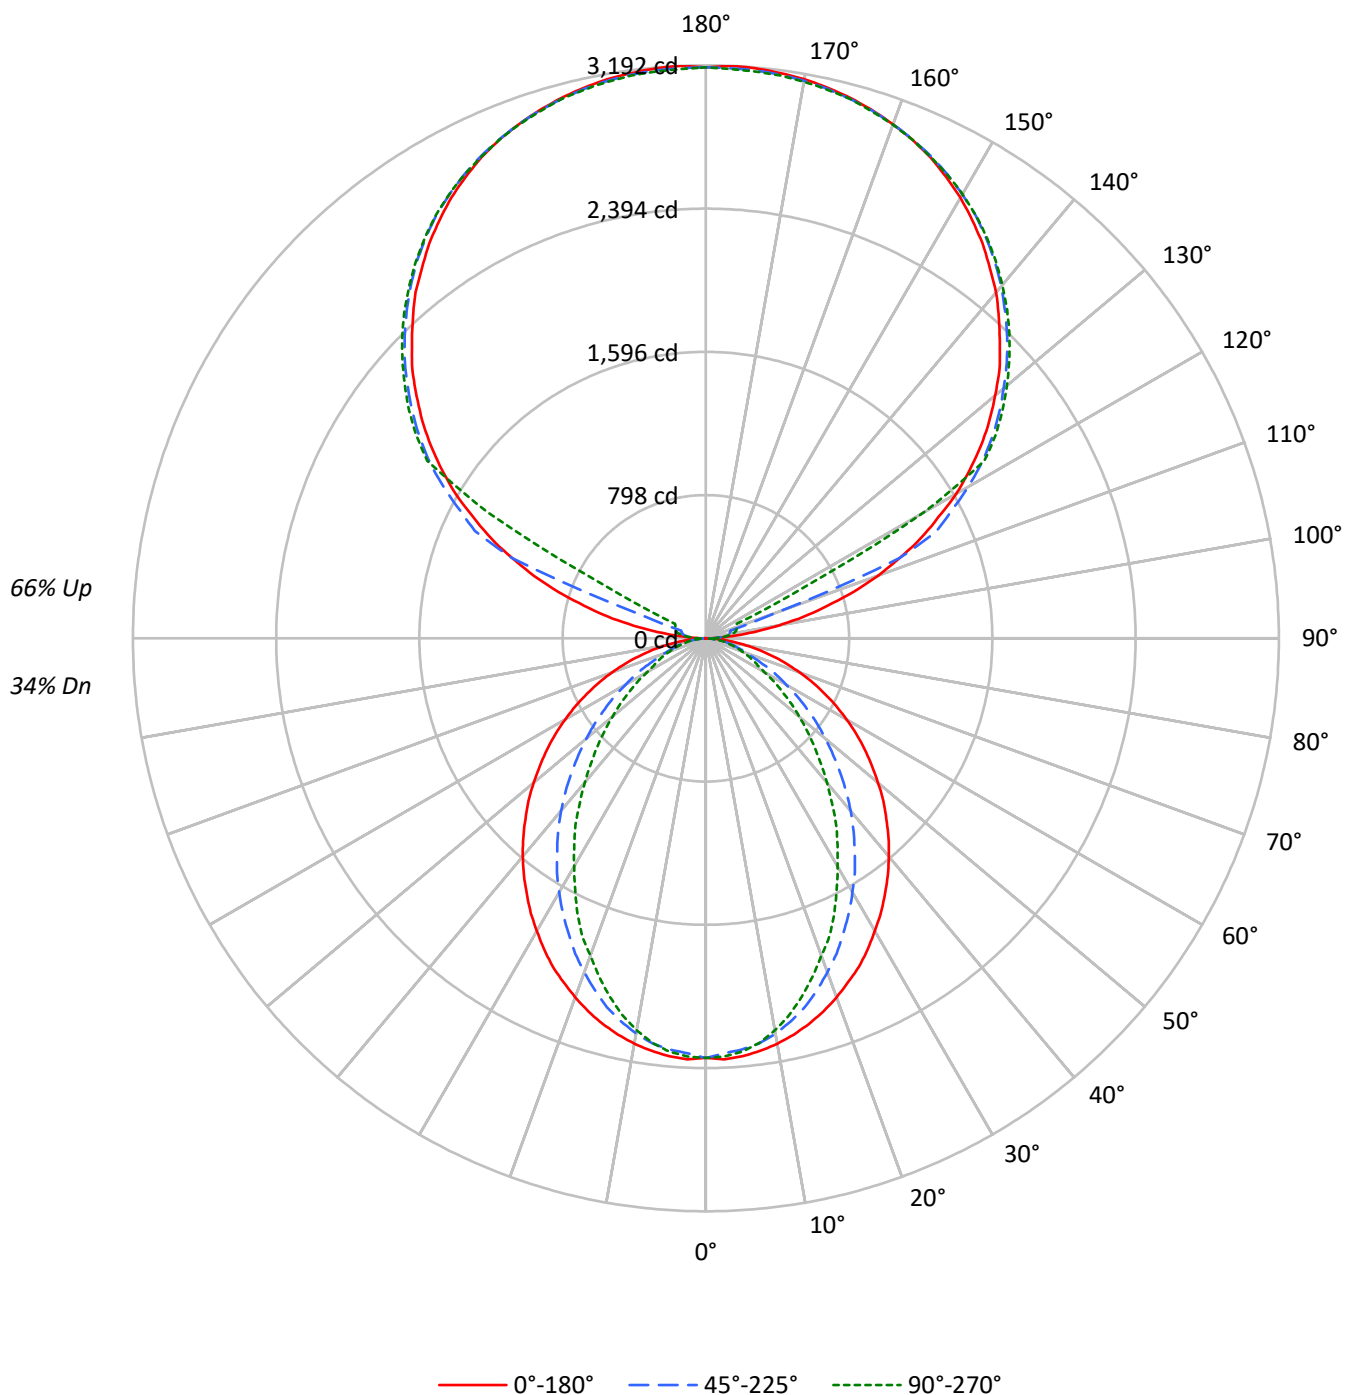

TEST NUMBER: P903711

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	103	103	103	103	93	93	93	93	74	74	74	57	57	57	41	41	41
1	95	90	87	83	85	82	79	76	66	64	62	51	49	48	37	36	36
2	86	79	74	69	78	72	67	63	58	54	52	45	43	41	33	32	30
3	79	70	63	58	71	63	58	53	51	47	44	40	37	35	30	28	26
4	72	62	55	49	65	56	50	45	46	41	37	36	33	30	27	25	23
5	66	55	48	42	60	50	44	39	41	36	32	32	29	26	24	22	20
6	61	50	42	36	55	45	39	34	37	32	28	29	26	23	22	20	18
7	57	45	37	32	51	41	34	30	34	29	25	27	23	20	20	18	16
8	52	41	33	28	47	37	31	26	31	26	22	24	21	18	19	16	14
9	49	37	30	25	44	34	28	23	28	23	20	22	19	16	17	15	13
10	46	34	27	22	41	31	25	21	26	21	18	21	17	15	16	14	12

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2678	2678	2678
5°	2681	2634	2652
10°	2652	2580	2564
15°	2614	2493	2430
20°	2564	2374	2266
25°	2513	2241	2107
30°	2445	2104	1906
35°	2378	1958	1730
40°	2310	1806	1527
45°	2230	1638	1344
50°	2149	1469	1165
55°	2063	1288	993
60°	1964	1100	817
65°	1849	908	734
70°	1710	729	663
75°	1536	639	601
80°	1283	530	518
85°	870	346	385

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2230 cd/sqm

TEST NUMBER: P903711

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	219.1	1.5
10°-20°	601.3	4.3
20°-30°	844.3	6.0
30°-40°	920.3	6.5
40°-50°	845.9	6.0
50°-60°	664.3	4.7
60°-70°	432.4	3.1
70°-80°	222.6	1.6
80°-90°	62.4	0.4
90°-100°	104.9	0.7
100°-110°	391.0	2.8
110°-120°	1037.0	7.3
120°-130°	1720.0	12.2
130°-140°	1827.0	12.9
140°-150°	1698.0	12.0
150°-160°	1365.2	9.7
160°-170°	879.7	6.2
170°-180°	302.8	2.1
0°-30°	1664.7	11.8
0°-40°	2585.0	18.3
0°-60°	4095.1	29.0
0°-90°	4812.5	34.0
90°-120°	1532.9	10.8
90°-150°	6778.0	47.9
90°-180°	9326.0	66.0
0°-180°	14138.1	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2337	2337	2337	2337	2337	
5°	2337	2327	2299	2318	2312	222
15°	2223	2200	2128	2088	2067	626
25°	2018	1950	1811	1724	1692	928
35°	1739	1631	1445	1312	1265	1088
45°	1421	1280	1058	907	857	1098
55°	1081	916	687	561	520	966
65°	730	558	368	296	290	724
75°	389	241	169	154	152	412
85°	91	46	40	40	40	104
90°	2	28	46	58	62	13
95°	150	74	90	101	99	177
105°	700	769	140	166	175	748
115°	1323	1362	1420	354	189	1303
125°	1871	1901	1945	1961	1968	1669
135°	2316	2352	2373	2396	2392	1789
145°	2686	2684	2723	2739	2728	1680
155°	2958	2937	2965	2978	2960	1363
165°	3116	3103	3110	3126	3110	880
175°	3188	3172	3176	3192	3170	303
180°	3181	3181	3181	3181	3181	

TEST NUMBER: P903711

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US830-RLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2337.3	2337.3	2337.3	2337.3	2337.3
2.5°	2347.9	2337.3	2313.9	2335.2	2331.0
5°	2337.3	2326.8	2299.1	2318.3	2312.0
7.5°	2318.3	2305.6	2276.1	2284.3	2273.8
10°	2292.8	2278.0	2235.9	2229.4	2216.8
12.5°	2261.3	2242.1	2184.9	2172.4	2149.0
15°	2223.1	2199.7	2127.9	2087.7	2066.6
17.5°	2178.7	2144.8	2055.9	2009.4	1975.6
20°	2127.9	2085.5	1979.8	1927.0	1880.4
22.5°	2072.9	2024.2	1901.5	1829.7	1798.0
25°	2018.0	1950.2	1810.6	1724.0	1692.1
27.5°	1952.5	1880.4	1726.0	1626.5	1577.9
30°	1882.6	1802.0	1632.9	1525.1	1467.9
32.5°	1814.9	1717.5	1544.3	1417.2	1364.2
35°	1738.8	1630.9	1444.8	1311.5	1264.8
37.5°	1664.7	1548.2	1351.7	1205.6	1152.8
40°	1586.4	1459.6	1254.2	1104.1	1049.1
42.5°	1506.1	1370.7	1157.1	1000.4	947.7
45°	1421.4	1279.6	1057.7	907.3	856.6
47.5°	1341.1	1191.0	962.5	812.2	765.7
50°	1252.3	1102.1	869.4	723.3	679.1
52.5°	1165.4	1006.7	780.5	640.9	600.8
55°	1080.8	915.9	687.4	560.6	520.4
57.5°	994.2	824.9	605.0	486.5	452.6
60°	905.3	736.1	518.2	410.5	376.5
62.5°	818.7	649.5	444.1	342.7	325.8
65°	729.8	558.4	368.1	296.2	289.7
67.5°	645.2	473.7	296.2	260.1	253.8
70°	556.3	391.3	245.2	224.2	215.7
72.5°	471.7	315.1	205.1	188.3	184.0
75°	389.2	241.0	169.2	154.4	152.4
77.5°	306.8	171.3	133.3	124.8	120.6
80°	230.5	122.7	101.4	93.1	93.1
82.5°	160.7	82.6	69.7	65.5	65.5
85°	90.9	46.5	40.2	40.2	40.2
87.5°	33.9	16.9	16.9	14.8	14.8
90°	2.2	27.6	45.9	57.7	62.0
92.5°	57.7	48.4	55.2	59.9	62.0
95°	149.5	73.5	89.6	101.4	99.0
97.5°	269.2	80.6	117.3	124.3	126.6
100°	407.6	92.1	131.2	149.5	154.2
102.5°	559.2	554.9	135.8	161.0	168.1
105°	699.7	768.8	140.5	165.6	174.9
107.5°	863.2	920.6	145.2	170.3	179.6
110°	1019.7	1067.9	402.8	172.8	181.7

TEST NUMBER: P903711

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1167.1	1208.3	1169.3	177.1	184.3
115°	1323.4	1362.5	1420.2	354.5	188.9
117.5°	1459.2	1505.2	1544.5	1215.2	612.3
120°	1611.3	1645.7	1687.2	1714.9	1404.1
122.5°	1740.0	1776.9	1823.1	1836.7	1839.2
125°	1871.2	1901.3	1945.0	1961.1	1967.9
127.5°	1990.9	2023.2	2057.9	2080.9	2083.0
130°	2103.8	2140.7	2165.9	2191.2	2189.1
132.5°	2218.8	2248.9	2274.1	2294.8	2292.6
135°	2315.6	2352.5	2373.0	2396.2	2391.6
137.5°	2416.8	2444.4	2467.6	2490.6	2483.7
140°	2515.6	2534.3	2559.4	2580.2	2568.7
142.5°	2598.8	2614.9	2644.7	2663.0	2651.6
145°	2686.2	2683.8	2722.9	2739.0	2727.5
147.5°	2761.9	2755.1	2794.2	2805.7	2796.7
150°	2835.7	2819.6	2856.6	2870.2	2858.7
152.5°	2897.8	2879.5	2914.0	2927.8	2911.7
155°	2957.7	2937.2	2964.8	2978.4	2960.1
157.5°	3006.1	2987.8	3008.5	3024.6	3006.1
160°	3047.6	3033.7	3047.6	3061.3	3045.2
162.5°	3084.2	3070.5	3082.0	3098.1	3077.4
165°	3116.4	3102.8	3109.6	3125.8	3109.6
167.5°	3141.9	3127.9	3135.1	3151.2	3130.4
170°	3162.6	3148.8	3153.4	3169.5	3148.8
172.5°	3176.3	3162.6	3167.3	3183.4	3162.6
175°	3187.8	3171.7	3176.3	3192.5	3169.5
177.5°	3192.5	3176.3	3178.8	3194.9	3174.1
180°	3181.0	3181.0	3181.0	3181.0	3181.0

TEST NUMBER: P903711

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	8.83	9.55	9.92	10.63	12.11	4.79	5.51	5.88	6.59	8.07
	3H	10.49	11.13	11.59	12.23	13.73	5.96	6.60	7.06	7.70	9.20
	4H	11.09	11.70	12.20	12.79	14.30	6.40	7.01	7.51	8.10	9.61
	6H	11.51	12.06	12.62	13.16	14.68	6.71	7.27	7.83	8.37	9.89
	8H	11.63	12.16	12.75	13.27	14.78	6.80	7.33	7.92	8.44	9.95
	12H	11.68	12.19	12.81	13.29	14.83	6.84	7.34	7.96	8.44	9.98
4H	2H	8.83	9.44	9.95	10.53	12.04	5.37	5.98	6.48	7.07	8.58
	3H	10.65	11.15	11.77	12.27	13.79	6.70	7.21	7.82	8.33	9.85
	4H	11.33	11.79	12.45	12.90	14.44	7.24	7.70	8.36	8.81	10.35
	6H	11.83	12.23	12.97	13.36	14.90	7.65	8.04	8.78	9.18	10.71
	8H	12.00	12.37	13.14	13.50	15.05	7.77	8.14	8.90	9.26	10.81
	12H	12.09	12.43	13.24	13.56	15.12	7.83	8.16	8.97	9.30	10.85
8H	4H	11.29	11.66	12.42	12.78	14.33	7.51	7.88	8.64	9.00	10.55
	6H	11.84	12.15	13.00	13.32	14.86	8.01	8.32	9.17	9.49	11.03
	8H	12.06	12.32	13.21	13.47	15.04	8.20	8.47	9.36	9.61	11.18
	12H	12.19	12.42	13.35	13.56	15.17	8.31	8.54	9.47	9.69	11.29
12H	4H	11.23	11.57	12.38	12.71	14.26	7.51	7.84	8.66	8.98	10.53
	6H	11.82	12.08	12.98	13.23	14.80	8.06	8.33	9.22	9.48	11.04
	8H	12.03	12.26	13.19	13.41	15.01	8.26	8.50	9.42	9.64	11.24