

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903723

Luminaire Tested: DFN2DIP-SQ3F0-070D040US830-RLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903723
REPORT IS A COMBINATION OF REPORTS P901388 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-070D040US830-RLLONL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 9340.6 lumens
Efficiency: N/A
Efficacy: 97.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 95.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903723

CATALOG NUMBER: DFN2DIP-SQ3F0-070D040US830-RLLONL

Luminous Intensity Polar Plot

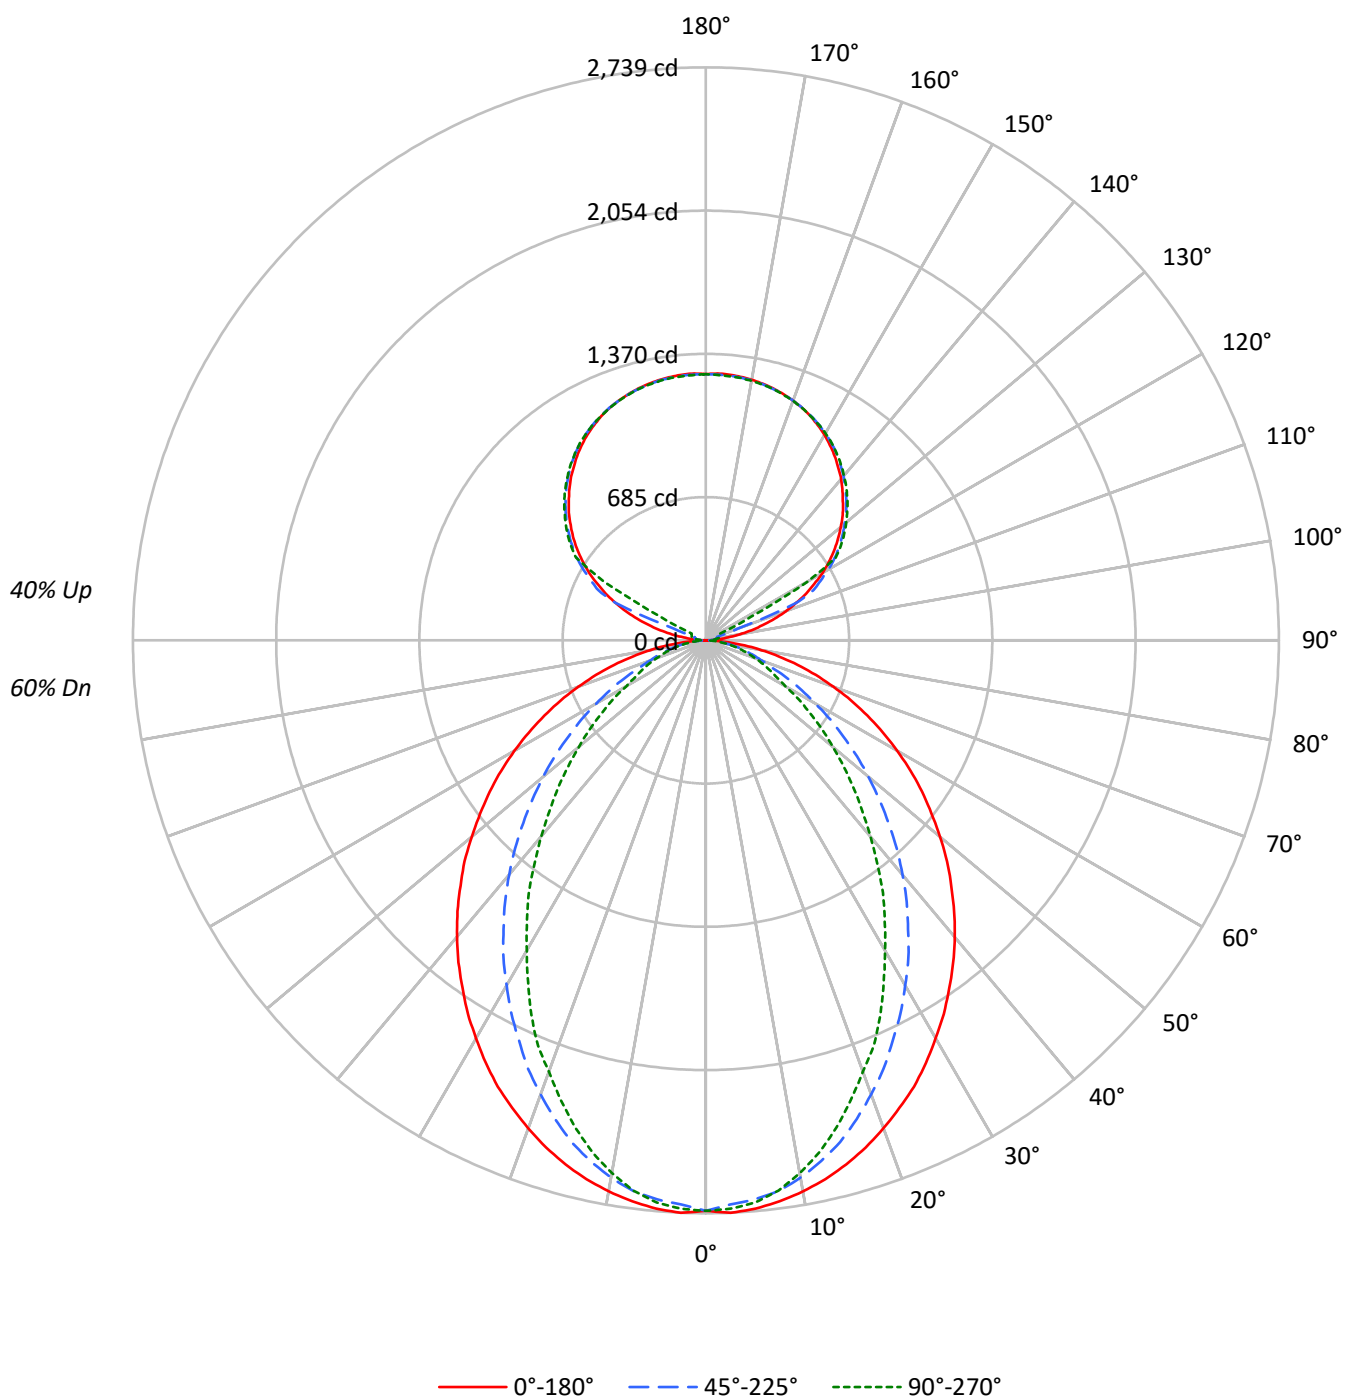

TEST NUMBER: P903723

CATALOG NUMBER: DFN2DIP-SQ3F0-070D040US830-RLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	110	110	110	110	102	102	102	102	89	89	89		77	77	77		65
1	101	96	93	89	94	90	87	84	79	77	74		68	67	65		59
2	92	85	79	74	86	80	74	70	70	66	62		61	58	55		52
3	84	75	68	62	79	71	64	59	62	57	53		54	51	47		47
4	78	67	59	53	72	63	56	51	56	50	46		49	45	41		42
5	71	60	52	46	67	57	49	44	50	44	40		44	40	36		38
6	66	54	46	40	62	51	44	39	45	40	35		40	35	32		35
7	61	49	41	36	57	46	39	34	41	36	31		37	32	29		32
8	57	45	37	32	53	42	35	31	38	32	28		34	29	26		30
9	53	41	34	29	50	39	32	28	35	29	25		31	27	23		28
10	50	38	31	26	47	36	29	25	32	27	23		29	24	21		26

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3124	3124	3124
5°	3127	3073	3094
10°	3094	3010	2992
15°	3050	2909	2835
20°	2992	2770	2644
25°	2932	2614	2458
30°	2852	2455	2224
35°	2774	2284	2018
40°	2695	2107	1782
45°	2602	1911	1568
50°	2507	1714	1359
55°	2407	1503	1159
60°	2291	1283	953
65°	2157	1059	856
70°	1995	851	774
75°	1792	746	702
80°	1497	619	605
85°	1015	403	448

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2602 cd/sqm

TEST NUMBER: P903723

CATALOG NUMBER: DFN2DIP-SQ3F0-070D040US830-RLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	255.6	2.7
10°-20°	701.6	7.5
20°-30°	985.0	10.5
30°-40°	1073.7	11.5
40°-50°	986.9	10.6
50°-60°	775.0	8.3
60°-70°	504.5	5.4
70°-80°	259.7	2.8
80°-90°	68.5	0.7
90°-100°	41.9	0.4
100°-110°	156.4	1.7
110°-120°	414.8	4.4
120°-130°	688.0	7.4
130°-140°	730.8	7.8
140°-150°	679.2	7.3
150°-160°	546.1	5.8
160°-170°	351.9	3.8
170°-180°	121.1	1.3
0°-30°	1942.1	20.8
0°-40°	3015.8	32.3
0°-60°	4777.7	51.1
0°-90°	5610.3	60.1
90°-120°	613.2	6.6
90°-150°	2711.2	29.0
90°-180°	3730.0	39.9
0°-180°	9340.6	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2727	2727	2727	2727	2727	
5°	2727	2714	2682	2705	2697	259
15°	2594	2566	2483	2436	2411	731
25°	2354	2275	2112	2011	1974	1083
35°	2028	1903	1686	1530	1476	1270
45°	1658	1493	1234	1059	999	1281
55°	1261	1068	802	654	607	1127
65°	851	651	429	346	338	844
75°	454	281	197	180	178	480
85°	106	54	47	47	47	122
90°	1	11	18	23	25	9
95°	60	29	36	40	40	71
105°	280	308	56	66	70	299
115°	529	545	568	142	76	521
125°	748	760	778	784	787	668
135°	926	941	949	958	957	715
145°	1074	1074	1089	1096	1091	672
155°	1183	1175	1186	1191	1184	545
165°	1247	1241	1244	1250	1244	352
175°	1275	1269	1270	1277	1268	121
180°	1272	1272	1272	1272	1272	

TEST NUMBER: P903723

CATALOG NUMBER: DFN2DIP-SQ3F0-070D040US830-RLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2726.9	2726.9	2726.9	2726.9	2726.9
2.5°	2739.1	2726.9	2699.6	2724.5	2719.5
5°	2726.9	2714.5	2682.4	2704.6	2697.3
7.5°	2704.6	2689.9	2655.4	2665.0	2652.8
10°	2675.0	2657.8	2608.5	2600.9	2586.2
12.5°	2638.1	2615.8	2549.1	2534.4	2507.2
15°	2593.6	2566.4	2482.6	2435.7	2411.1
17.5°	2541.8	2502.3	2398.6	2344.3	2304.8
20°	2482.6	2433.1	2309.8	2248.2	2193.8
22.5°	2418.5	2361.6	2218.4	2134.6	2097.7
25°	2354.3	2275.2	2112.3	2011.3	1974.2
27.5°	2277.8	2193.8	2013.6	1897.7	1840.9
30°	2196.4	2102.4	1905.0	1779.3	1712.6
32.5°	2117.3	2003.8	1801.6	1653.4	1591.6
35°	2028.5	1902.6	1685.6	1530.1	1475.6
37.5°	1942.2	1806.3	1577.0	1406.5	1345.0
40°	1850.8	1702.9	1463.3	1288.2	1224.0
42.5°	1757.1	1599.2	1349.9	1167.2	1105.7
45°	1658.4	1492.9	1234.0	1058.6	999.4
47.5°	1564.6	1389.5	1122.9	947.5	893.3
50°	1460.9	1285.8	1014.3	843.9	792.3
52.5°	1359.6	1174.5	910.6	747.7	700.9
55°	1260.9	1068.5	801.9	654.0	607.2
57.5°	1159.9	962.4	705.9	567.6	528.1
60°	1056.2	858.8	604.5	478.9	439.3
62.5°	955.1	757.7	518.1	399.8	380.1
65°	851.4	651.4	429.4	345.6	338.0
67.5°	752.7	552.7	345.6	303.4	296.1
70°	649.0	456.6	286.2	261.6	251.6
72.5°	550.4	367.6	239.3	219.7	214.7
75°	454.0	281.2	197.4	180.1	177.8
77.5°	357.9	199.7	155.5	145.5	140.6
80°	268.9	143.2	118.4	108.7	108.7
82.5°	187.5	96.3	81.4	76.4	76.4
85°	106.0	54.2	46.8	46.8	46.8
87.5°	39.5	19.6	19.6	17.2	17.2
90°	0.8	11.0	18.4	23.1	24.8
92.5°	23.1	19.3	22.1	23.9	24.8
95°	59.8	29.4	35.8	40.5	39.6
97.5°	107.7	32.2	46.9	49.8	50.6
100°	163.0	36.9	52.5	59.8	61.6
102.5°	223.7	222.0	54.3	64.4	67.2
105°	279.8	307.6	56.2	66.3	69.9
107.5°	345.3	368.3	58.1	68.1	71.8
110°	407.9	427.2	161.2	69.1	72.7

TEST NUMBER: P903723

CATALOG NUMBER: DFN2DIP-SQ3F0-070D040US830-RLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	466.8	483.3	467.7	70.9	73.7
115°	529.3	545.0	568.1	141.8	75.6
117.5°	583.7	602.1	617.8	486.1	244.9
120°	644.5	658.3	674.9	686.0	561.7
122.5°	696.0	710.8	729.2	734.7	735.7
125°	748.5	760.5	778.0	784.5	787.2
127.5°	796.4	809.3	823.1	832.4	833.2
130°	841.5	856.3	866.3	876.5	875.6
132.5°	887.5	899.6	909.6	917.9	917.1
135°	926.2	941.0	949.2	958.5	956.7
137.5°	966.7	977.7	987.0	996.2	993.4
140°	1006.3	1013.7	1023.8	1032.1	1027.5
142.5°	1039.5	1045.9	1057.9	1065.2	1060.6
145°	1074.5	1073.6	1089.1	1095.6	1091.0
147.5°	1104.8	1102.0	1117.7	1122.3	1118.7
150°	1134.3	1127.8	1142.6	1148.1	1143.5
152.5°	1159.1	1151.8	1165.5	1171.1	1164.7
155°	1183.1	1174.9	1185.9	1191.4	1184.0
157.5°	1202.4	1195.0	1203.4	1209.8	1202.4
160°	1219.0	1213.4	1219.0	1224.5	1218.0
162.5°	1233.7	1228.2	1232.8	1239.3	1231.0
165°	1246.6	1241.1	1243.9	1250.3	1243.9
167.5°	1256.8	1251.1	1254.1	1260.5	1252.2
170°	1265.1	1259.5	1261.3	1267.8	1259.5
172.5°	1270.5	1265.1	1267.0	1273.4	1265.1
175°	1275.1	1268.7	1270.5	1277.0	1267.8
177.5°	1277.0	1270.5	1271.5	1278.0	1269.7
180°	1272.4	1272.4	1272.4	1272.4	1272.4

TEST NUMBER: P903723

CATALOG NUMBER: DFN2DIP-SQ3F0-070D040US830-RLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.96	12.88	12.84	13.77	14.89	7.92	8.84	8.80	9.73	10.85
	3H	13.64	14.46	14.53	15.36	16.51	9.11	9.93	10.00	10.83	11.98
	4H	14.25	15.03	15.15	15.93	17.09	9.56	10.34	10.46	11.24	12.40
	6H	14.67	15.39	15.59	16.30	17.47	9.88	10.60	10.79	11.51	12.68
	8H	14.80	15.48	15.72	16.41	17.58	9.97	10.65	10.89	11.58	12.75
	12H	14.86	15.51	15.79	16.43	17.63	10.01	10.66	10.94	11.58	12.78
4H	2H	11.99	12.77	12.90	13.67	14.83	8.53	9.30	9.43	10.21	11.37
	3H	13.82	14.47	14.74	15.40	16.58	9.88	10.52	10.79	11.46	12.63
	4H	14.51	15.10	15.44	16.03	17.23	10.42	11.01	11.35	11.94	13.14
	6H	15.03	15.53	15.97	16.49	17.69	10.84	11.35	11.78	12.30	13.50
	8H	15.20	15.68	16.15	16.62	17.84	10.97	11.44	11.91	12.39	13.60
	12H	15.30	15.72	16.26	16.69	17.91	11.03	11.46	11.99	12.42	13.64
8H	4H	14.49	14.96	15.43	15.91	17.12	10.71	11.18	11.65	12.13	13.34
	6H	15.05	15.44	16.02	16.43	17.64	11.22	11.61	12.19	12.60	13.81
	8H	15.26	15.61	16.24	16.59	17.82	11.41	11.75	12.39	12.73	13.96
	12H	15.40	15.71	16.38	16.68	17.96	11.52	11.83	12.50	12.80	14.08
12H	4H	14.44	14.87	15.40	15.83	17.05	10.72	11.14	11.68	12.11	13.33
	6H	15.03	15.37	16.00	16.35	17.58	11.27	11.61	12.25	12.59	13.82
	8H	15.25	15.55	16.23	16.52	17.80	11.48	11.78	12.46	12.75	14.03