

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903729

Luminaire Tested: DFN2DIP-SQ3F0-070D060US830-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903729
REPORT IS A COMBINATION OF REPORTS P901423 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-070D060US830-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 12130.5 lumens
Efficiency: N/A
Efficacy: 109.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 110.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9963
Total Harmonic Distortion (THDi): 0.065
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903729

CATALOG NUMBER: DFN2DIP-SQ3F0-070D060US830-FLLONL

Luminous Intensity Polar Plot

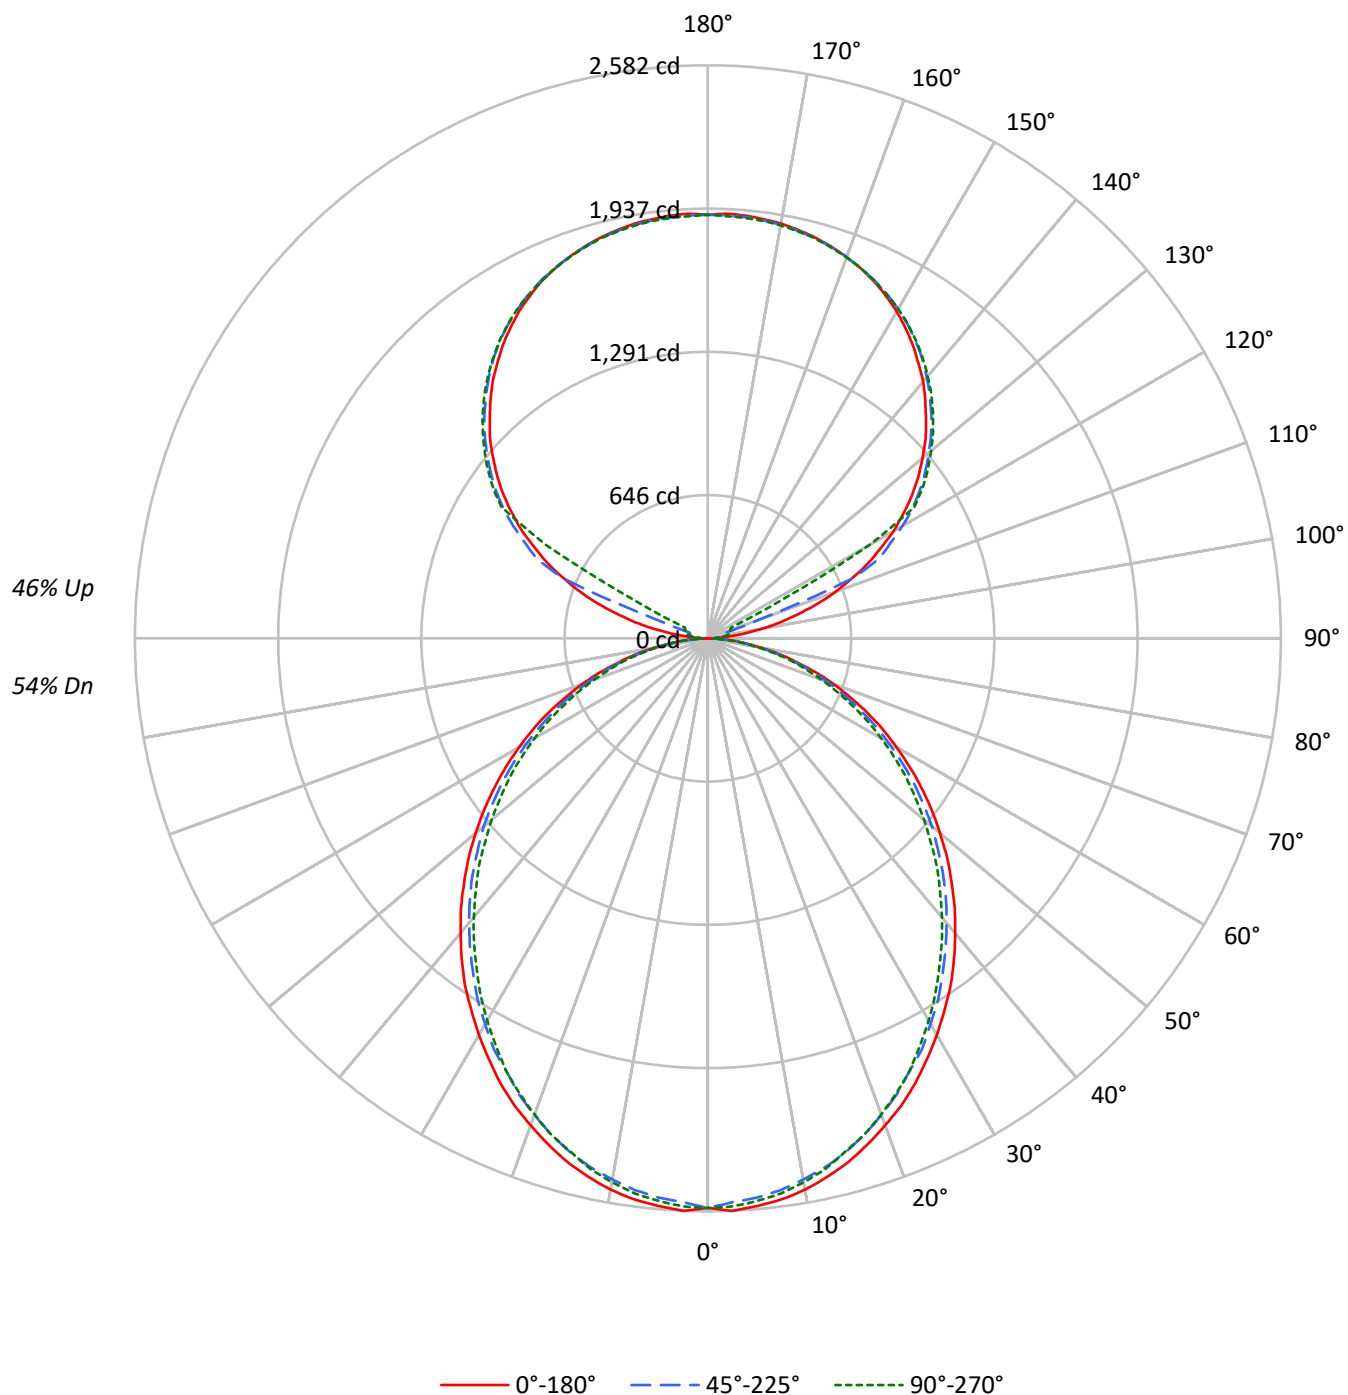

TEST NUMBER: P903729

CATALOG NUMBER: DFN2DIP-SQ3F0-070D060US830-FLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	60	60	60
1	99	94	90	87	91	88	84	81	75	73	70	63	62	60	53	52	50
2	90	82	76	71	83	77	71	67	66	62	58	56	53	50	46	44	42
3	82	72	65	59	76	67	61	56	58	53	49	49	46	42	41	38	36
4	75	64	56	50	69	60	53	47	52	46	42	44	40	36	37	34	31
5	69	57	49	43	64	53	46	41	46	40	36	39	35	32	33	30	27
6	63	51	43	37	59	48	41	35	42	36	31	36	31	28	30	27	24
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	28	34	29	25	30	25	22	25	22	19
9	51	38	31	26	47	36	29	25	32	26	22	27	23	20	23	20	17
10	47	35	28	23	44	33	27	22	29	24	20	25	21	18	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2942	2942	2942
5°	2944	2899	2919
10°	2919	2858	2879
15°	2874	2809	2816
20°	2814	2741	2752
25°	2754	2661	2678
30°	2680	2586	2584
35°	2610	2499	2485
40°	2523	2410	2390
45°	2437	2321	2293
50°	2342	2227	2181
55°	2243	2119	2078
60°	2131	1991	1960
65°	2008	1858	1820
70°	1852	1695	1670
75°	1636	1500	1530
80°	1375	1252	1265
85°	968	830	827

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2437 cd/sqm

TEST NUMBER: P903729

CATALOG NUMBER: DFN2DIP-SQ3F0-070D060US830-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	241.6	2.0
10°-20°	679.9	5.6
20°-30°	999.1	8.2
30°-40°	1160.4	9.6
40°-50°	1159.0	9.6
50°-60°	1010.6	8.3
60°-70°	747.1	6.2
70°-80°	422.7	3.5
80°-90°	114.9	0.9
90°-100°	62.9	0.5
100°-110°	234.6	1.9
110°-120°	622.2	5.1
120°-130°	1032.0	8.5
130°-140°	1096.2	9.0
140°-150°	1018.8	8.4
150°-160°	819.1	6.8
160°-170°	527.8	4.4
170°-180°	181.7	1.5
0°-30°	1920.6	15.8
0°-40°	3081.0	25.4
0°-60°	5250.6	43.3
0°-90°	6535.2	53.9
90°-120°	919.8	7.6
90°-150°	4066.8	33.5
90°-180°	5595.0	46.1
0°-180°	12130.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2567	2567	2567	2567	2567	
5°	2567	2558	2530	2550	2545	244
15°	2444	2429	2397	2407	2395	688
25°	2212	2192	2150	2155	2150	1018
35°	1908	1884	1844	1829	1817	1192
45°	1553	1536	1498	1471	1461	1198
55°	1175	1160	1131	1101	1089	1051
65°	793	778	753	731	718	784
75°	415	410	397	383	388	443
85°	101	99	96	89	86	113
90°	1	17	28	35	37	11
95°	90	44	54	61	59	106
105°	420	461	84	99	105	449
115°	794	818	852	213	113	782
125°	1123	1141	1167	1177	1181	1001
135°	1389	1412	1424	1438	1435	1073
145°	1612	1610	1634	1643	1636	1008
155°	1775	1762	1779	1787	1776	818
165°	1870	1862	1866	1876	1866	528
175°	1913	1903	1906	1915	1902	182
180°	1909	1909	1909	1909	1909	

TEST NUMBER: P903729

CATALOG NUMBER: DFN2DIP-SQ3F0-070D060US830-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2567.2	2567.2	2567.2	2567.2	2567.2
2.5°	2582.2	2569.8	2542.6	2567.2	2562.5
5°	2567.2	2557.6	2530.3	2550.0	2545.2
7.5°	2550.0	2535.3	2508.0	2528.0	2523.0
10°	2523.0	2505.7	2476.1	2495.8	2488.4
12.5°	2485.8	2471.2	2441.6	2453.8	2448.8
15°	2443.9	2429.2	2397.0	2407.0	2394.6
17.5°	2392.0	2377.4	2345.1	2357.5	2345.1
20°	2335.1	2320.5	2285.9	2293.3	2283.6
22.5°	2278.6	2256.4	2224.1	2224.1	2219.1
25°	2211.9	2192.2	2150.3	2155.0	2150.3
27.5°	2137.7	2120.4	2088.5	2081.1	2068.8
30°	2063.9	2043.9	2007.0	1999.7	1989.7
32.5°	1984.7	1970.1	1930.5	1915.6	1905.6
35°	1908.3	1883.7	1844.1	1829.2	1816.8
37.5°	1821.8	1799.6	1760.0	1742.8	1730.4
40°	1733.1	1713.2	1673.6	1651.6	1641.6
42.5°	1646.6	1626.7	1587.4	1562.5	1547.8
45°	1552.8	1535.6	1498.4	1471.4	1461.4
47.5°	1461.4	1444.2	1404.6	1377.3	1362.7
50°	1365.1	1352.7	1318.1	1283.6	1271.3
52.5°	1271.3	1254.1	1222.1	1194.9	1177.5
55°	1175.2	1160.3	1130.7	1101.1	1088.7
57.5°	1078.8	1066.5	1034.3	1004.7	994.8
60°	982.4	972.7	938.2	911.0	903.6
62.5°	888.6	871.4	846.8	822.2	812.2
65°	792.6	777.6	753.0	730.8	718.4
67.5°	693.8	681.3	659.2	642.0	632.0
70°	602.4	592.5	570.1	552.9	543.2
72.5°	508.6	498.7	486.4	469.1	461.8
75°	414.6	409.9	397.3	382.7	387.7
77.5°	330.8	320.8	315.8	308.5	301.2
80°	246.9	244.4	239.4	232.1	227.1
82.5°	167.9	167.9	165.5	155.6	155.6
85°	101.1	98.8	96.4	88.8	86.4
87.5°	44.5	39.6	34.6	27.2	24.6
90°	1.3	16.6	27.5	34.6	37.2
92.5°	34.6	29.0	33.1	35.9	37.2
95°	89.7	44.1	53.8	60.9	59.4
97.5°	161.6	48.4	70.3	74.6	76.0
100°	244.5	55.2	78.7	89.7	92.5
102.5°	335.5	332.9	81.5	96.6	100.9
105°	419.8	461.3	84.3	99.3	105.0
107.5°	517.9	552.3	87.1	102.2	107.7
110°	611.9	640.7	241.8	103.7	109.1



TEST NUMBER: P903729

CATALOG NUMBER: DFN2DIP-SQ3F0-070D060US830-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	700.2	725.0	701.5	106.2	110.6
115°	794.1	817.6	852.2	212.7	113.3
117.5°	875.5	903.1	926.7	729.2	367.3
120°	966.8	987.4	1012.4	1028.9	842.4
122.5°	1044.0	1066.1	1093.8	1102.0	1103.5
125°	1122.8	1140.8	1167.0	1176.7	1180.7
127.5°	1194.6	1213.9	1234.7	1248.5	1249.8
130°	1262.3	1284.4	1299.5	1314.8	1313.4
132.5°	1331.3	1349.3	1364.4	1376.9	1375.5
135°	1389.4	1411.6	1423.8	1437.8	1434.9
137.5°	1450.0	1466.6	1480.5	1494.3	1490.3
140°	1509.4	1520.6	1535.7	1548.1	1541.2
142.5°	1559.2	1569.0	1586.9	1597.8	1590.9
145°	1611.7	1610.2	1633.7	1643.4	1636.5
147.5°	1657.2	1653.0	1676.5	1683.4	1678.0
150°	1701.5	1691.8	1713.9	1722.1	1715.2
152.5°	1738.7	1727.7	1748.3	1756.7	1747.0
155°	1774.6	1762.3	1778.9	1787.1	1776.0
157.5°	1803.6	1792.6	1805.1	1814.8	1803.6
160°	1828.5	1820.1	1828.5	1836.7	1827.1
162.5°	1850.5	1842.3	1849.2	1858.9	1846.4
165°	1869.9	1861.7	1865.8	1875.5	1865.8
167.5°	1885.1	1876.8	1881.0	1890.7	1878.2
170°	1897.6	1889.2	1892.1	1901.7	1889.2
172.5°	1905.8	1897.6	1900.4	1910.1	1897.6
175°	1912.7	1903.0	1905.8	1915.4	1901.7
177.5°	1915.4	1905.8	1907.2	1916.9	1904.5
180°	1908.6	1908.6	1908.6	1908.6	1908.6

TEST NUMBER: P903729

CATALOG NUMBER: DFN2DIP-SQ3F0-070D060US830-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.34	12.23	12.26	13.18	14.39	10.89	11.79	11.82	12.73	13.95
	3H	13.00	13.80	13.93	14.75	15.99	12.51	13.31	13.44	14.26	15.50
	4H	13.58	14.34	14.53	15.30	16.55	13.09	13.85	14.04	14.81	16.05
	6H	13.98	14.68	14.94	15.64	16.90	13.48	14.18	14.44	15.14	16.40
	8H	14.08	14.75	15.05	15.73	16.99	13.58	14.25	14.55	15.23	16.49
	12H	14.13	14.77	15.11	15.74	17.02	13.62	14.26	14.60	15.23	16.51
4H	2H	11.80	12.56	12.75	13.52	14.76	11.44	12.21	12.40	13.16	14.41
	3H	13.66	14.30	14.63	15.28	16.55	13.26	13.89	14.22	14.88	16.14
	4H	14.37	14.96	15.35	15.93	17.22	13.95	14.53	14.93	15.51	16.80
	6H	14.89	15.39	15.87	16.39	17.68	14.46	14.96	15.44	15.96	17.24
	8H	15.04	15.50	16.02	16.50	17.80	14.60	15.07	15.59	16.06	17.36
	12H	15.11	15.53	16.12	16.54	17.85	14.66	15.08	15.67	16.09	17.40
8H	4H	14.57	15.04	15.56	16.03	17.33	14.19	14.66	15.18	15.66	16.96
	6H	15.20	15.58	16.21	16.62	17.92	14.81	15.20	15.83	16.24	17.53
	8H	15.41	15.76	16.44	16.78	18.10	15.02	15.36	16.04	16.39	17.70
	12H	15.54	15.84	16.57	16.86	18.22	15.13	15.43	16.16	16.45	17.81
12H	4H	14.56	14.98	15.56	15.99	17.30	14.19	14.61	15.20	15.62	16.93
	6H	15.23	15.57	16.25	16.59	17.91	14.85	15.19	15.87	16.22	17.53
	8H	15.46	15.77	16.49	16.78	18.14	15.08	15.38	16.11	16.40	17.76

END OF REPORT