

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903769

Luminaire Tested: DFN2DIP-SQ3F0-080D070US830-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903769
REPORT IS A COMBINATION OF REPORTS P901443 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-080D070US830-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13996.7 lumens
Efficiency: N/A
Efficacy: 108.8 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 128.7
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9952
Total Harmonic Distortion (THDi): 0.069
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903769

CATALOG NUMBER: DFN2DIP-SQ3F0-080D070US830-FLLONL

Luminous Intensity Polar Plot

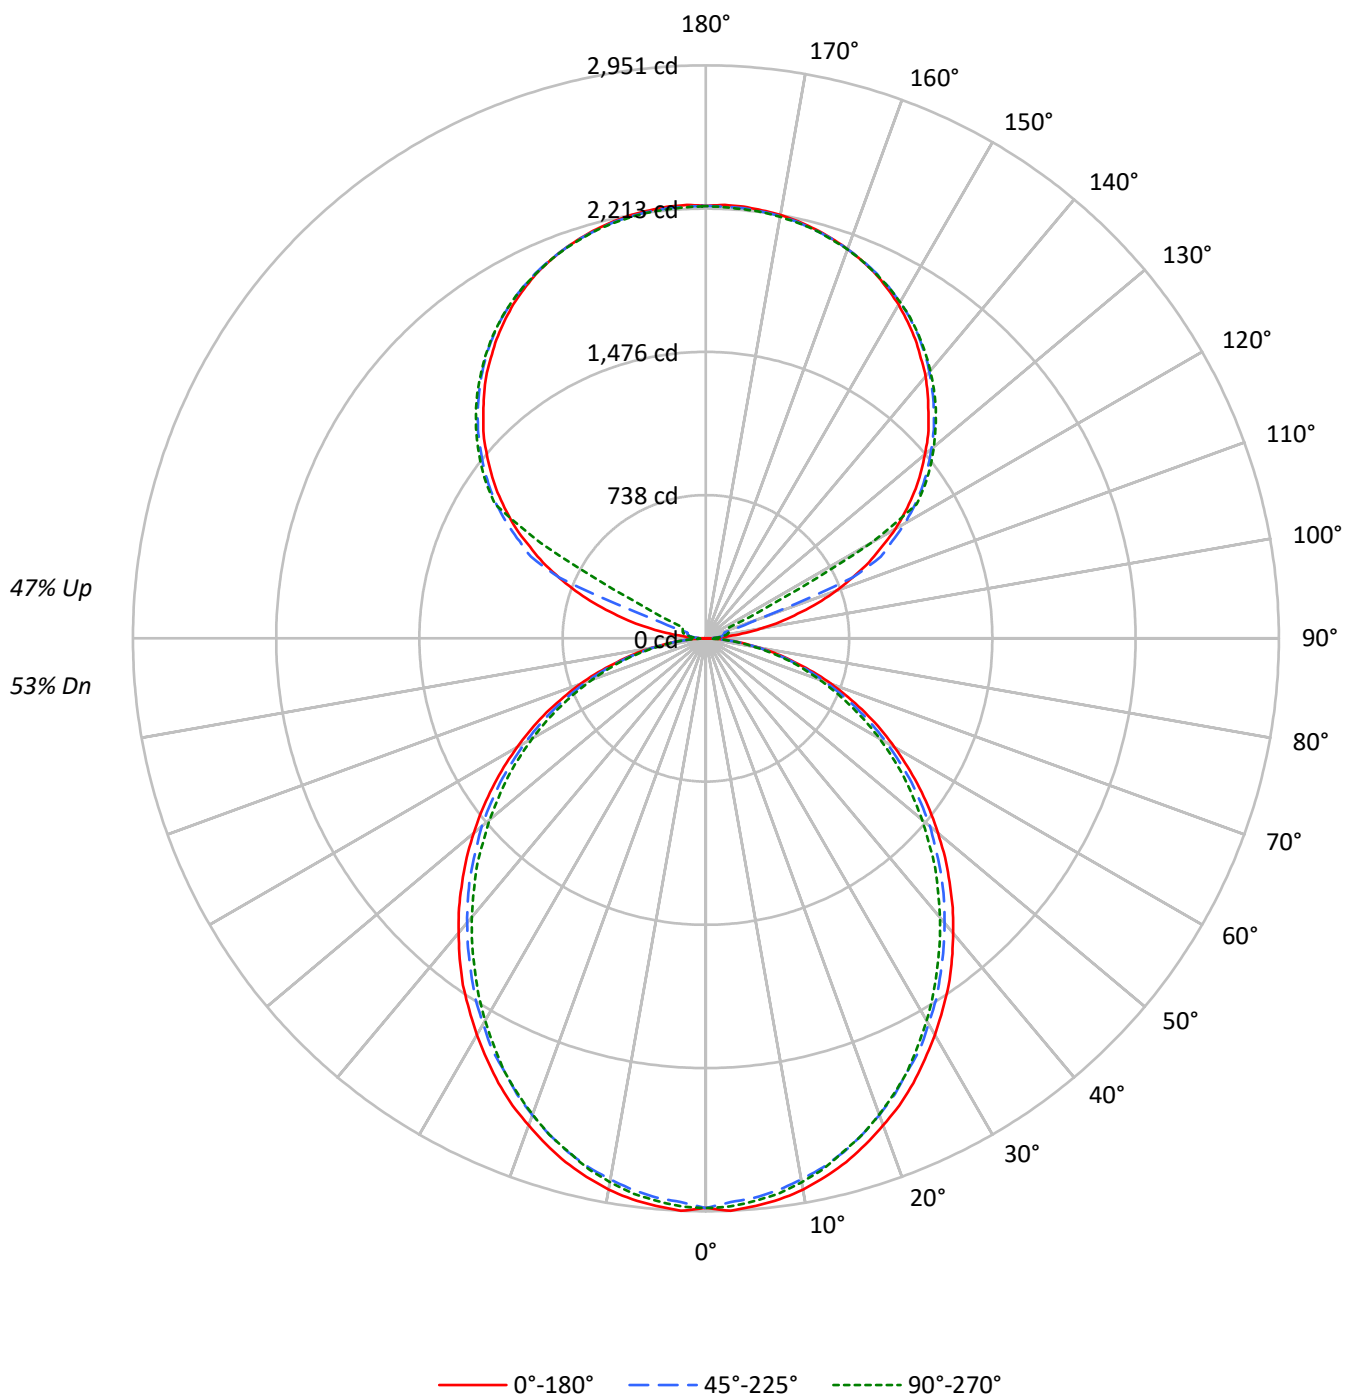

TEST NUMBER: P903769

CATALOG NUMBER: DFN2DIP-SQ3F0-080D070US830-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	108	108	108	108	100	100	100	100	85	85	85	72	72	72	59	59	59
1	99	94	90	87	91	87	84	81	75	72	70	63	61	60	52	51	50
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42
3	82	72	65	59	76	67	61	56	58	53	49	49	45	42	41	38	36
4	75	64	56	50	69	60	53	47	51	46	42	44	40	36	37	33	31
5	69	57	49	43	63	53	46	41	46	40	36	39	35	31	33	30	27
6	63	51	43	37	59	48	41	35	41	36	31	35	31	28	30	26	24
7	59	46	38	33	54	43	36	31	38	32	28	32	28	24	27	24	21
8	54	42	34	29	50	39	32	27	34	29	25	30	25	22	25	22	19
9	51	38	31	26	47	36	29	25	31	26	22	27	23	20	23	20	17
10	47	35	28	23	44	33	26	22	29	24	20	25	21	18	21	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	3362	3362	3362
5°	3365	3313	3336
10°	3336	3266	3290
15°	3284	3210	3218
20°	3216	3133	3145
25°	3148	3041	3060
30°	3063	2956	2953
35°	2982	2856	2840
40°	2884	2754	2731
45°	2785	2652	2621
50°	2677	2545	2493
55°	2563	2422	2375
60°	2435	2275	2240
65°	2295	2123	2080
70°	2116	1938	1909
75°	1870	1715	1748
80°	1572	1431	1445
85°	1107	949	946

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 2785 cd/sqm

TEST NUMBER: P903769

CATALOG NUMBER: DFN2DIP-SQ3F0-080D070US830-FLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	276.1	2.0
10°-20°	777.0	5.6
20°-30°	1141.8	8.2
30°-40°	1326.2	9.5
40°-50°	1324.5	9.5
50°-60°	1155.0	8.3
60°-70°	853.8	6.1
70°-80°	483.0	3.5
80°-90°	131.4	0.9
90°-100°	73.4	0.5
100°-110°	273.7	2.0
110°-120°	725.9	5.2
120°-130°	1204.0	8.6
130°-140°	1278.9	9.1
140°-150°	1188.6	8.5
150°-160°	955.6	6.8
160°-170°	615.8	4.4
170°-180°	211.9	1.5
0°-30°	2195.0	15.7
0°-40°	3521.1	25.2
0°-60°	6000.6	42.9
0°-90°	7468.8	53.4
90°-120°	1073.0	7.7
90°-150°	4744.6	33.9
90°-180°	6528.0	46.6
0°-180°	13996.7	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2934	2934	2934	2934	2934	
5°	2934	2923	2892	2914	2909	279
15°	2793	2776	2739	2751	2737	787
25°	2528	2505	2458	2463	2458	1163
35°	2181	2153	2108	2090	2076	1362
45°	1775	1755	1712	1682	1670	1370
55°	1343	1326	1292	1258	1244	1201
65°	906	889	860	835	821	896
75°	474	468	454	437	443	506
85°	116	113	110	102	99	129
90°	2	19	32	40	44	13
95°	105	52	63	71	69	124
105°	490	538	98	116	122	523
115°	926	954	994	248	132	912
125°	1310	1331	1362	1373	1378	1168
135°	1621	1647	1661	1677	1674	1252
145°	1880	1879	1906	1917	1909	1176
155°	2070	2056	2075	2085	2072	954
165°	2182	2172	2177	2188	2177	616
175°	2232	2220	2224	2235	2219	212
180°	2227	2227	2227	2227	2227	

TEST NUMBER: P903769

CATALOG NUMBER: DFN2DIP-SQ3F0-080D070US830-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2933.9	2933.9	2933.9	2933.9	2933.9
2.5°	2951.0	2937.0	2905.9	2933.9	2928.6
5°	2933.9	2922.9	2891.8	2914.2	2908.9
7.5°	2914.2	2897.5	2866.4	2889.1	2883.4
10°	2883.4	2863.6	2829.8	2852.2	2843.9
12.5°	2840.9	2824.1	2790.3	2804.3	2798.7
15°	2793.0	2776.3	2739.4	2750.8	2736.8
17.5°	2733.7	2717.0	2680.1	2694.3	2680.1
20°	2668.8	2652.0	2612.5	2620.9	2609.8
22.5°	2604.2	2578.7	2541.8	2541.8	2536.2
25°	2527.8	2505.4	2457.5	2462.9	2457.5
27.5°	2443.1	2423.4	2386.8	2378.4	2364.4
30°	2358.7	2335.9	2293.8	2285.4	2274.0
32.5°	2268.3	2251.5	2206.3	2189.2	2177.9
35°	2180.9	2152.8	2107.5	2090.5	2076.4
37.5°	2082.1	2056.6	2011.5	1991.7	1977.6
40°	1980.7	1957.8	1912.7	1887.5	1876.1
42.5°	1881.9	1859.1	1814.2	1785.7	1769.1
45°	1774.7	1754.9	1712.4	1681.6	1670.3
47.5°	1670.3	1650.5	1605.2	1574.1	1557.4
50°	1560.1	1546.1	1506.5	1467.0	1452.9
52.5°	1452.9	1433.1	1396.7	1365.6	1345.8
55°	1343.0	1326.0	1292.2	1258.4	1244.3
57.5°	1232.9	1218.9	1182.0	1148.2	1136.8
60°	1122.8	1111.7	1072.1	1041.0	1032.6
62.5°	1015.6	995.9	967.7	939.6	928.2
65°	905.8	888.7	860.5	835.1	821.0
67.5°	792.9	778.5	753.4	733.7	722.3
70°	688.4	677.0	651.7	631.9	620.8
72.5°	581.3	570.0	555.8	536.1	527.7
75°	473.8	468.4	454.1	437.3	443.0
77.5°	378.1	366.6	361.0	352.6	344.2
80°	282.3	279.3	273.6	265.2	259.5
82.5°	191.9	191.9	189.2	177.8	177.8
85°	115.6	112.8	110.2	101.5	98.8
87.5°	50.9	45.2	39.5	31.1	28.2
90°	1.5	19.3	32.1	40.3	43.5
92.5°	40.3	33.8	38.6	41.9	43.5
95°	104.6	51.5	62.8	71.0	69.3
97.5°	188.4	56.5	82.1	87.1	88.6
100°	285.3	64.5	91.8	104.6	107.9
102.5°	391.4	388.4	95.1	112.7	117.6
105°	489.8	538.2	98.3	115.9	122.4
107.5°	604.2	644.4	101.6	119.2	125.7
110°	713.9	747.5	282.0	120.9	127.2



TEST NUMBER: P903769

CATALOG NUMBER: DFN2DIP-SQ3F0-080D070US830-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	817.0	845.8	818.5	123.9	128.9
115°	926.4	953.8	994.1	248.2	132.2
117.5°	1021.5	1053.7	1081.2	850.6	428.6
120°	1127.8	1152.0	1181.1	1200.4	982.9
122.5°	1218.0	1243.8	1276.2	1285.7	1287.4
125°	1309.9	1330.9	1361.5	1372.8	1377.5
127.5°	1393.6	1416.2	1440.5	1456.6	1458.1
130°	1472.6	1498.5	1516.1	1533.9	1532.4
132.5°	1553.2	1574.2	1591.9	1606.4	1604.9
135°	1620.9	1646.7	1661.1	1677.3	1674.1
137.5°	1691.7	1711.1	1727.3	1743.4	1738.6
140°	1761.0	1774.0	1791.6	1806.1	1798.1
142.5°	1819.1	1830.4	1851.2	1864.1	1856.1
145°	1880.4	1878.7	1906.0	1917.3	1909.3
147.5°	1933.3	1928.6	1956.0	1964.0	1957.7
150°	1985.0	1973.8	1999.6	2009.1	2001.1
152.5°	2028.4	2015.6	2039.8	2049.5	2038.2
155°	2070.4	2056.0	2075.3	2084.9	2072.1
157.5°	2104.2	2091.4	2105.9	2117.2	2104.2
160°	2133.4	2123.5	2133.4	2142.9	2131.6
162.5°	2159.0	2149.4	2157.4	2168.7	2154.2
165°	2181.5	2172.0	2176.7	2188.0	2176.7
167.5°	2199.3	2189.5	2194.5	2205.8	2191.3
170°	2213.8	2204.1	2207.3	2218.7	2204.1
172.5°	2223.5	2213.8	2217.1	2228.4	2213.8
175°	2231.5	2220.2	2223.5	2234.7	2218.7
177.5°	2234.7	2223.5	2225.2	2236.5	2221.9
180°	2226.7	2226.7	2226.7	2226.7	2226.7

TEST NUMBER: P903769

CATALOG NUMBER: DFN2DIP-SQ3F0-080D070US830-FLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.76	12.65	12.68	13.59	14.82	11.31	12.20	12.24	13.15	14.37
	3H	13.41	14.21	14.35	15.17	16.42	12.92	13.72	13.86	14.68	15.93
	4H	14.00	14.76	14.95	15.72	16.97	13.51	14.26	14.46	15.22	16.48
	6H	14.40	15.10	15.36	16.06	17.33	13.90	14.60	14.86	15.56	16.83
	8H	14.50	15.17	15.47	16.15	17.41	14.00	14.66	14.97	15.65	16.91
	12H	14.55	15.18	15.53	16.16	17.45	14.04	14.67	15.02	15.65	16.94
4H	2H	12.22	12.97	13.18	13.93	15.19	11.86	12.62	12.82	13.58	14.83
	3H	14.08	14.71	15.05	15.70	16.97	13.67	14.30	14.64	15.29	16.56
	4H	14.79	15.37	15.77	16.35	17.65	14.37	14.95	15.35	15.93	17.22
	6H	15.30	15.80	16.29	16.81	18.10	14.87	15.37	15.86	16.38	17.67
	8H	15.45	15.92	16.44	16.92	18.22	15.02	15.48	16.01	16.48	17.79
	12H	15.53	15.95	16.54	16.96	18.27	15.08	15.50	16.09	16.51	17.82
8H	4H	14.99	15.45	15.98	16.45	17.76	14.61	15.07	15.60	16.07	17.38
	6H	15.61	16.00	16.63	17.04	18.34	15.23	15.61	16.25	16.66	17.96
	8H	15.83	16.17	16.86	17.20	18.52	15.44	15.78	16.46	16.81	18.13
	12H	15.96	16.26	16.99	17.28	18.65	15.55	15.85	16.58	16.87	18.24
12H	4H	14.97	15.39	15.98	16.41	17.72	14.60	15.02	15.62	16.04	17.35
	6H	15.64	15.98	16.67	17.01	18.33	15.27	15.61	16.29	16.64	17.96
	8H	15.88	16.18	16.91	17.20	18.57	15.50	15.80	16.53	16.82	18.19