

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903776

Luminaire Tested: DFN2DIP-SQ3F0-080D090US830-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P903776  
REPORT IS A COMBINATION OF REPORTS P899959 AND P896733  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-080D090US830-FLLFLL  
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 14972.3 lumens  
Efficiency: N/A  
Efficacy: 103.5 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 144.7  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9952  
Total Harmonic Distortion (THDi): 0.069  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P903776  
CATALOG NUMBER: DFN2DIP-SQ3F0-080D090US830-FLLFLL

### Luminous Intensity Polar Plot

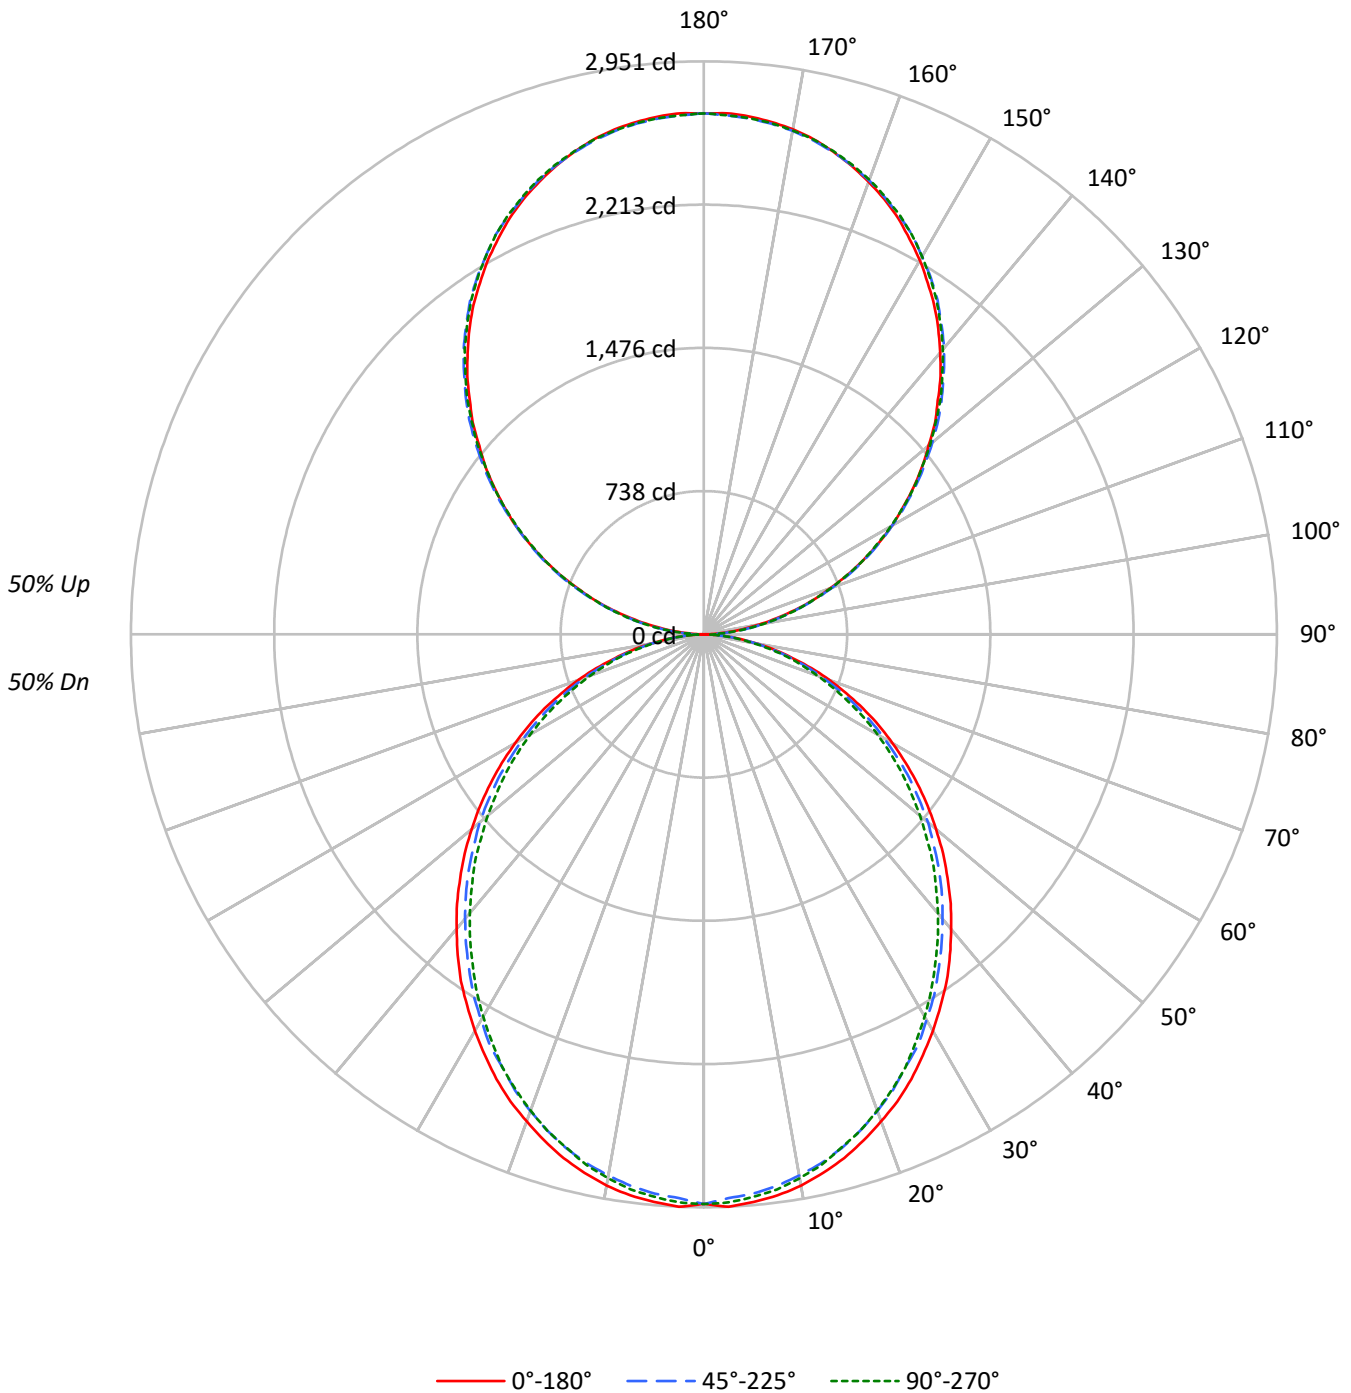



TEST NUMBER: P903776

CATALOG NUMBER: DFN2DIP-SQ3F0-080D090US830-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	107	107	107	107	99	99	99	99	83	83	83	69	69	69	56	56	56	56	56	56	50
1	98	93	90	86	90	86	83	80	73	71	68	61	59	58	50	48	47	50	48	47	42
2	89	82	75	70	82	75	70	66	64	60	57	53	51	48	44	42	40	44	42	40	35
3	81	72	64	59	75	66	60	55	56	52	48	47	44	41	39	36	34	39	36	34	30
4	74	63	56	50	68	59	52	46	50	45	41	42	38	35	35	32	29	35	32	29	26
5	68	57	48	42	63	53	45	40	45	39	35	38	34	30	31	28	25	31	28	25	22
6	63	51	43	37	58	47	40	35	40	35	31	34	30	26	28	25	22	28	25	22	20
7	58	46	38	32	53	43	36	30	37	31	27	31	27	23	26	22	20	26	22	20	17
8	54	42	34	29	50	39	32	27	33	28	24	28	24	21	24	20	18	24	20	18	16
9	50	38	30	25	46	35	29	24	31	25	21	26	22	19	22	19	16	22	19	16	14
10	47	35	28	23	43	33	26	22	28	23	19	24	20	17	20	17	15	20	17	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3362	3362	3362
5°	3365	3313	3336
10°	3336	3266	3290
15°	3284	3210	3218
20°	3216	3133	3145
25°	3148	3041	3060
30°	3063	2956	2953
35°	2982	2856	2840
40°	2884	2754	2731
45°	2785	2652	2621
50°	2677	2545	2493
55°	2563	2422	2375
60°	2435	2275	2240
65°	2295	2123	2080
70°	2116	1938	1909
75°	1870	1715	1748
80°	1572	1431	1445
85°	1107	949	946

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2785 cd/sqm



TEST NUMBER: P903776

CATALOG NUMBER: DFN2DIP-SQ3F0-080D090US830-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	276.1	1.8
10°-20°	777.0	5.2
20°-30°	1141.8	7.6
30°-40°	1326.2	8.9
40°-50°	1324.5	8.8
50°-60°	1155.0	7.7
60°-70°	853.8	5.7
70°-80°	483.0	3.2
80°-90°	135.1	0.9
90°-100°	166.0	1.1
100°-110°	527.5	3.5
110°-120°	902.7	6.0
120°-130°	1187.2	7.9
130°-140°	1332.5	8.9
140°-150°	1306.7	8.7
150°-160°	1096.1	7.3
160°-170°	726.9	4.9
170°-180°	254.1	1.7
0°-30°	2195.0	14.7
0°-40°	3521.1	23.5
0°-60°	6000.6	40.1
0°-90°	7472.6	49.9
90°-120°	1596.2	10.7
90°-150°	5422.6	36.2
90°-180°	7500.0	50.1
0°-180°	14972.3	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2934	2934	2934	2934	2934	
5°	2934	2923	2892	2914	2909	279
15°	2793	2776	2739	2751	2737	787
25°	2528	2505	2458	2463	2458	1163
35°	2181	2153	2108	2090	2076	1362
45°	1775	1755	1712	1682	1670	1370
55°	1343	1326	1292	1258	1244	1201
65°	906	889	860	835	821	896
75°	474	468	454	437	443	506
85°	116	113	110	102	99	129
90°	2	29	79	74	77	15
95°	118	141	145	145	141	131
105°	487	493	498	502	502	514
115°	906	919	915	912	906	896
125°	1318	1338	1331	1324	1322	1177
135°	1704	1729	1734	1732	1725	1317
145°	2069	2085	2098	2100	2092	1293
155°	2366	2372	2380	2391	2384	1089
165°	2574	2571	2571	2587	2576	726
175°	2678	2671	2667	2683	2669	254
180°	2683	2683	2683	2683	2683	



TEST NUMBER: P903776

CATALOG NUMBER: DFN2DIP-SQ3F0-080D090US830-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2933.9	2933.9	2933.9	2933.9	2933.9
2.5°	2951.0	2937.0	2905.9	2933.9	2928.6
5°	2933.9	2922.9	2891.8	2914.2	2908.9
7.5°	2914.2	2897.5	2866.4	2889.1	2883.4
10°	2883.4	2863.6	2829.8	2852.2	2843.9
12.5°	2840.9	2824.1	2790.3	2804.3	2798.7
15°	2793.0	2776.3	2739.4	2750.8	2736.8
17.5°	2733.7	2717.0	2680.1	2694.3	2680.1
20°	2668.8	2652.0	2612.5	2620.9	2609.8
22.5°	2604.2	2578.7	2541.8	2541.8	2536.2
25°	2527.8	2505.4	2457.5	2462.9	2457.5
27.5°	2443.1	2423.4	2386.8	2378.4	2364.4
30°	2358.7	2335.9	2293.8	2285.4	2274.0
32.5°	2268.3	2251.5	2206.3	2189.2	2177.9
35°	2180.9	2152.8	2107.5	2090.5	2076.4
37.5°	2082.1	2056.6	2011.5	1991.7	1977.6
40°	1980.7	1957.8	1912.7	1887.5	1876.1
42.5°	1881.9	1859.1	1814.2	1785.7	1769.1
45°	1774.7	1754.9	1712.4	1681.6	1670.3
47.5°	1670.3	1650.5	1605.2	1574.1	1557.4
50°	1560.1	1546.1	1506.5	1467.0	1452.9
52.5°	1452.9	1433.1	1396.7	1365.6	1345.8
55°	1343.0	1326.0	1292.2	1258.4	1244.3
57.5°	1232.9	1218.9	1182.0	1148.2	1136.8
60°	1122.8	1111.7	1072.1	1041.0	1032.6
62.5°	1015.6	995.9	967.7	939.6	928.2
65°	905.8	888.7	860.5	835.1	821.0
67.5°	792.9	778.5	753.4	733.7	722.3
70°	688.4	677.0	651.7	631.9	620.8
72.5°	581.3	570.0	555.8	536.1	527.7
75°	473.8	468.4	454.1	437.3	443.0
77.5°	378.1	366.6	361.0	352.6	344.2
80°	282.3	279.3	273.6	265.2	259.5
82.5°	191.9	191.9	189.2	177.8	177.8
85°	115.6	112.8	110.2	101.5	98.8
87.5°	50.9	45.2	39.5	31.1	28.2
90°	2.5	29.1	79.3	74.4	76.8
92.5°	50.1	68.0	70.4	72.8	72.8
95°	118.1	140.7	144.8	144.8	140.7
97.5°	196.5	217.5	226.5	226.5	226.5
100°	287.1	305.8	312.2	312.2	309.8
102.5°	382.6	396.3	405.2	407.6	405.2
105°	486.9	493.3	498.2	502.3	502.3
107.5°	590.4	600.1	600.1	601.7	590.4
110°	690.7	703.7	703.7	703.7	697.2



TEST NUMBER: P903776

CATALOG NUMBER: DFN2DIP-SQ3F0-080D090US830-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	799.1	812.8	810.4	804.0	799.1
115°	905.9	918.8	914.7	912.4	905.9
117.5°	1011.8	1029.6	1018.3	1011.8	1005.3
120°	1118.6	1136.3	1118.6	1118.6	1111.3
122.5°	1215.6	1238.3	1227.0	1220.5	1215.6
125°	1317.6	1337.8	1331.3	1324.0	1321.6
127.5°	1417.0	1442.1	1433.2	1423.5	1417.0
130°	1510.0	1539.2	1535.1	1530.2	1521.4
132.5°	1614.4	1637.0	1638.6	1627.3	1620.9
135°	1704.1	1729.2	1734.1	1731.6	1725.2
137.5°	1804.4	1824.7	1828.7	1827.1	1817.4
140°	1892.6	1912.8	1924.1	1924.1	1915.2
142.5°	1983.2	2003.4	2009.9	2012.3	2003.4
145°	2069.0	2085.1	2098.0	2100.5	2091.6
147.5°	2145.8	2166.0	2175.7	2179.7	2170.9
150°	2225.1	2238.8	2247.7	2254.9	2247.7
152.5°	2295.4	2309.1	2320.4	2329.4	2320.4
155°	2365.8	2372.2	2379.5	2390.9	2383.6
157.5°	2426.4	2431.3	2435.3	2451.5	2440.1
160°	2480.6	2485.5	2487.9	2501.6	2491.9
162.5°	2530.7	2530.7	2533.2	2548.5	2537.2
165°	2573.6	2571.2	2571.2	2587.4	2576.1
167.5°	2612.4	2605.2	2605.2	2621.3	2610.0
170°	2641.6	2635.1	2632.7	2648.8	2635.1
172.5°	2661.7	2655.3	2652.9	2669.1	2655.3
175°	2678.0	2671.4	2666.6	2682.9	2669.1
177.5°	2686.8	2680.4	2675.5	2689.3	2675.5
180°	2682.9	2682.9	2682.9	2682.9	2682.9



TEST NUMBER: P903776  
 CATALOG NUMBER: DFN2DIP-SQ3F0-080D090US830-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.44	12.30	12.40	13.27	14.55	11.00	11.86	11.95	12.83	14.10
	3H	13.10	13.87	14.07	14.85	16.15	12.61	13.38	13.58	14.36	15.66
	4H	13.68	14.41	14.66	15.40	16.70	13.19	13.92	14.17	14.90	16.21
	6H	14.08	14.75	15.07	15.74	17.06	13.58	14.25	14.57	15.24	16.56
	8H	14.18	14.82	15.18	15.83	17.14	13.68	14.32	14.68	15.33	16.64
	12H	14.23	14.84	15.23	15.84	17.18	13.72	14.33	14.72	15.33	16.67
4H	2H	11.90	12.63	12.89	13.61	14.92	11.54	12.27	12.53	13.26	14.56
	3H	13.76	14.37	14.76	15.38	16.70	13.35	13.96	14.35	14.98	16.29
	4H	14.47	15.03	15.47	16.03	17.37	14.04	14.60	15.05	15.61	16.95
	6H	14.98	15.46	16.00	16.49	17.83	14.55	15.03	15.56	16.06	17.40
	8H	15.13	15.58	16.15	16.60	17.95	14.69	15.14	15.71	16.16	17.52
	12H	15.20	15.60	16.23	16.64	18.00	14.75	15.15	15.79	16.19	17.55
8H	4H	14.66	15.11	15.68	16.13	17.49	14.28	14.73	15.30	15.76	17.11
	6H	15.29	15.66	16.33	16.72	18.07	14.90	15.27	15.95	16.34	17.69
	8H	15.50	15.83	16.55	16.88	18.25	15.11	15.44	16.16	16.49	17.86
	12H	15.63	15.92	16.69	16.97	18.38	15.22	15.51	16.28	16.56	17.97
12H	4H	14.65	15.05	15.68	16.09	17.45	14.28	14.68	15.31	15.72	17.08
	6H	15.31	15.64	16.36	16.69	18.06	14.94	15.27	15.99	16.32	17.69
	8H	15.55	15.84	16.61	16.89	18.30	15.17	15.46	16.23	16.51	17.92