

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P903880

Luminaire Tested: DFN2DIP-SQ3F0-110D080US830-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P903880
REPORT IS A COMBINATION OF REPORTS P899947 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-110D080US830-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 16937.5 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 172.3
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9977
Total Harmonic Distortion (THDi): 0.049
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P903880

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US830-FLLFLL

Luminous Intensity Polar Plot

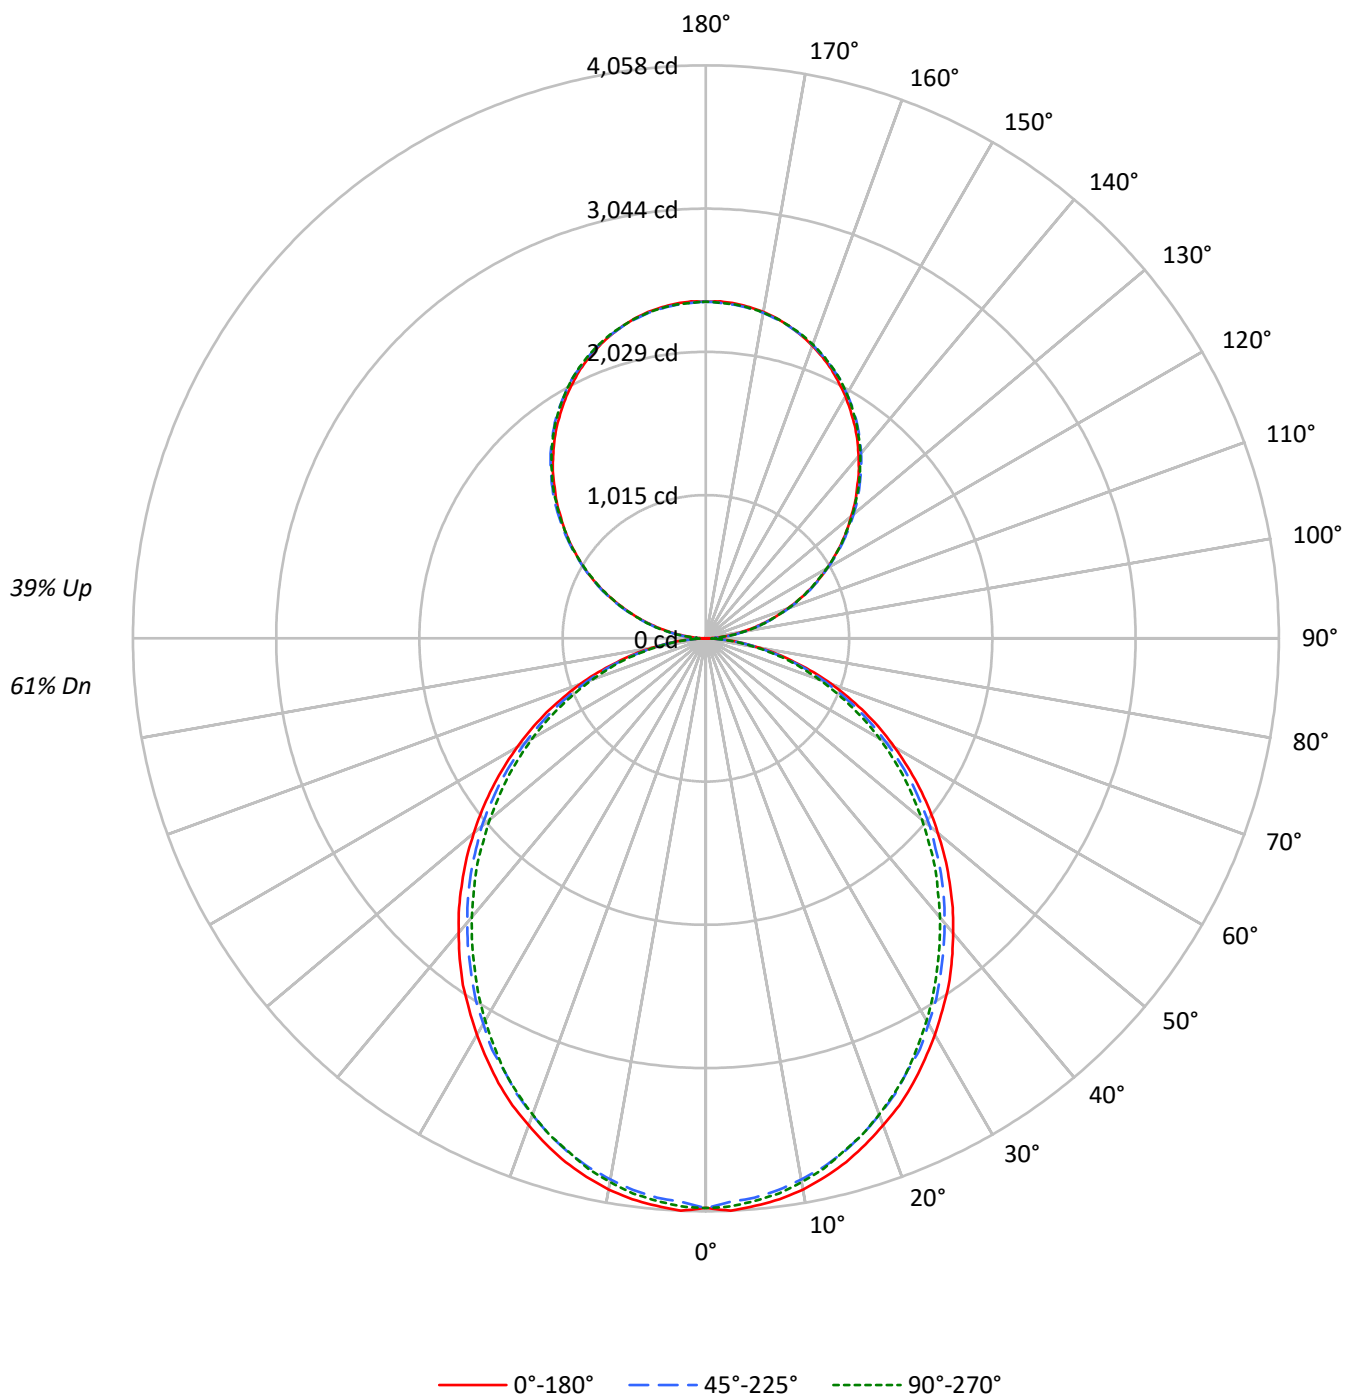

TEST NUMBER: P903880

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US830-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	110	110	110	110	103	103	103	103	89	89	89	77	77	77	66	66	66
1	100	96	92	88	94	90	86	83	78	76	73	68	66	64	58	57	56
2	91	84	77	72	85	78	73	68	69	64	61	60	56	54	51	49	47
3	83	74	66	60	78	69	62	57	61	55	51	53	49	45	45	42	40
4	76	65	57	51	71	61	54	48	54	48	44	47	43	39	41	37	34
5	70	58	50	44	65	55	47	42	48	42	38	42	38	34	37	33	30
6	65	52	44	38	60	49	42	36	44	38	33	38	33	30	33	29	26
7	60	47	39	33	56	45	37	32	40	34	29	35	30	26	30	27	24
8	55	43	35	30	52	41	33	28	36	30	26	32	27	24	28	24	21
9	52	39	32	27	48	37	30	25	33	27	23	29	25	21	26	22	19
10	48	36	29	24	45	34	27	23	31	25	21	27	23	19	24	20	17

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4623	4623	4623
5°	4627	4555	4587
10°	4586	4491	4524
15°	4516	4414	4425
20°	4422	4308	4324
25°	4328	4182	4208
30°	4212	4064	4060
35°	4101	3926	3904
40°	3965	3787	3756
45°	3829	3647	3604
50°	3681	3500	3428
55°	3525	3330	3266
60°	3349	3128	3080
65°	3156	2919	2861
70°	2910	2664	2624
75°	2571	2358	2404
80°	2161	1967	1987
85°	1522	1304	1300

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3829 cd/sqm

TEST NUMBER: P903880

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US830-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	379.7	2.2
10°-20°	1068.3	6.3
20°-30°	1570.0	9.3
30°-40°	1823.5	10.8
40°-50°	1821.2	10.8
50°-60°	1588.0	9.4
60°-70°	1173.9	6.9
70°-80°	664.2	3.9
80°-90°	182.1	1.1
90°-100°	147.6	0.9
100°-110°	468.9	2.8
110°-120°	802.4	4.7
120°-130°	1055.3	6.2
130°-140°	1184.5	7.0
140°-150°	1161.5	6.9
150°-160°	974.4	5.8
160°-170°	646.2	3.8
170°-180°	225.9	1.3
0°-30°	3018.1	17.8
0°-40°	4841.6	28.6
0°-60°	8250.9	48.7
0°-90°	10271.0	60.6
90°-120°	1418.8	8.4
90°-150°	4820.1	28.5
90°-180°	6666.0	39.4
0°-180°	16937.5	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	4034	4034	4034	4034	4034	
5°	4034	4019	3976	4007	4000	383
15°	3840	3817	3767	3782	3763	1082
25°	3476	3445	3379	3386	3379	1599
35°	2999	2960	2898	2874	2855	1873
45°	2440	2413	2355	2312	2297	1883
55°	1847	1823	1777	1730	1711	1651
65°	1245	1222	1183	1148	1129	1231
75°	652	644	624	601	609	696
85°	159	155	152	140	136	177
90°	2	26	70	66	68	16
95°	105	125	129	129	125	117
105°	433	439	443	446	446	457
115°	805	817	813	811	805	796
125°	1171	1189	1183	1177	1175	1047
135°	1515	1537	1541	1539	1534	1171
145°	1839	1853	1865	1867	1859	1149
155°	2103	2109	2115	2125	2119	968
165°	2288	2286	2286	2300	2290	645
175°	2380	2375	2370	2385	2372	226
180°	2385	2385	2385	2385	2385	

TEST NUMBER: P903880

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US830-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	4034.3	4034.3	4034.3	4034.3	4034.3
2.5°	4057.6	4038.3	3995.5	4034.3	4026.8
5°	4034.3	4019.0	3976.2	4007.0	3999.7
7.5°	4007.0	3984.0	3941.2	3972.5	3964.7
10°	3964.7	3937.5	3891.0	3921.8	3910.3
12.5°	3906.3	3883.2	3836.7	3856.0	3848.2
15°	3840.4	3817.3	3766.7	3782.3	3763.0
17.5°	3758.9	3735.9	3685.2	3704.6	3685.2
20°	3669.6	3646.5	3592.2	3603.7	3588.5
22.5°	3580.7	3545.7	3495.0	3495.0	3487.2
25°	3475.7	3444.9	3379.0	3386.5	3379.0
27.5°	3359.2	3332.1	3281.8	3270.3	3251.0
30°	3243.2	3211.9	3153.8	3142.3	3126.7
32.5°	3118.9	3095.9	3033.7	3010.2	2994.6
35°	2998.7	2960.1	2897.8	2874.4	2855.1
37.5°	2862.9	2827.9	2765.8	2738.6	2719.2
40°	2723.4	2692.1	2630.0	2595.4	2579.7
42.5°	2587.6	2556.3	2494.5	2455.4	2432.4
45°	2440.2	2413.0	2354.6	2312.2	2296.6
47.5°	2296.6	2269.5	2207.2	2164.5	2141.4
50°	2145.1	2125.8	2071.4	2017.1	1997.8
52.5°	1997.8	1970.6	1920.4	1877.5	1850.4
55°	1846.7	1823.3	1776.8	1730.2	1710.9
57.5°	1695.3	1675.9	1625.3	1578.8	1563.1
60°	1543.8	1528.6	1474.2	1431.4	1419.9
62.5°	1396.5	1369.3	1330.6	1291.9	1276.3
65°	1245.4	1221.9	1183.3	1148.3	1129.0
67.5°	1090.2	1070.5	1035.9	1008.8	993.2
70°	946.6	930.9	896.0	868.8	853.6
72.5°	799.3	783.6	764.3	737.2	725.6
75°	651.5	644.1	624.3	601.3	609.2
77.5°	519.8	504.2	496.3	484.8	473.3
80°	388.1	384.0	376.2	364.7	356.8
82.5°	263.8	263.8	260.1	244.5	244.5
85°	158.9	155.1	151.5	139.5	135.8
87.5°	69.9	62.1	54.3	42.8	38.6
90°	2.2	25.9	70.5	66.2	68.3
92.5°	44.6	60.4	62.6	64.7	64.7
95°	105.0	125.1	128.7	128.7	125.1
97.5°	174.7	193.4	201.3	201.3	201.3
100°	255.2	271.7	277.5	277.5	275.3
102.5°	340.1	352.3	360.1	362.3	360.1
105°	432.8	438.6	442.9	446.5	446.5
107.5°	524.8	533.5	533.5	534.9	524.8
110°	614.0	625.5	625.5	625.5	619.7

TEST NUMBER: P903880

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US830-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	710.3	722.6	720.4	714.6	710.3
115°	805.2	816.7	813.1	811.0	805.2
117.5°	899.4	915.2	905.1	899.4	893.6
120°	994.3	1010.1	994.3	994.3	987.8
122.5°	1080.5	1100.7	1090.6	1084.9	1080.5
125°	1171.1	1189.1	1183.4	1176.9	1174.8
127.5°	1259.6	1281.9	1273.9	1265.4	1259.6
130°	1342.3	1368.1	1364.5	1360.3	1352.4
132.5°	1435.0	1455.1	1456.6	1446.5	1440.8
135°	1514.8	1537.1	1541.4	1539.3	1533.5
137.5°	1603.9	1621.9	1625.5	1624.1	1615.4
140°	1682.3	1700.3	1710.3	1710.3	1702.4
142.5°	1762.8	1780.8	1786.6	1788.8	1780.8
145°	1839.1	1853.4	1864.9	1867.1	1859.2
147.5°	1907.3	1925.3	1933.9	1937.6	1929.7
150°	1977.8	1990.0	1997.9	2004.4	1997.9
152.5°	2040.3	2052.6	2062.7	2070.6	2062.7
155°	2102.9	2108.7	2115.2	2125.2	2118.7
157.5°	2156.8	2161.2	2164.7	2179.1	2169.1
160°	2205.0	2209.3	2211.5	2223.6	2215.1
162.5°	2249.6	2249.6	2251.7	2265.4	2255.3
165°	2287.6	2285.5	2285.5	2299.9	2289.8
167.5°	2322.1	2315.7	2315.7	2330.1	2320.0
170°	2348.1	2342.3	2340.1	2354.6	2342.3
172.5°	2366.1	2360.3	2358.1	2372.5	2360.3
175°	2380.4	2374.6	2370.3	2384.7	2372.5
177.5°	2388.3	2382.6	2378.2	2390.5	2378.2
180°	2384.7	2384.7	2384.7	2384.7	2384.7

TEST NUMBER: P903880

CATALOG NUMBER: DFN2DIP-SQ3F0-110D080US830-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	13.48	14.45	14.34	15.33	16.44	13.04	14.00	13.90	14.89	16.00
	3H	15.15	16.01	16.02	16.91	18.04	14.66	15.52	15.53	16.42	17.55
	4H	15.74	16.56	16.62	17.45	18.60	15.24	16.06	16.13	16.96	18.11
	6H	16.14	16.89	17.04	17.80	18.96	15.64	16.39	16.54	17.30	18.46
	8H	16.24	16.96	17.15	17.89	19.05	15.74	16.46	16.65	17.38	18.54
	12H	16.29	16.98	17.21	17.90	19.08	15.79	16.47	16.70	17.39	18.57
4H	2H	13.95	14.77	14.85	15.67	16.82	13.60	14.42	14.49	15.32	16.46
	3H	15.82	16.51	16.73	17.44	18.60	15.42	16.10	16.32	17.03	18.19
	4H	16.54	17.16	17.45	18.09	19.27	16.11	16.74	17.03	17.66	18.85
	6H	17.05	17.59	17.98	18.54	19.73	16.62	17.16	17.55	18.11	19.30
	8H	17.20	17.71	18.14	18.65	19.85	16.77	17.27	17.70	18.21	19.42
	12H	17.28	17.73	18.23	18.69	19.90	16.83	17.29	17.78	18.25	19.45
8H	4H	16.74	17.24	17.67	18.18	19.39	16.36	16.87	17.29	17.81	19.01
	6H	17.37	17.79	18.33	18.77	19.97	16.98	17.40	17.94	18.39	19.59
	8H	17.59	17.96	18.55	18.93	20.15	17.19	17.56	18.16	18.54	19.76
	12H	17.72	18.04	18.69	19.01	20.28	17.31	17.63	18.28	18.60	19.87
12H	4H	16.73	17.18	17.68	18.14	19.35	16.36	16.81	17.31	17.77	18.98
	6H	17.40	17.77	18.36	18.74	19.96	17.02	17.39	17.99	18.37	19.59
	8H	17.64	17.97	18.61	18.93	20.20	17.26	17.58	18.23	18.55	19.82