

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906362

Luminaire Tested: DFN2DIP-SQ3F0-040D090US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906362
REPORT IS A COMBINATION OF REPORTS P899952 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D090US835-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 11365.0 lumens
Efficiency: N/A
Efficacy: 112.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 100.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906362

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US835-RLLFLL

Luminous Intensity Polar Plot

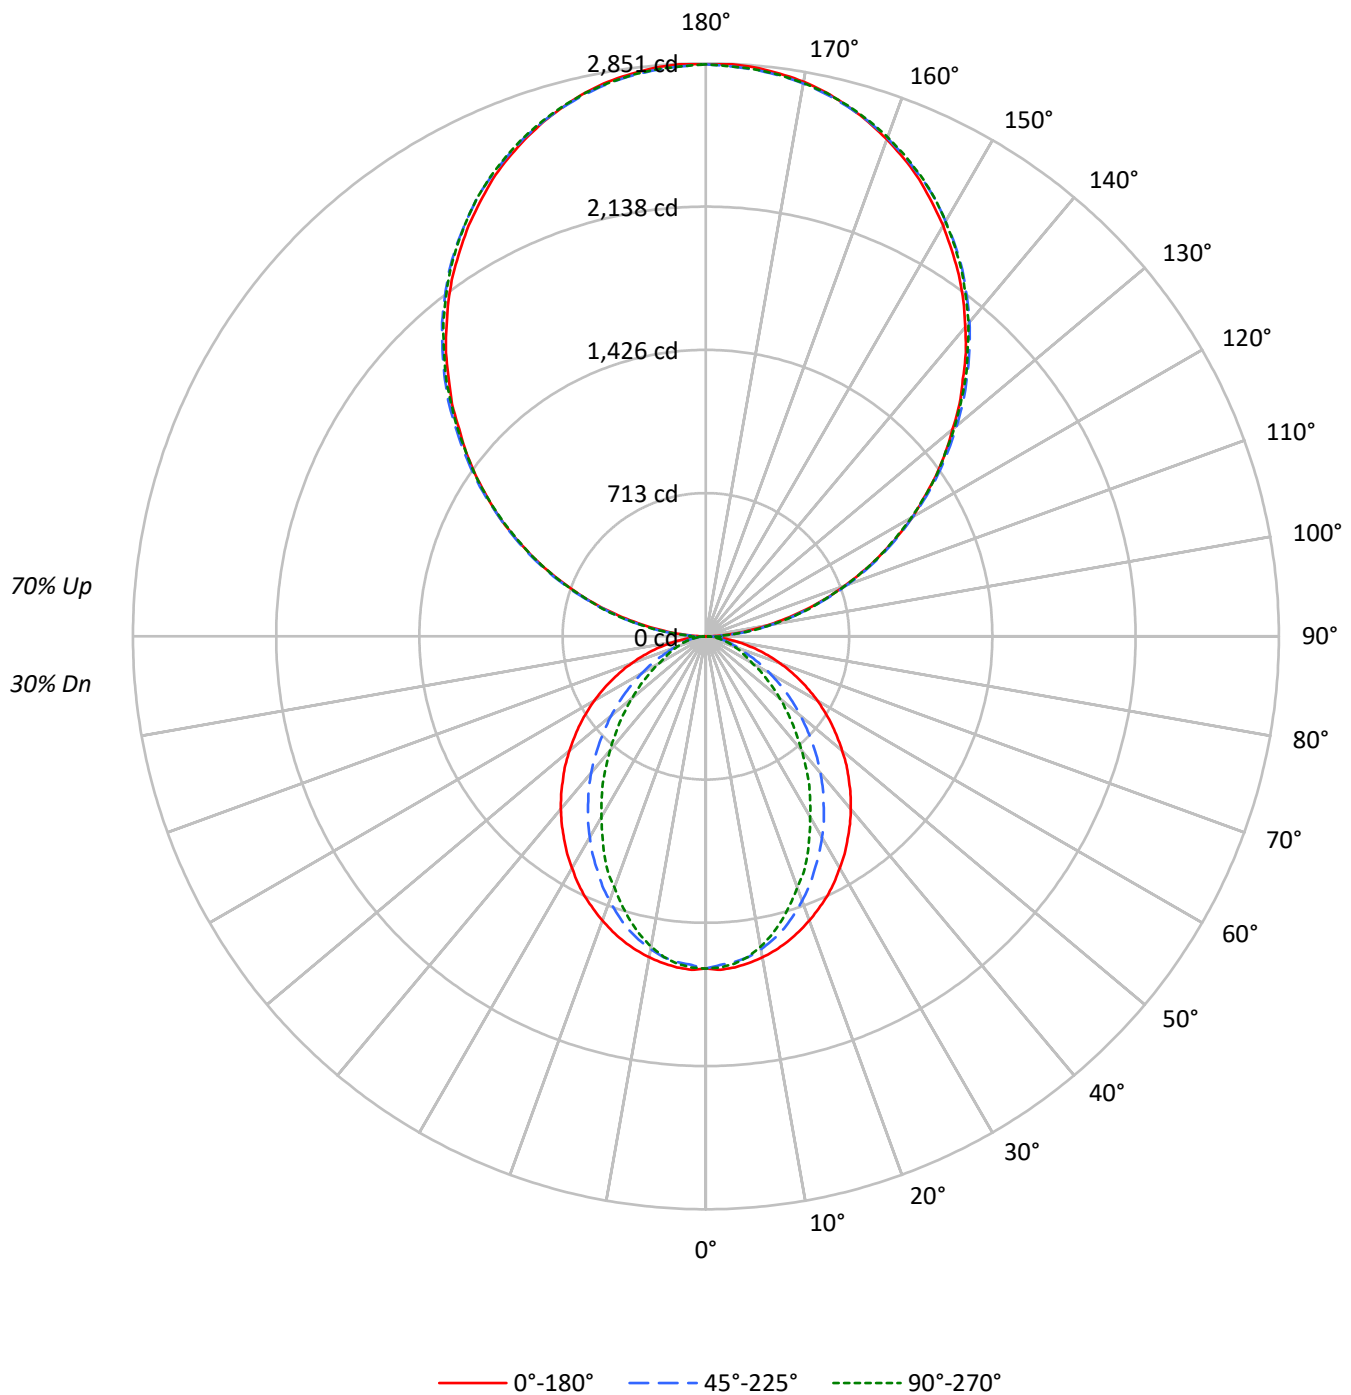

TEST NUMBER: P906362

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	102	102	102	102	92	92	92	92	72	72	72	54	54	54	38	38	38
1	94	89	86	83	84	80	77	75	64	62	60	48	47	46	34	33	32
2	85	78	73	68	76	71	66	62	56	53	50	43	40	38	30	29	28
3	78	69	62	57	70	62	57	52	50	46	42	38	35	33	27	25	24
4	71	61	54	48	64	55	49	44	44	40	36	34	31	28	24	22	21
5	66	55	47	41	59	49	43	38	40	35	31	30	27	25	22	20	18
6	60	49	41	36	54	44	38	33	36	31	27	28	24	22	20	18	16
7	56	44	37	31	50	40	33	29	32	27	24	25	22	19	18	16	14
8	52	40	33	28	46	36	30	25	29	25	21	23	20	17	17	15	13
9	48	36	29	25	43	33	27	23	27	22	19	21	18	15	16	13	12
10	45	33	27	22	40	30	24	20	25	20	17	19	16	14	14	12	11

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1894	1894	1894
5°	1896	1863	1876
10°	1876	1825	1814
15°	1849	1764	1719
20°	1814	1679	1603
25°	1777	1585	1490
30°	1729	1488	1348
35°	1682	1385	1223
40°	1634	1278	1080
45°	1578	1159	951
50°	1520	1039	824
55°	1459	911	703
60°	1389	778	578
65°	1308	642	519
70°	1210	516	469
75°	1086	452	425
80°	908	375	367
85°	616	244	272

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 2862 cd/sqm

TEST NUMBER: P906362

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.9	1.4
10°-20°	425.3	3.7
20°-30°	597.2	5.3
30°-40°	650.9	5.7
40°-50°	598.3	5.3
50°-60°	469.9	4.1
60°-70°	305.8	2.7
70°-80°	157.4	1.4
80°-90°	48.3	0.4
90°-100°	176.1	1.5
100°-110°	559.6	4.9
110°-120°	957.7	8.4
120°-130°	1259.5	11.1
130°-140°	1413.8	12.4
140°-150°	1386.4	12.2
150°-160°	1163.0	10.2
160°-170°	771.2	6.8
170°-180°	269.6	2.4
0°-30°	1177.4	10.4
0°-40°	1828.4	16.1
0°-60°	2896.5	25.5
0°-90°	3408.1	30.0
90°-120°	1693.5	14.9
90°-150°	5753.1	50.6
90°-180°	7957.0	70.0
0°-180°	11365.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	3	31	84	79	82	11
95°	125	149	154	154	149	139
105°	517	523	529	533	533	545
115°	961	975	970	968	961	951
125°	1398	1419	1412	1405	1402	1249
135°	1808	1835	1840	1837	1830	1398
145°	2195	2212	2226	2228	2219	1372
155°	2510	2517	2525	2537	2529	1155
165°	2730	2728	2728	2745	2733	770
175°	2841	2834	2829	2846	2832	270
180°	2846	2846	2846	2846	2846	

TEST NUMBER: P906362

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	2.6	30.9	84.1	78.9	81.5
92.5°	53.2	72.1	74.7	77.2	77.2
95°	125.3	149.3	153.6	153.6	149.3
97.5°	208.5	230.8	240.3	240.3	240.3
100°	304.6	324.4	331.2	331.2	328.7
102.5°	405.9	420.5	429.9	432.5	429.9
105°	516.6	523.4	528.6	532.9	532.9
107.5°	626.4	636.7	636.7	638.4	626.4
110°	732.8	746.6	746.6	746.6	739.7

TEST NUMBER: P906362

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	847.8	862.4	859.8	853.0	847.8
115°	961.1	974.8	970.5	968.0	961.1
117.5°	1073.5	1092.4	1080.4	1073.5	1066.6
120°	1186.8	1205.6	1186.8	1186.8	1179.0
122.5°	1289.7	1313.8	1301.8	1294.9	1289.7
125°	1397.9	1419.3	1412.5	1404.7	1402.2
127.5°	1503.4	1530.0	1520.6	1510.3	1503.4
130°	1602.1	1633.0	1628.7	1623.5	1614.1
132.5°	1712.8	1736.8	1738.5	1726.5	1719.7
135°	1808.0	1834.6	1839.8	1837.2	1830.4
137.5°	1914.4	1935.9	1940.2	1938.5	1928.2
140°	2008.0	2029.4	2041.4	2041.4	2032.0
142.5°	2104.1	2125.5	2132.4	2135.0	2125.5
145°	2195.1	2212.2	2225.9	2228.5	2219.1
147.5°	2276.6	2298.0	2308.3	2312.6	2303.2
150°	2360.7	2375.3	2384.7	2392.4	2384.7
152.5°	2435.3	2449.9	2461.9	2471.4	2461.9
155°	2510.0	2516.8	2524.6	2536.6	2528.9
157.5°	2574.3	2579.5	2583.8	2600.9	2588.9
160°	2631.8	2637.0	2639.6	2654.1	2643.8
162.5°	2685.0	2685.0	2687.6	2703.9	2691.9
165°	2730.5	2727.9	2727.9	2745.1	2733.1
167.5°	2771.7	2764.0	2764.0	2781.1	2769.1
170°	2802.6	2795.7	2793.2	2810.3	2795.7
172.5°	2824.0	2817.2	2814.6	2831.8	2817.2
175°	2841.2	2834.3	2829.2	2846.4	2831.8
177.5°	2850.6	2843.8	2838.6	2853.2	2838.6
180°	2846.4	2846.4	2846.4	2846.4	2846.4

TEST NUMBER: P906362

CATALOG NUMBER: DFN2DIP-SQ3F0-040D090US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.10	7.79	8.21	8.89	10.43	3.06	3.75	4.17	4.85	6.39
	3H	8.76	9.37	9.88	10.49	12.04	4.23	4.84	5.35	5.96	7.51
	4H	9.36	9.94	10.49	11.06	12.61	4.67	5.25	5.80	6.37	7.92
	6H	9.77	10.31	10.91	11.42	12.99	4.97	5.51	6.12	6.63	8.20
	8H	9.89	10.40	11.03	11.53	13.09	5.06	5.57	6.20	6.70	8.26
	12H	9.94	10.43	11.09	11.56	13.14	5.09	5.58	6.24	6.71	8.29
4H	2H	7.09	7.68	8.24	8.80	10.35	3.63	4.22	4.77	5.33	6.89
	3H	8.91	9.39	10.05	10.54	12.10	4.96	5.45	6.11	6.59	8.16
	4H	9.59	10.04	10.74	11.17	12.75	5.50	5.95	6.65	7.08	8.66
	6H	10.09	10.47	11.25	11.63	13.21	5.90	6.29	7.06	7.44	9.02
	8H	10.26	10.62	11.42	11.76	13.36	6.03	6.38	7.18	7.53	9.12
	12H	10.35	10.67	11.52	11.83	13.43	6.08	6.40	7.25	7.56	9.16
8H	4H	9.54	9.90	10.70	11.05	12.64	5.77	6.12	6.92	7.27	8.86
	6H	10.10	10.39	11.27	11.58	13.17	6.27	6.57	7.45	7.75	9.34
	8H	10.31	10.57	11.49	11.74	13.35	6.46	6.71	7.64	7.88	9.49
	12H	10.44	10.67	11.63	11.83	13.48	6.56	6.79	7.75	7.95	9.60
12H	4H	9.49	9.81	10.66	10.97	12.57	5.76	6.09	6.93	7.24	8.84
	6H	10.07	10.33	11.25	11.50	13.11	6.32	6.57	7.50	7.74	9.35
	8H	10.28	10.51	11.47	11.67	13.32	6.52	6.74	7.70	7.91	9.55