

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906364

Luminaire Tested: DFN2DIP-SQ3F0-040D100US835-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906364  
REPORT IS A COMBINATION OF REPORTS P899969 AND P896733  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-040D100US835-FLLFL  
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 12810.0 lumens  
Efficiency: N/A  
Efficacy: 116.7 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 109.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9933  
Total Harmonic Distortion (THDi): 0.066  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906364  
CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US835-FLLFLL

### Luminous Intensity Polar Plot

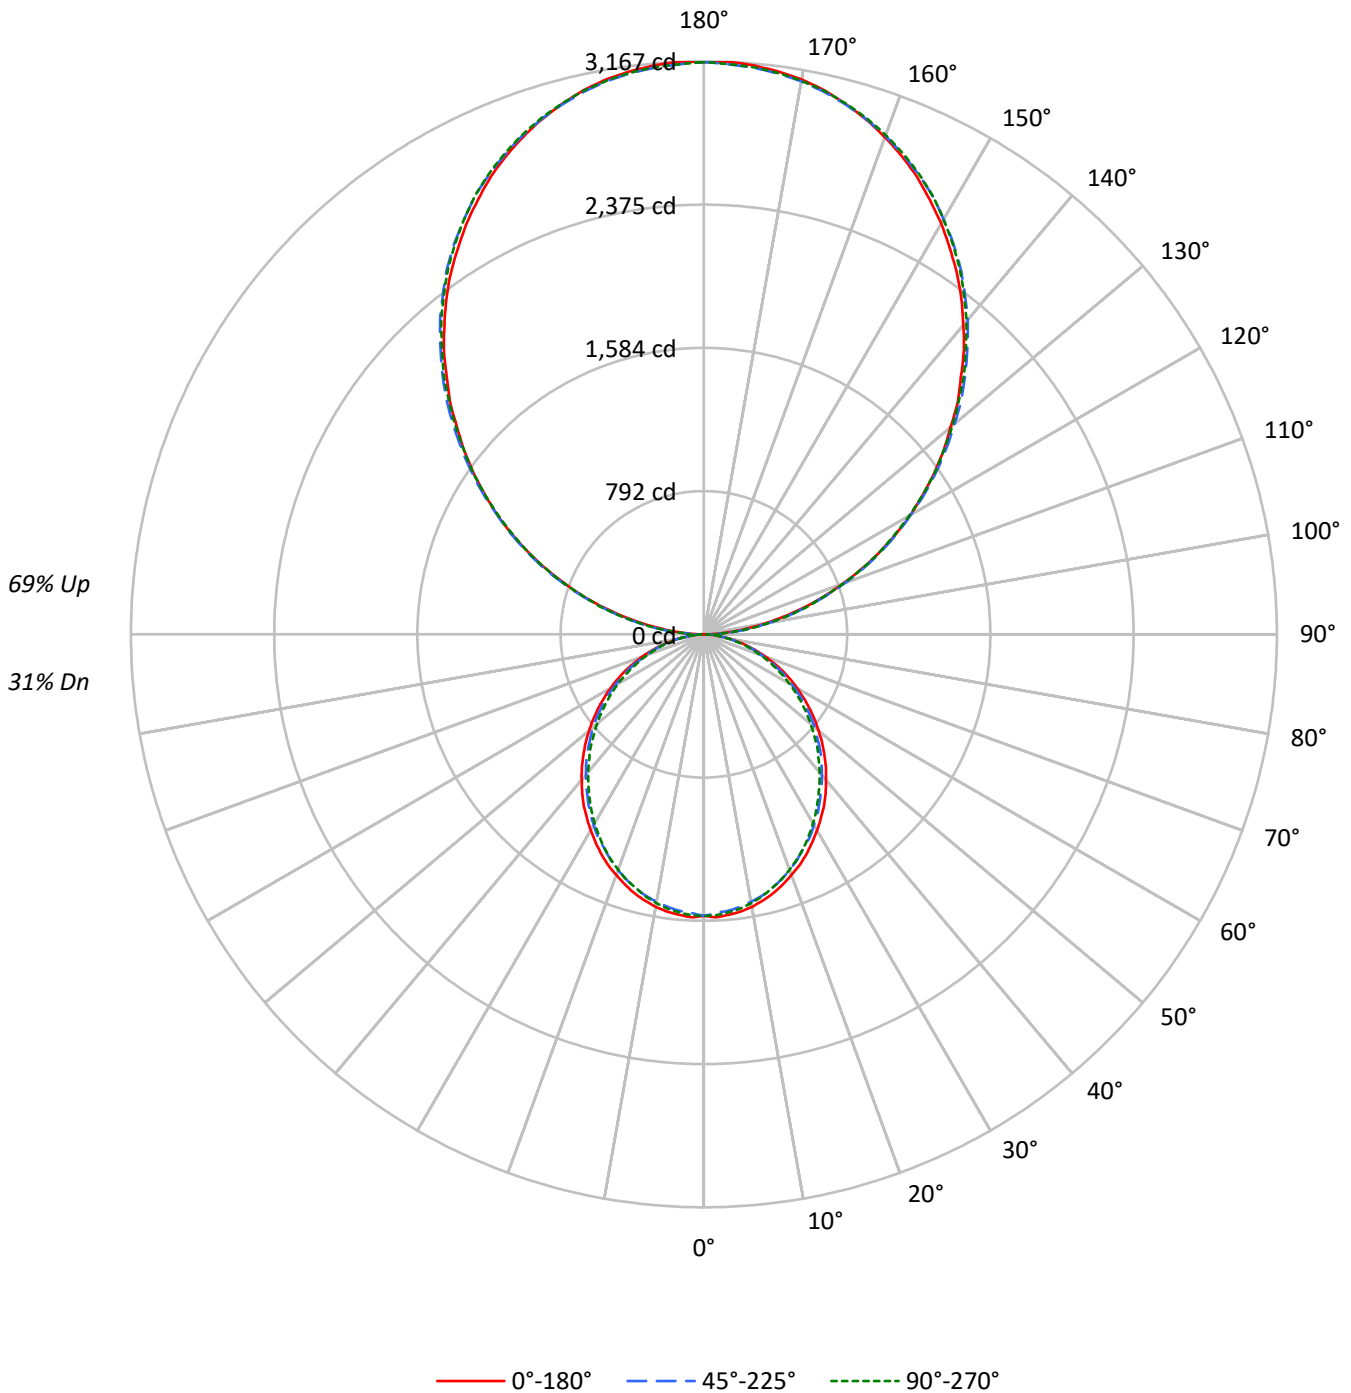



TEST NUMBER: P906364

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US835-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20
RC	80				70				50				30				10				0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	103	103	103	103	92	92	92	92	73	73	73	55	55	55	39	39	39	39	39	39	31
1	94	89	86	82	84	80	77	74	64	61	60	48	47	46	34	33	33	34	33	33	26
2	85	78	72	67	76	70	65	61	56	52	49	42	40	38	30	29	27	30	29	27	22
3	78	68	61	56	69	62	56	51	49	45	41	37	35	32	27	25	23	27	25	23	18
4	71	60	53	47	63	55	48	43	44	39	35	33	30	28	24	22	20	24	22	20	16
5	65	54	46	40	58	49	42	37	39	34	30	30	26	24	21	19	17	21	19	17	14
6	60	48	40	35	54	44	37	32	35	30	26	27	23	21	19	17	15	19	17	15	12
7	55	43	36	30	49	39	33	28	32	27	23	24	21	18	18	15	14	18	15	14	11
8	51	39	32	27	46	36	29	24	29	24	20	22	19	16	16	14	12	16	14	12	10
9	47	36	28	24	43	32	26	22	26	21	18	20	17	15	15	13	11	15	13	11	9
10	44	33	26	21	40	30	24	19	24	19	16	19	15	13	14	12	10	14	12	10	8

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	1783	1783	1783
5°	1785	1757	1770
10°	1769	1733	1745
15°	1742	1703	1707
20°	1706	1662	1668
25°	1670	1613	1623
30°	1625	1568	1566
35°	1582	1515	1506
40°	1530	1461	1449
45°	1477	1407	1390
50°	1420	1350	1322
55°	1360	1285	1260
60°	1292	1207	1188
65°	1218	1126	1104
70°	1123	1028	1012
75°	992	910	927
80°	834	759	767
85°	587	503	502

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 3182 cd/sqm



TEST NUMBER: P906364

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US835-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	146.5	1.1
10°-20°	412.2	3.2
20°-30°	605.7	4.7
30°-40°	703.5	5.5
40°-50°	702.6	5.5
50°-60°	612.7	4.8
60°-70°	452.9	3.5
70°-80°	256.2	2.0
80°-90°	76.6	0.6
90°-100°	195.7	1.5
100°-110°	621.8	4.9
110°-120°	1064.1	8.3
120°-130°	1399.5	10.9
130°-140°	1570.9	12.3
140°-150°	1540.4	12.0
150°-160°	1292.2	10.1
160°-170°	856.9	6.7
170°-180°	299.5	2.3
0°-30°	1164.4	9.1
0°-40°	1867.9	14.6
0°-60°	3183.2	24.8
0°-90°	3969.0	31.0
90°-120°	1881.6	14.7
90°-150°	6392.4	49.9
90°-180°	8841.0	69.0
0°-180°	12810.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1556	1556	1556	1556	1556	
5°	1556	1550	1534	1546	1543	148
15°	1482	1473	1453	1459	1452	417
25°	1341	1329	1304	1306	1304	617
35°	1157	1142	1118	1109	1102	722
45°	941	931	908	892	886	727
55°	712	703	686	668	660	637
65°	480	471	456	443	436	475
75°	251	248	241	232	235	268
85°	61	60	58	54	52	68
90°	3	34	93	88	91	13
95°	139	166	171	171	166	155
105°	574	582	587	592	592	606
115°	1068	1083	1078	1076	1068	1056
125°	1553	1577	1569	1561	1558	1388
135°	2009	2038	2044	2041	2034	1553
145°	2439	2458	2473	2476	2466	1524
155°	2789	2796	2805	2818	2810	1284
165°	3034	3031	3031	3050	3037	856
175°	3157	3149	3144	3163	3146	300
180°	3163	3163	3163	3163	3163	



TEST NUMBER: P906364

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US835-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1556.4	1556.4	1556.4	1556.4	1556.4
2.5°	1565.5	1558.0	1541.5	1556.4	1553.6
5°	1556.4	1550.5	1534.0	1545.9	1543.1
7.5°	1545.9	1537.0	1520.5	1532.6	1529.6
10°	1529.6	1519.1	1501.2	1513.1	1508.6
12.5°	1507.0	1498.1	1480.2	1487.7	1484.6
15°	1481.6	1472.7	1453.2	1459.2	1451.8
17.5°	1450.2	1441.3	1421.8	1429.2	1421.8
20°	1415.7	1406.8	1385.9	1390.3	1384.5
22.5°	1381.4	1367.9	1348.4	1348.4	1345.4
25°	1340.9	1329.0	1303.6	1306.5	1303.6
27.5°	1296.0	1285.5	1266.2	1261.7	1254.3
30°	1251.2	1239.2	1216.8	1212.3	1206.3
32.5°	1203.3	1194.4	1170.4	1161.4	1155.3
35°	1156.9	1142.0	1118.0	1109.0	1101.5
37.5°	1104.5	1091.0	1067.0	1056.6	1049.1
40°	1050.7	1038.6	1014.6	1001.3	995.3
42.5°	998.3	986.2	962.4	947.3	938.4
45°	941.4	931.0	908.4	892.1	886.0
47.5°	886.0	875.5	851.6	835.1	826.2
50°	827.6	820.1	799.2	778.2	770.7
52.5°	770.7	760.3	740.9	724.4	713.9
55°	712.5	703.4	685.5	667.5	660.1
57.5°	654.0	646.6	627.0	609.1	603.1
60°	595.6	589.7	568.8	552.3	547.8
62.5°	538.8	528.3	513.4	498.4	492.4
65°	480.5	471.4	456.5	443.0	435.6
67.5°	420.6	413.0	399.7	389.2	383.2
70°	365.2	359.2	345.7	335.2	329.3
72.5°	308.4	302.3	294.9	284.4	279.9
75°	251.4	248.5	240.9	232.0	235.0
77.5°	200.5	194.5	191.5	187.0	182.6
80°	149.7	148.1	145.1	140.7	137.7
82.5°	101.8	101.8	100.4	94.3	94.3
85°	61.3	59.9	58.4	53.8	52.4
87.5°	27.0	24.0	21.0	16.5	14.9
90°	2.9	34.3	93.4	87.7	90.6
92.5°	59.1	80.1	83.0	85.8	85.8
95°	139.2	165.9	170.7	170.7	165.9
97.5°	231.7	256.5	267.0	267.0	267.0
100°	338.5	360.4	368.0	368.0	365.2
102.5°	451.0	467.2	477.7	480.5	477.7
105°	574.0	581.6	587.3	592.1	592.1
107.5°	696.0	707.5	707.5	709.4	696.0
110°	814.3	829.5	829.5	829.5	821.9



TEST NUMBER: P906364

CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US835-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	942.0	958.2	955.4	947.7	942.0
115°	1067.9	1083.1	1078.4	1075.5	1067.9
117.5°	1192.8	1213.8	1200.4	1192.8	1185.1
120°	1318.6	1339.6	1318.6	1318.6	1310.1
122.5°	1433.0	1459.7	1446.4	1438.8	1433.0
125°	1553.2	1577.0	1569.4	1560.8	1558.0
127.5°	1670.5	1700.0	1689.5	1678.1	1670.5
130°	1780.1	1814.4	1809.7	1803.9	1793.5
132.5°	1903.1	1929.8	1931.7	1918.4	1910.7
135°	2008.9	2038.5	2044.2	2041.4	2033.7
137.5°	2127.2	2151.0	2155.8	2153.9	2142.4
140°	2231.1	2254.9	2268.3	2268.3	2257.8
142.5°	2337.9	2361.7	2369.3	2372.2	2361.7
145°	2438.9	2458.0	2473.3	2476.1	2465.6
147.5°	2529.5	2553.4	2564.8	2569.6	2559.1
150°	2623.0	2639.2	2649.7	2658.2	2649.7
152.5°	2705.9	2722.1	2735.5	2746.0	2735.5
155°	2788.9	2796.5	2805.1	2818.4	2809.8
157.5°	2860.4	2866.1	2870.9	2889.9	2876.6
160°	2924.3	2930.0	2932.8	2949.0	2937.6
162.5°	2983.4	2983.4	2986.2	3004.3	2991.0
165°	3033.9	3031.0	3031.0	3050.1	3036.8
167.5°	3079.7	3071.1	3071.1	3090.2	3076.8
170°	3114.0	3106.4	3103.5	3122.6	3106.4
172.5°	3137.8	3130.2	3127.3	3146.4	3130.2
175°	3156.9	3149.3	3143.6	3162.6	3146.4
177.5°	3167.4	3159.8	3154.0	3170.2	3154.0
180°	3162.6	3162.6	3162.6	3162.6	3162.6



TEST NUMBER: P906364  
 CATALOG NUMBER: DFN2DIP-SQ3F0-040D100US835-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	7.16	7.88	8.27	8.98	10.50	6.72	7.43	7.82	8.53	10.05
	3H	8.81	9.45	9.92	10.56	12.09	8.32	8.96	9.43	10.07	11.60
	4H	9.39	9.99	10.51	11.10	12.64	8.89	9.50	10.01	10.61	12.15
	6H	9.77	10.33	10.91	11.45	13.00	9.27	9.83	10.41	10.95	12.50
	8H	9.87	10.40	11.01	11.53	13.08	9.37	9.90	10.51	11.03	12.58
	12H	9.91	10.42	11.05	11.54	13.11	9.40	9.91	10.54	11.03	12.60
4H	2H	7.60	8.21	8.73	9.32	10.86	7.25	7.85	8.38	8.96	10.51
	3H	9.45	9.96	10.59	11.09	12.65	9.04	9.55	10.18	10.68	12.24
	4H	10.15	10.62	11.29	11.74	13.32	9.73	10.19	10.87	11.32	12.89
	6H	10.66	11.05	11.80	12.20	13.77	10.22	10.62	11.37	11.77	13.34
	8H	10.80	11.17	11.94	12.31	13.89	10.36	10.73	11.51	11.87	13.46
	12H	10.86	11.20	12.03	12.35	13.94	10.41	10.75	11.58	11.90	13.49
8H	4H	10.33	10.71	11.48	11.85	13.43	9.96	10.33	11.10	11.47	13.05
	6H	10.95	11.26	12.12	12.44	14.02	10.57	10.88	11.73	12.06	13.64
	8H	11.17	11.44	12.34	12.60	14.20	10.78	11.04	11.95	12.21	13.80
	12H	11.29	11.53	12.47	12.68	14.32	10.88	11.11	12.05	12.27	13.91
12H	4H	10.31	10.65	11.47	11.80	13.39	9.94	10.28	11.10	11.43	13.02
	6H	10.98	11.25	12.15	12.41	14.01	10.61	10.88	11.78	12.04	13.64
	8H	11.21	11.45	12.39	12.60	14.24	10.83	11.07	12.01	12.22	13.86