

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906370

Luminaire Tested: DFN2DIP-SQ3F0-040D110US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906370
REPORT IS A COMBINATION OF REPORTS P899988 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-040D110US835-RLLFLL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13135.0 lumens
Efficiency: N/A
Efficacy: 111.1 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Indirect

Input Watts (W): 118.2
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9933
Total Harmonic Distortion (THDi): 0.066
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906370

CATALOG NUMBER: DFN2DIP-SQ3F0-040D110US835-RLLFLL

Luminous Intensity Polar Plot

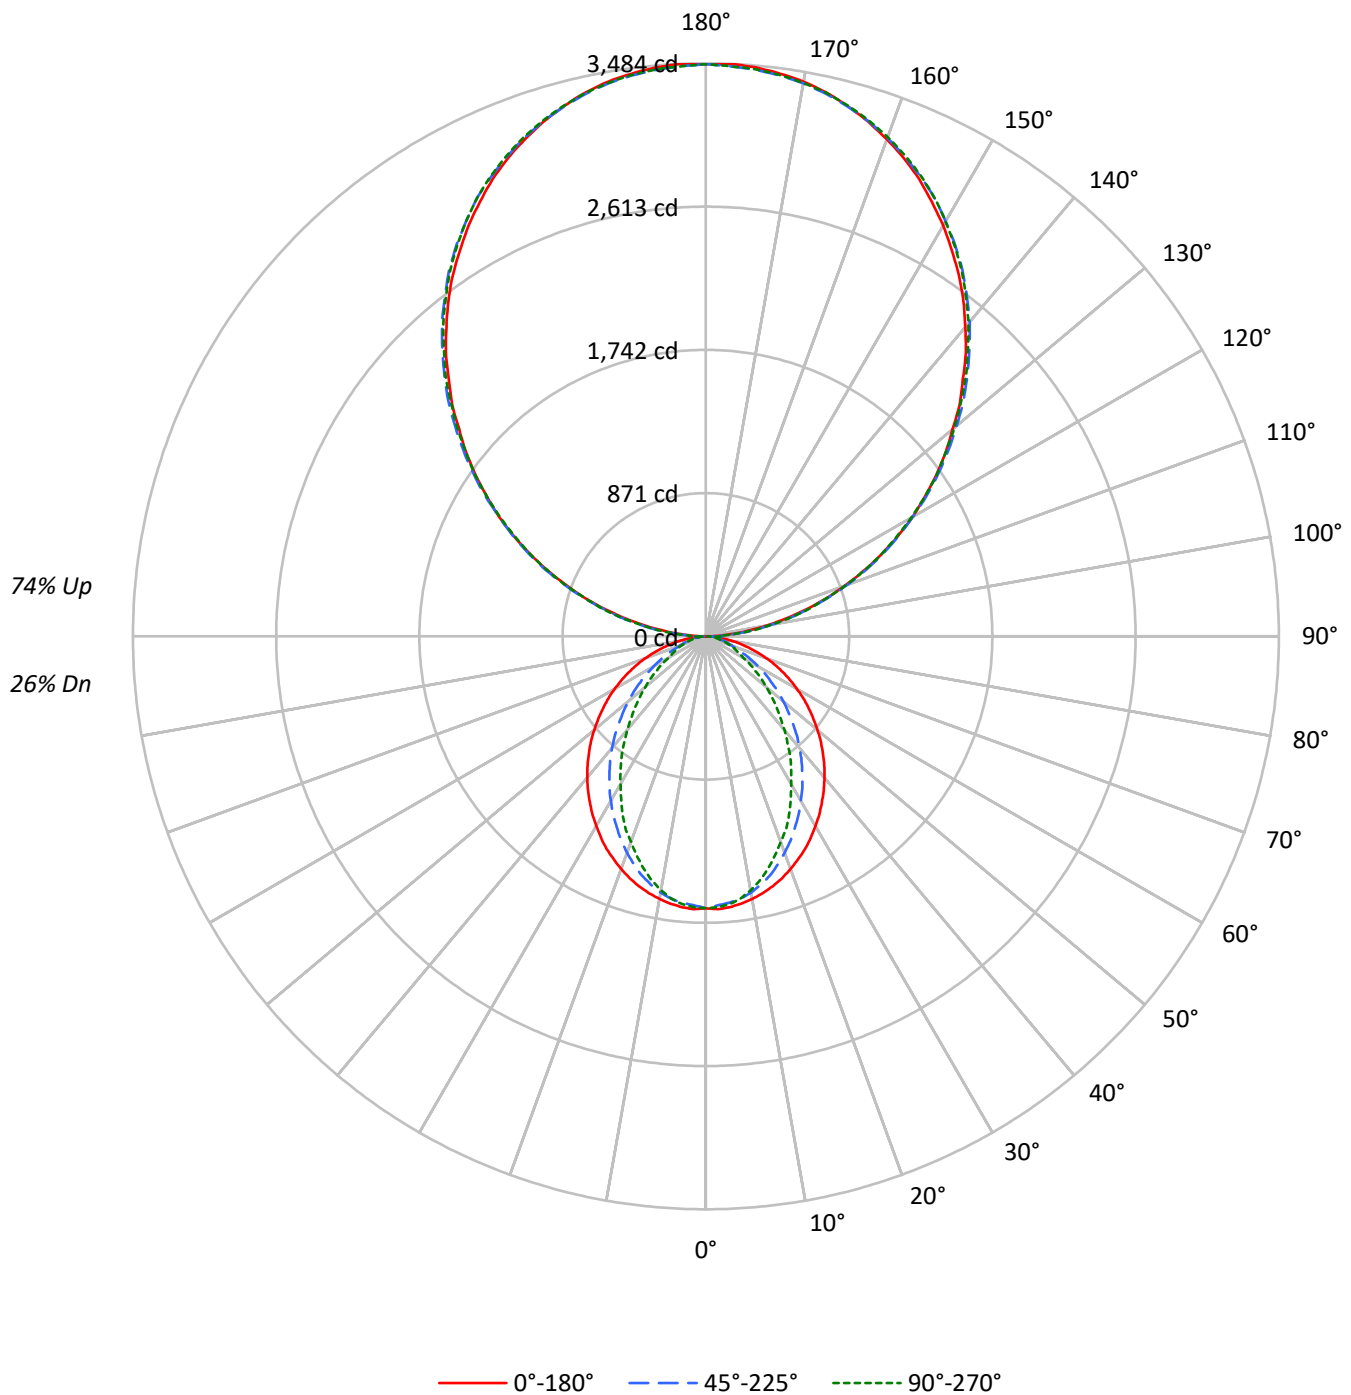

TEST NUMBER: P906370

CATALOG NUMBER: DFN2DIP-SQ3F0-040D110US835-RLLFLL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20					20					20					20					20
RC	80					70					50					30					0
RW	70	50	30	10		70	50	30	10		50	30	10		50	30	10		50	30	10
RCR																					
0	101	101	101	101		90	90	90	90		70	70	70		51	51	51		34	34	34
1	93	89	85	82		82	79	76	73		62	60	58		45	44	43		30	30	29
2	85	78	72	67		75	69	65	61		54	51	48		40	38	36		27	26	25
3	77	68	61	56		69	61	55	51		48	44	41		36	33	31		24	23	21
4	71	61	53	47		63	54	48	43		43	38	35		32	29	27		22	20	19
5	65	54	46	41		58	48	42	37		38	34	30		29	26	23		20	18	16
6	60	48	41	35		53	43	37	32		34	30	26		26	23	20		18	16	15
7	55	43	36	31		49	39	33	28		31	26	23		24	20	18		16	14	13
8	51	39	32	27		46	36	29	25		28	24	20		21	18	16		15	13	12
9	47	36	29	24		42	32	26	22		26	21	18		20	17	14		14	12	11
10	44	33	26	21		40	30	24	20		24	19	16		18	15	13		13	11	10

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	1894	1894	1894
5°	1896	1863	1876
10°	1876	1825	1814
15°	1849	1764	1719
20°	1814	1679	1603
25°	1777	1585	1490
30°	1729	1488	1348
35°	1682	1385	1223
40°	1634	1278	1080
45°	1578	1159	951
50°	1520	1039	824
55°	1459	911	703
60°	1389	778	578
65°	1308	642	519
70°	1210	516	469
75°	1086	452	425
80°	908	375	367
85°	616	244	272

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3498 cd/sqm

TEST NUMBER: P906370

CATALOG NUMBER: DFN2DIP-SQ3F0-040D110US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	154.9	1.2
10°-20°	425.3	3.2
20°-30°	597.2	4.5
30°-40°	650.9	5.0
40°-50°	598.3	4.6
50°-60°	469.9	3.6
60°-70°	305.8	2.3
70°-80°	157.4	1.2
80°-90°	50.1	0.4
90°-100°	215.3	1.6
100°-110°	684.0	5.2
110°-120°	1170.5	8.9
120°-130°	1539.4	11.7
130°-140°	1727.9	13.2
140°-150°	1694.4	12.9
150°-160°	1421.4	10.8
160°-170°	942.6	7.2
170°-180°	329.5	2.5
0°-30°	1177.4	9.0
0°-40°	1828.4	13.9
0°-60°	2896.5	22.1
0°-90°	3409.9	26.0
90°-120°	2069.8	15.8
90°-150°	7031.6	53.5
90°-180°	9725.0	74.0
0°-180°	13135.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1653	1653	1653	1653	1653	
5°	1653	1646	1626	1640	1635	157
15°	1572	1556	1505	1477	1462	443
25°	1427	1379	1281	1219	1197	656
35°	1230	1154	1022	928	895	770
45°	1005	905	748	642	606	776
55°	764	648	486	396	368	683
65°	516	395	260	210	205	512
75°	275	170	120	109	108	291
85°	64	33	28	28	28	74
90°	3	38	103	96	100	13
95°	153	182	188	188	182	170
105°	631	640	646	651	651	666
115°	1175	1191	1186	1183	1175	1162
125°	1708	1735	1726	1717	1714	1527
135°	2210	2242	2249	2246	2237	1708
145°	2683	2704	2721	2724	2712	1676
155°	3068	3076	3086	3100	3091	1412
165°	3337	3334	3334	3355	3340	941
175°	3473	3464	3458	3479	3461	330
180°	3479	3479	3479	3479	3479	

TEST NUMBER: P906370

CATALOG NUMBER: DFN2DIP-SQ3F0-040D110US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1653.2	1653.2	1653.2	1653.2	1653.2
2.5°	1660.7	1653.2	1636.7	1651.8	1648.7
5°	1653.2	1645.7	1626.2	1639.7	1635.3
7.5°	1639.7	1630.8	1609.9	1615.7	1608.3
10°	1621.8	1611.3	1581.4	1576.8	1568.0
12.5°	1599.4	1585.9	1545.4	1536.5	1520.0
15°	1572.4	1555.9	1505.1	1476.7	1461.8
17.5°	1541.0	1517.0	1454.1	1421.3	1397.3
20°	1505.1	1475.1	1400.3	1363.0	1330.0
22.5°	1466.2	1431.8	1344.9	1294.1	1271.8
25°	1427.3	1379.4	1280.6	1219.4	1196.8
27.5°	1381.0	1330.0	1220.8	1150.5	1116.0
30°	1331.6	1274.6	1154.9	1078.7	1038.3
32.5°	1283.7	1214.8	1092.2	1002.4	964.9
35°	1229.9	1153.5	1021.9	927.6	894.6
37.5°	1177.5	1095.1	956.0	852.7	815.4
40°	1122.1	1032.4	887.2	781.0	742.1
42.5°	1065.2	969.5	818.4	707.6	670.3
45°	1005.4	905.1	748.1	641.8	605.9
47.5°	948.6	842.4	680.8	574.5	541.6
50°	885.7	779.5	614.9	511.6	480.3
52.5°	824.3	712.1	552.1	453.3	424.9
55°	764.5	647.8	486.2	396.5	368.1
57.5°	703.2	583.5	427.9	344.1	320.2
60°	640.3	520.6	366.5	290.3	266.4
62.5°	579.1	459.4	314.1	242.4	230.5
65°	516.2	394.9	260.3	209.5	204.9
67.5°	456.4	335.1	209.5	184.0	179.5
70°	393.5	276.8	173.5	158.6	152.5
72.5°	333.7	222.9	145.1	133.2	130.2
75°	275.2	170.5	119.7	109.2	107.8
77.5°	217.0	121.1	94.3	88.3	85.2
80°	163.0	86.8	71.7	65.9	65.9
82.5°	113.7	58.4	49.4	46.3	46.3
85°	64.3	32.9	28.4	28.4	28.4
87.5°	24.0	11.9	11.9	10.5	10.5
90°	3.1	37.8	102.8	96.5	99.6
92.5°	65.0	88.1	91.2	94.4	94.4
95°	153.1	182.5	187.7	187.7	182.5
97.5°	254.9	282.1	293.7	293.7	293.7
100°	372.3	396.4	404.8	404.8	401.7
102.5°	496.1	513.9	525.5	528.6	525.5
105°	631.4	639.8	646.1	651.3	651.3
107.5°	765.6	778.2	778.2	780.3	765.6
110°	895.7	912.5	912.5	912.5	904.1

TEST NUMBER: P906370

CATALOG NUMBER: DFN2DIP-SQ3F0-040D110US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1036.2	1054.0	1050.9	1042.5	1036.2
115°	1174.7	1191.4	1186.2	1183.1	1174.7
117.5°	1312.1	1335.1	1320.4	1312.1	1303.7
120°	1450.5	1473.6	1450.5	1450.5	1441.1
122.5°	1576.4	1605.7	1591.0	1582.6	1576.4
125°	1708.5	1734.7	1726.3	1716.9	1713.7
127.5°	1837.5	1870.0	1858.5	1845.9	1837.5
130°	1958.1	1995.9	1990.6	1984.3	1972.8
132.5°	2093.4	2122.8	2124.9	2110.2	2101.8
135°	2209.8	2242.3	2248.6	2245.5	2237.1
137.5°	2339.9	2366.1	2371.3	2369.2	2356.7
140°	2454.2	2480.4	2495.1	2495.1	2483.6
142.5°	2571.7	2597.9	2606.3	2609.4	2597.9
145°	2682.8	2703.8	2720.6	2723.7	2712.2
147.5°	2782.5	2808.7	2821.3	2826.5	2815.0
150°	2885.3	2903.1	2914.6	2924.1	2914.6
152.5°	2976.5	2994.3	3009.0	3020.6	3009.0
155°	3067.8	3076.1	3085.6	3100.3	3090.8
157.5°	3146.4	3152.7	3157.9	3178.9	3164.2
160°	3216.7	3223.0	3226.1	3244.0	3231.4
162.5°	3281.7	3281.7	3284.9	3304.8	3290.1
165°	3337.3	3334.1	3334.1	3355.1	3340.4
167.5°	3387.6	3378.2	3378.2	3399.2	3384.5
170°	3425.4	3417.0	3413.9	3434.8	3417.0
172.5°	3451.6	3443.2	3440.1	3461.1	3443.2
175°	3472.6	3464.2	3457.9	3478.9	3461.1
177.5°	3484.1	3475.7	3469.4	3487.3	3469.4
180°	3478.9	3478.9	3478.9	3478.9	3478.9

TEST NUMBER: P906370

CATALOG NUMBER: DFN2DIP-SQ3F0-040D110US835-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	6.51	7.17	7.65	8.30	9.88	2.47	3.13	3.61	4.26	5.84
	3H	8.17	8.76	9.32	9.90	11.50	3.64	4.23	4.79	5.37	6.97
	4H	8.77	9.33	9.93	10.47	12.07	4.08	4.64	5.24	5.78	7.38
	6H	9.18	9.70	10.34	10.84	12.45	4.38	4.90	5.55	6.04	7.65
	8H	9.30	9.79	10.47	10.95	12.55	4.47	4.96	5.64	6.12	7.72
	12H	9.35	9.82	10.52	10.97	12.59	4.50	4.97	5.67	6.12	7.74
4H	2H	6.50	7.07	7.67	8.21	9.81	3.04	3.61	4.21	4.74	6.34
	3H	8.31	8.78	9.48	9.95	11.56	4.37	4.84	5.54	6.00	7.62
	4H	8.99	9.43	10.17	10.58	12.21	4.90	5.34	6.08	6.49	8.12
	6H	9.50	9.87	10.68	11.04	12.66	5.31	5.68	6.49	6.85	8.47
	8H	9.67	10.01	10.84	11.18	12.81	5.43	5.78	6.61	6.94	8.58
	12H	9.75	10.06	10.94	11.24	12.88	5.48	5.80	6.68	6.97	8.62
8H	4H	8.95	9.29	10.13	10.46	12.10	5.17	5.52	6.35	6.68	8.32
	6H	9.50	9.79	10.70	11.00	12.63	5.67	5.96	6.87	7.17	8.80
	8H	9.72	9.96	10.92	11.15	12.80	5.86	6.11	7.06	7.29	8.95
	12H	9.84	10.06	11.05	11.25	12.93	5.97	6.18	7.17	7.37	9.05
12H	4H	8.89	9.21	10.09	10.38	12.03	5.17	5.48	6.36	6.66	8.30
	6H	9.48	9.73	10.68	10.91	12.57	5.72	5.97	6.92	7.16	8.81
	8H	9.69	9.91	10.89	11.09	12.78	5.92	6.14	7.12	7.32	9.01

END OF REPORT