

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906382

Luminaire Tested: DFN2DIP-SQ3F0-050D050US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906382
REPORT IS A COMBINATION OF REPORTS P899882 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-050D050US835-RLFL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8675.0 lumens
Efficiency: N/A
Efficacy: 109.7 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 79.1
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9789
Total Harmonic Distortion (THDi): 0.074
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906382

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US835-RLLFLL

Luminous Intensity Polar Plot

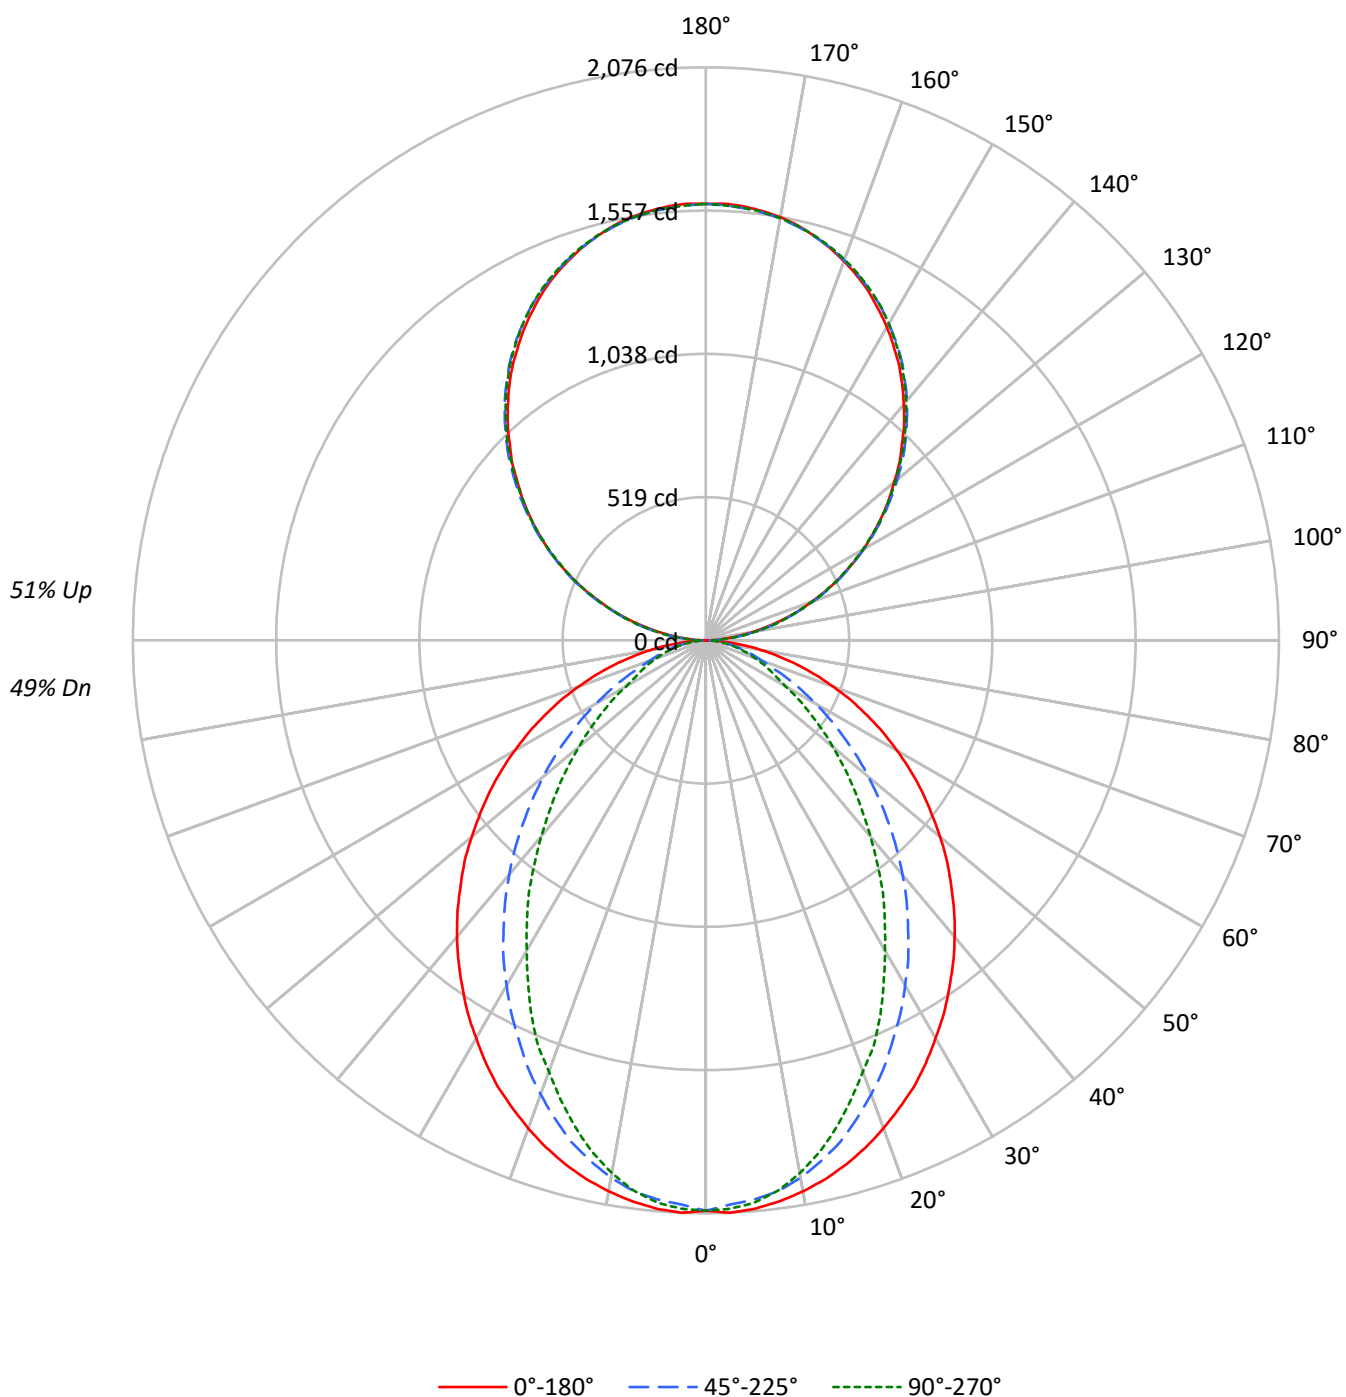

TEST NUMBER: P906382

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US835-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	107	107	107	107	99	99	99	99	83	83	83	68	68	68	55	55	55
1	98	94	90	87	90	87	84	81	73	71	69	61	59	58	50	49	48
2	90	83	77	72	82	76	71	67	65	61	58	54	51	49	44	42	41
3	82	73	66	60	75	68	61	57	58	53	49	48	45	42	40	37	35
4	75	65	57	51	69	60	54	48	51	46	42	43	40	36	36	33	31
5	69	58	50	44	64	54	47	42	46	41	37	39	35	32	32	29	27
6	64	52	44	39	59	49	42	37	42	36	32	35	31	28	30	26	24
7	59	47	40	34	55	44	37	32	38	33	29	32	28	25	27	24	22
8	55	43	36	30	51	40	33	29	35	29	26	30	26	23	25	22	20
9	51	39	32	27	47	37	30	26	32	27	23	27	23	20	23	20	18
10	48	36	29	24	44	34	28	23	30	24	21	25	21	19	22	18	16

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	2368	2368	2368
5°	2370	2329	2344
10°	2345	2281	2267
15°	2311	2205	2149
20°	2267	2099	2003
25°	2222	1981	1863
30°	2162	1861	1685
35°	2102	1731	1529
40°	2042	1597	1350
45°	1972	1448	1188
50°	1900	1299	1030
55°	1824	1139	878
60°	1736	972	722
65°	1635	803	649
70°	1512	645	586
75°	1358	565	532
80°	1135	469	458
85°	770	306	340

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 1972 cd/sqm

TEST NUMBER: P906382

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	193.7	2.2
10°-20°	531.7	6.1
20°-30°	746.5	8.6
30°-40°	813.7	9.4
40°-50°	747.9	8.6
50°-60°	587.3	6.8
60°-70°	382.3	4.4
70°-80°	196.8	2.3
80°-90°	54.7	0.6
90°-100°	97.8	1.1
100°-110°	310.9	3.6
110°-120°	532.1	6.1
120°-130°	699.7	8.1
130°-140°	785.4	9.1
140°-150°	770.2	8.9
150°-160°	646.1	7.4
160°-170°	428.5	4.9
170°-180°	149.8	1.7
0°-30°	1471.8	17.0
0°-40°	2285.5	26.3
0°-60°	3620.7	41.7
0°-90°	4254.5	49.0
90°-120°	940.8	10.8
90°-150°	3196.2	36.8
90°-180°	4421.0	51.0
0°-180°	8675.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	2066	2066	2066	2066	2066	
5°	2066	2057	2033	2050	2044	196
15°	1966	1945	1881	1846	1827	554
25°	1784	1724	1601	1524	1496	821
35°	1537	1442	1277	1160	1118	962
45°	1257	1131	935	802	757	971
55°	956	810	608	496	460	854
65°	645	494	325	262	256	640
75°	344	213	150	136	135	364
85°	80	41	36	36	36	92
90°	1	17	47	44	45	9
95°	70	83	85	85	83	77
105°	287	291	294	296	296	303
115°	534	542	539	538	534	528
125°	777	788	785	780	779	694
135°	1004	1019	1022	1021	1017	776
145°	1220	1229	1237	1238	1233	762
155°	1394	1398	1402	1409	1405	642
165°	1517	1516	1516	1525	1518	428
175°	1578	1575	1572	1581	1573	150
180°	1581	1581	1581	1581	1581	

TEST NUMBER: P906382

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	2066.5	2066.5	2066.5	2066.5	2066.5
2.5°	2075.8	2066.5	2045.9	2064.7	2060.9
5°	2066.5	2057.2	2032.8	2049.6	2044.1
7.5°	2049.6	2038.5	2012.3	2019.7	2010.3
10°	2027.2	2014.1	1976.8	1971.1	1959.9
12.5°	1999.2	1982.4	1931.8	1920.7	1900.0
15°	1965.5	1944.9	1881.4	1845.9	1827.2
17.5°	1926.2	1896.3	1817.7	1776.6	1746.6
20°	1881.4	1843.9	1750.4	1703.8	1662.5
22.5°	1832.8	1789.7	1681.2	1617.7	1589.7
25°	1784.1	1724.2	1600.8	1524.2	1496.0
27.5°	1726.2	1662.5	1526.0	1438.1	1395.1
30°	1664.5	1593.3	1443.7	1348.4	1297.8
32.5°	1604.6	1518.5	1365.3	1253.0	1206.2
35°	1537.3	1441.9	1277.4	1159.5	1118.3
37.5°	1471.8	1368.9	1195.1	1065.9	1019.3
40°	1402.6	1290.5	1108.9	976.2	927.6
42.5°	1331.6	1211.9	1023.0	884.5	837.9
45°	1256.8	1131.4	935.1	802.2	757.3
47.5°	1185.7	1053.0	851.0	718.1	677.0
50°	1107.2	974.4	768.7	639.5	600.4
52.5°	1030.4	890.1	690.1	566.7	531.2
55°	955.6	809.7	607.7	495.6	460.1
57.5°	879.0	729.4	534.9	430.2	400.2
60°	800.4	650.8	458.1	362.9	332.9
62.5°	723.8	574.2	392.7	303.0	288.1
65°	645.2	493.7	325.4	261.9	256.2
67.5°	570.4	418.9	261.9	230.0	224.4
70°	491.9	346.0	216.9	198.2	190.7
72.5°	417.1	278.6	181.4	166.5	162.7
75°	344.1	213.1	149.6	136.5	134.7
77.5°	271.2	151.4	117.9	110.3	106.5
80°	203.8	108.5	89.7	82.3	82.3
82.5°	142.1	73.0	61.7	57.9	57.9
85°	80.4	41.1	35.5	35.5	35.5
87.5°	30.0	14.9	14.9	13.1	13.1
90°	1.4	17.2	46.7	43.9	45.3
92.5°	29.6	40.0	41.5	42.9	42.9
95°	69.6	83.0	85.3	85.3	83.0
97.5°	115.8	128.2	133.5	133.5	133.5
100°	169.2	180.2	184.0	184.0	182.6
102.5°	225.5	233.6	238.8	240.3	238.8
105°	287.0	290.8	293.7	296.0	296.0
107.5°	348.0	353.7	353.7	354.7	348.0
110°	407.1	414.8	414.8	414.8	410.9

TEST NUMBER: P906382

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	471.0	479.1	477.7	473.9	471.0
115°	533.9	541.6	539.2	537.8	533.9
117.5°	596.4	606.9	600.2	596.4	592.6
120°	659.3	669.8	659.3	659.3	655.0
122.5°	716.5	729.9	723.2	719.4	716.5
125°	776.6	788.5	784.7	780.4	779.0
127.5°	835.2	850.0	844.8	839.0	835.2
130°	890.1	907.2	904.8	902.0	896.7
132.5°	951.6	964.9	965.9	959.2	955.4
135°	1004.5	1019.2	1022.1	1020.7	1016.9
137.5°	1063.6	1075.5	1077.9	1076.9	1071.2
140°	1115.5	1127.5	1134.1	1134.1	1128.9
142.5°	1168.9	1180.9	1184.7	1186.1	1180.9
145°	1219.5	1229.0	1236.6	1238.1	1232.8
147.5°	1264.8	1276.7	1282.4	1284.8	1279.5
150°	1311.5	1319.6	1324.8	1329.1	1324.8
152.5°	1353.0	1361.1	1367.7	1373.0	1367.7
155°	1394.4	1398.2	1402.5	1409.2	1404.9
157.5°	1430.2	1433.0	1435.4	1445.0	1438.3
160°	1462.1	1465.0	1466.4	1474.5	1468.8
162.5°	1491.7	1491.7	1493.1	1502.2	1495.5
165°	1517.0	1515.5	1515.5	1525.1	1518.4
167.5°	1539.8	1535.5	1535.5	1545.1	1538.4
170°	1557.0	1553.2	1551.8	1561.3	1553.2
172.5°	1568.9	1565.1	1563.7	1573.2	1565.1
175°	1578.5	1574.6	1571.8	1581.3	1573.2
177.5°	1583.7	1579.9	1577.0	1585.1	1577.0
180°	1581.3	1581.3	1581.3	1581.3	1581.3

TEST NUMBER: P906382

CATALOG NUMBER: DFN2DIP-SQ3F0-050D050US835-RLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	10.02	10.84	10.99	11.82	13.11	5.98	6.80	6.95	7.78	9.07
	3H	11.69	12.42	12.67	13.41	14.72	7.16	7.89	8.14	8.88	10.19
	4H	12.29	12.99	13.29	13.98	15.30	7.60	8.30	8.60	9.29	10.61
	6H	12.71	13.35	13.72	14.35	15.68	7.92	8.56	8.93	9.56	10.89
	8H	12.84	13.44	13.85	14.46	15.79	8.01	8.61	9.02	9.63	10.96
	12H	12.90	13.47	13.91	14.48	15.83	8.05	8.62	9.06	9.63	10.98
4H	2H	10.03	10.73	11.03	11.72	13.04	6.57	7.26	7.57	8.26	9.58
	3H	11.85	12.43	12.87	13.46	14.79	7.91	8.49	8.92	9.51	10.84
	4H	12.54	13.07	13.56	14.09	15.44	8.45	8.98	9.47	10.00	11.35
	6H	13.05	13.51	14.08	14.55	15.90	8.86	9.32	9.89	10.36	11.71
	8H	13.23	13.65	14.26	14.68	16.05	8.99	9.41	10.02	10.44	11.81
	12H	13.32	13.70	14.37	14.75	16.12	9.05	9.43	10.10	10.48	11.85
8H	4H	12.51	12.93	13.54	13.96	15.33	8.73	9.15	9.76	10.19	11.55
	6H	13.07	13.42	14.12	14.49	15.86	9.24	9.59	10.29	10.66	12.03
	8H	13.28	13.59	14.34	14.65	16.03	9.42	9.73	10.49	10.79	12.17
	12H	13.42	13.69	14.48	14.74	16.17	9.54	9.81	10.60	10.86	12.29
12H	4H	12.46	12.84	13.51	13.89	15.26	8.73	9.12	9.78	10.16	11.53
	6H	13.04	13.35	14.11	14.41	15.79	9.29	9.59	10.35	10.65	12.04
	8H	13.26	13.53	14.33	14.58	16.01	9.49	9.76	10.56	10.82	12.24