

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906438

Luminaire Tested: DFN2DIP-SQ3F0-060D100US835-RLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906438  
REPORT IS A COMBINATION OF REPORTS P899974 AND P896733  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-060D100US835-RLLFLL  
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 13950.0 lumens  
Efficiency: N/A  
Efficacy: 106.6 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: Semi-Indirect  
  
Input Watts (W): 130.9  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9971  
Total Harmonic Distortion (THDi): 0.049  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906438  
CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US835-RLFL

### Luminous Intensity Polar Plot

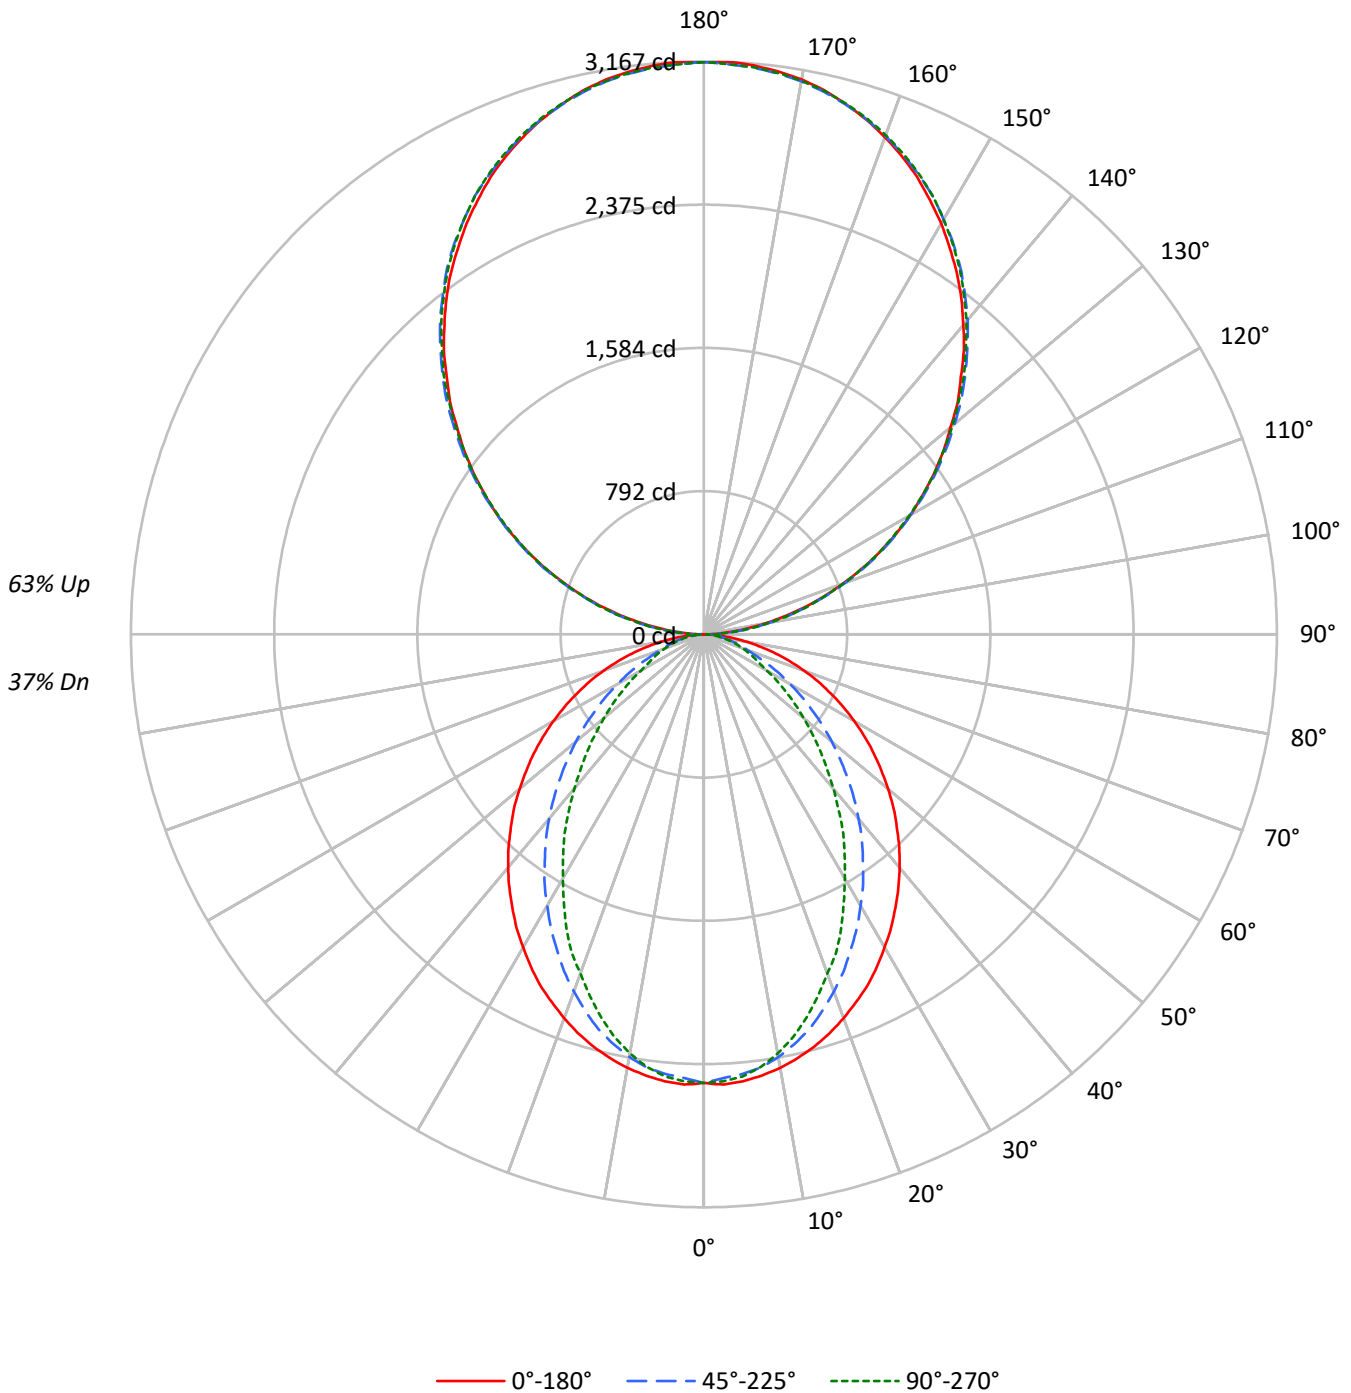



TEST NUMBER: P906438

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US835-RLFL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	104	104	104	104	94	94	94	94	76	76	76	59	59	59	44	44	44	37				37
1	95	91	87	84	86	83	80	77	67	65	63	53	51	50	39	38	38	32				32
2	87	80	74	69	79	73	68	63	59	56	53	47	44	42	35	34	32	27				27
3	79	70	64	58	72	64	58	53	52	48	45	41	39	36	31	29	28	23				23
4	73	63	55	49	66	57	51	46	47	42	38	37	34	31	28	26	24	20				20
5	67	56	48	42	60	51	44	39	42	37	33	33	30	27	26	23	21	18				18
6	62	50	42	37	56	46	39	34	38	33	29	30	27	24	23	21	19	16				16
7	57	45	38	32	52	41	35	30	34	29	26	28	24	21	21	19	17	14				14
8	53	41	34	29	48	38	31	27	31	26	23	25	22	19	20	17	15	13				13
9	49	38	30	25	45	34	28	24	29	24	20	23	20	17	18	16	14	12				12
10	46	34	27	23	42	32	25	21	26	22	18	22	18	16	17	14	13	11				11

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	2841	2841	2841
5°	2844	2794	2813
10°	2814	2738	2721
15°	2774	2645	2578
20°	2720	2519	2404
25°	2666	2377	2236
30°	2594	2233	2022
35°	2523	2077	1835
40°	2450	1916	1621
45°	2367	1738	1426
50°	2280	1559	1236
55°	2189	1367	1054
60°	2083	1167	867
65°	1962	963	779
70°	1815	774	703
75°	1630	678	638
80°	1361	563	550
85°	923	367	408

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 90°  
 Vertical Angle: 90°  
 Luminance: 3182 cd/sqm



TEST NUMBER: P906438

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US835-RLFL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	232.4	1.7
10°-20°	638.0	4.6
20°-30°	895.7	6.4
30°-40°	976.4	7.0
40°-50°	897.4	6.4
50°-60°	704.8	5.1
60°-70°	458.8	3.3
70°-80°	236.1	1.7
80°-90°	69.3	0.5
90°-100°	195.7	1.4
100°-110°	621.8	4.5
110°-120°	1064.1	7.6
120°-130°	1399.5	10.0
130°-140°	1570.9	11.3
140°-150°	1540.4	11.0
150°-160°	1292.2	9.3
160°-170°	856.9	6.1
170°-180°	299.5	2.1
0°-30°	1766.2	12.7
0°-40°	2742.6	19.7
0°-60°	4344.8	31.1
0°-90°	5109.0	36.6
90°-120°	1881.6	13.5
90°-150°	6392.4	45.8
90°-180°	8841.0	63.4
0°-180°	13950.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2480	2480	2480	2480	2480	
5°	2480	2469	2439	2460	2453	235
15°	2359	2334	2258	2215	2193	665
25°	2141	2069	1921	1829	1795	985
35°	1845	1730	1533	1391	1342	1155
45°	1508	1358	1122	963	909	1165
55°	1147	972	729	595	552	1025
65°	774	592	390	314	307	768
75°	413	256	180	164	162	437
85°	96	49	43	43	43	111
90°	3	34	93	88	91	14
95°	139	166	171	171	166	155
105°	574	582	587	592	592	606
115°	1068	1083	1078	1076	1068	1056
125°	1553	1577	1569	1561	1558	1388
135°	2009	2038	2044	2041	2034	1553
145°	2439	2458	2473	2476	2466	1524
155°	2789	2796	2805	2818	2810	1284
165°	3034	3031	3031	3050	3037	856
175°	3157	3149	3144	3163	3146	300
180°	3163	3163	3163	3163	3163	



TEST NUMBER: P906438

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US835-RLFL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2479.8	2479.8	2479.8	2479.8	2479.8
2.5°	2491.0	2479.8	2455.0	2477.6	2473.1
5°	2479.8	2468.6	2439.3	2459.6	2452.9
7.5°	2459.6	2446.2	2414.8	2423.6	2412.4
10°	2432.6	2416.9	2372.2	2365.3	2351.9
12.5°	2399.1	2378.8	2318.1	2304.8	2280.0
15°	2358.6	2333.8	2257.6	2215.0	2192.6
17.5°	2311.5	2275.5	2181.2	2131.9	2096.0
20°	2257.6	2212.6	2100.5	2044.5	1995.0
22.5°	2199.3	2147.6	2017.4	1941.2	1907.6
25°	2141.0	2069.1	1921.0	1829.1	1795.3
27.5°	2071.5	1995.0	1831.2	1725.7	1674.1
30°	1997.4	1911.9	1732.4	1618.1	1557.4
32.5°	1925.5	1822.2	1638.4	1503.6	1447.4
35°	1844.8	1730.3	1532.9	1391.4	1341.9
37.5°	1766.2	1642.6	1434.1	1279.1	1223.1
40°	1683.1	1548.6	1330.7	1171.4	1113.1
42.5°	1597.9	1454.3	1227.6	1061.4	1005.5
45°	1508.1	1357.6	1122.2	962.6	908.8
47.5°	1422.9	1263.6	1021.2	861.7	812.4
50°	1328.6	1169.3	922.4	767.4	720.5
52.5°	1236.4	1068.1	828.1	680.0	637.4
55°	1146.7	971.7	729.3	594.8	552.1
57.5°	1054.8	875.2	641.9	516.2	480.2
60°	960.5	781.0	549.8	435.5	399.5
62.5°	868.6	689.1	471.2	363.6	345.7
65°	774.3	592.4	390.5	314.3	307.4
67.5°	684.5	502.6	314.3	276.0	269.3
70°	590.2	415.2	260.2	237.9	228.8
72.5°	500.5	334.3	217.6	199.8	195.2
75°	412.9	255.7	179.5	163.8	161.7
77.5°	325.5	181.7	141.4	132.4	127.9
80°	244.5	130.2	107.6	98.8	98.8
82.5°	170.5	87.6	74.0	69.5	69.5
85°	96.4	49.3	42.6	42.6	42.6
87.5°	36.0	17.9	17.9	15.7	15.7
90°	2.9	34.3	93.4	87.7	90.6
92.5°	59.1	80.1	83.0	85.8	85.8
95°	139.2	165.9	170.7	170.7	165.9
97.5°	231.7	256.5	267.0	267.0	267.0
100°	338.5	360.4	368.0	368.0	365.2
102.5°	451.0	467.2	477.7	480.5	477.7
105°	574.0	581.6	587.3	592.1	592.1
107.5°	696.0	707.5	707.5	709.4	696.0
110°	814.3	829.5	829.5	829.5	821.9



TEST NUMBER: P906438

CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US835-RLFL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	942.0	958.2	955.4	947.7	942.0
115°	1067.9	1083.1	1078.4	1075.5	1067.9
117.5°	1192.8	1213.8	1200.4	1192.8	1185.1
120°	1318.6	1339.6	1318.6	1318.6	1310.1
122.5°	1433.0	1459.7	1446.4	1438.8	1433.0
125°	1553.2	1577.0	1569.4	1560.8	1558.0
127.5°	1670.5	1700.0	1689.5	1678.1	1670.5
130°	1780.1	1814.4	1809.7	1803.9	1793.5
132.5°	1903.1	1929.8	1931.7	1918.4	1910.7
135°	2008.9	2038.5	2044.2	2041.4	2033.7
137.5°	2127.2	2151.0	2155.8	2153.9	2142.4
140°	2231.1	2254.9	2268.3	2268.3	2257.8
142.5°	2337.9	2361.7	2369.3	2372.2	2361.7
145°	2438.9	2458.0	2473.3	2476.1	2465.6
147.5°	2529.5	2553.4	2564.8	2569.6	2559.1
150°	2623.0	2639.2	2649.7	2658.2	2649.7
152.5°	2705.9	2722.1	2735.5	2746.0	2735.5
155°	2788.9	2796.5	2805.1	2818.4	2809.8
157.5°	2860.4	2866.1	2870.9	2889.9	2876.6
160°	2924.3	2930.0	2932.8	2949.0	2937.6
162.5°	2983.4	2983.4	2986.2	3004.3	2991.0
165°	3033.9	3031.0	3031.0	3050.1	3036.8
167.5°	3079.7	3071.1	3071.1	3090.2	3076.8
170°	3114.0	3106.4	3103.5	3122.6	3106.4
172.5°	3137.8	3130.2	3127.3	3146.4	3130.2
175°	3156.9	3149.3	3143.6	3162.6	3146.4
177.5°	3167.4	3159.8	3154.0	3170.2	3154.0
180°	3162.6	3162.6	3162.6	3162.6	3162.6



TEST NUMBER: P906438  
 CATALOG NUMBER: DFN2DIP-SQ3F0-060D100US835-RLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	9.34	10.08	10.41	11.14	12.60	5.31	6.04	6.38	7.11	8.56
	3H	11.01	11.66	12.09	12.74	14.21	6.48	7.13	7.56	8.21	9.68
	4H	11.61	12.23	12.70	13.31	14.79	6.92	7.54	8.01	8.62	10.10
	6H	12.02	12.59	13.12	13.68	15.16	7.23	7.80	8.33	8.88	10.37
	8H	12.15	12.69	13.25	13.79	15.27	7.32	7.86	8.42	8.96	10.44
	12H	12.20	12.72	13.31	13.81	15.31	7.35	7.87	8.46	8.96	10.47
4H	2H	9.35	9.97	10.45	11.05	12.52	5.89	6.51	6.98	7.58	9.06
	3H	11.16	11.68	12.27	12.78	14.27	7.22	7.74	8.32	8.84	10.33
	4H	11.85	12.32	12.96	13.42	14.93	7.76	8.23	8.87	9.33	10.84
	6H	12.35	12.76	13.47	13.88	15.38	8.17	8.57	9.28	9.69	11.19
	8H	12.52	12.90	13.64	14.01	15.53	8.29	8.67	9.40	9.78	11.30
	12H	12.61	12.95	13.74	14.08	15.60	8.35	8.69	9.48	9.81	11.33
8H	4H	11.81	12.19	12.92	13.30	14.81	8.03	8.41	9.14	9.52	11.04
	6H	12.36	12.68	13.50	13.83	15.34	8.54	8.85	9.67	10.00	11.52
	8H	12.58	12.85	13.72	13.98	15.52	8.72	8.99	9.86	10.13	11.66
	12H	12.71	12.95	13.85	14.08	15.65	8.83	9.07	9.98	10.20	11.77
12H	4H	11.75	12.10	12.89	13.22	14.74	8.03	8.37	9.16	9.49	11.02
	6H	12.34	12.61	13.48	13.74	15.28	8.58	8.86	9.73	9.99	11.52
	8H	12.55	12.79	13.70	13.92	15.49	8.78	9.02	9.93	10.15	11.72