

Cooper Lighting Solutions Photometric Lab  
1121 Highway 74 South  
Peachtree City, GA 30269



Scaled data based on original data using  
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-  
State Lighting Products

Test Report Prepared for  
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906460

Luminaire Tested: DFN2DIP-SQ3F0-070D070US835-FLLFLL

Issue Date: 11/21/2024

**Test Information**


Test Method: LM-79-2019  
Report Number: P906460  
REPORT IS A COMBINATION OF REPORTS P899921 AND P896733  
Test Lab: INNOVATION CENTER  
Issue Date: 11/21/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS  
Product Line: NEO-RAY  
Catalog Number: DFN2DIP-SQ3F0-070D070US835-FLLFL  
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 13125.1 lumens  
Efficiency: N/A  
Efficacy: 111.1 lumens/watt  
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29  
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')  
CIE Type: General Diffuse  
  
Input Watts (W): 118.1  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: 0.9963  
Total Harmonic Distortion (THDi): 0.065  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 24 FT

TEST NUMBER: P906460  
CATALOG NUMBER: DFN2DIP-SQ3F0-070D070US835-FLLFLL

### Luminous Intensity Polar Plot

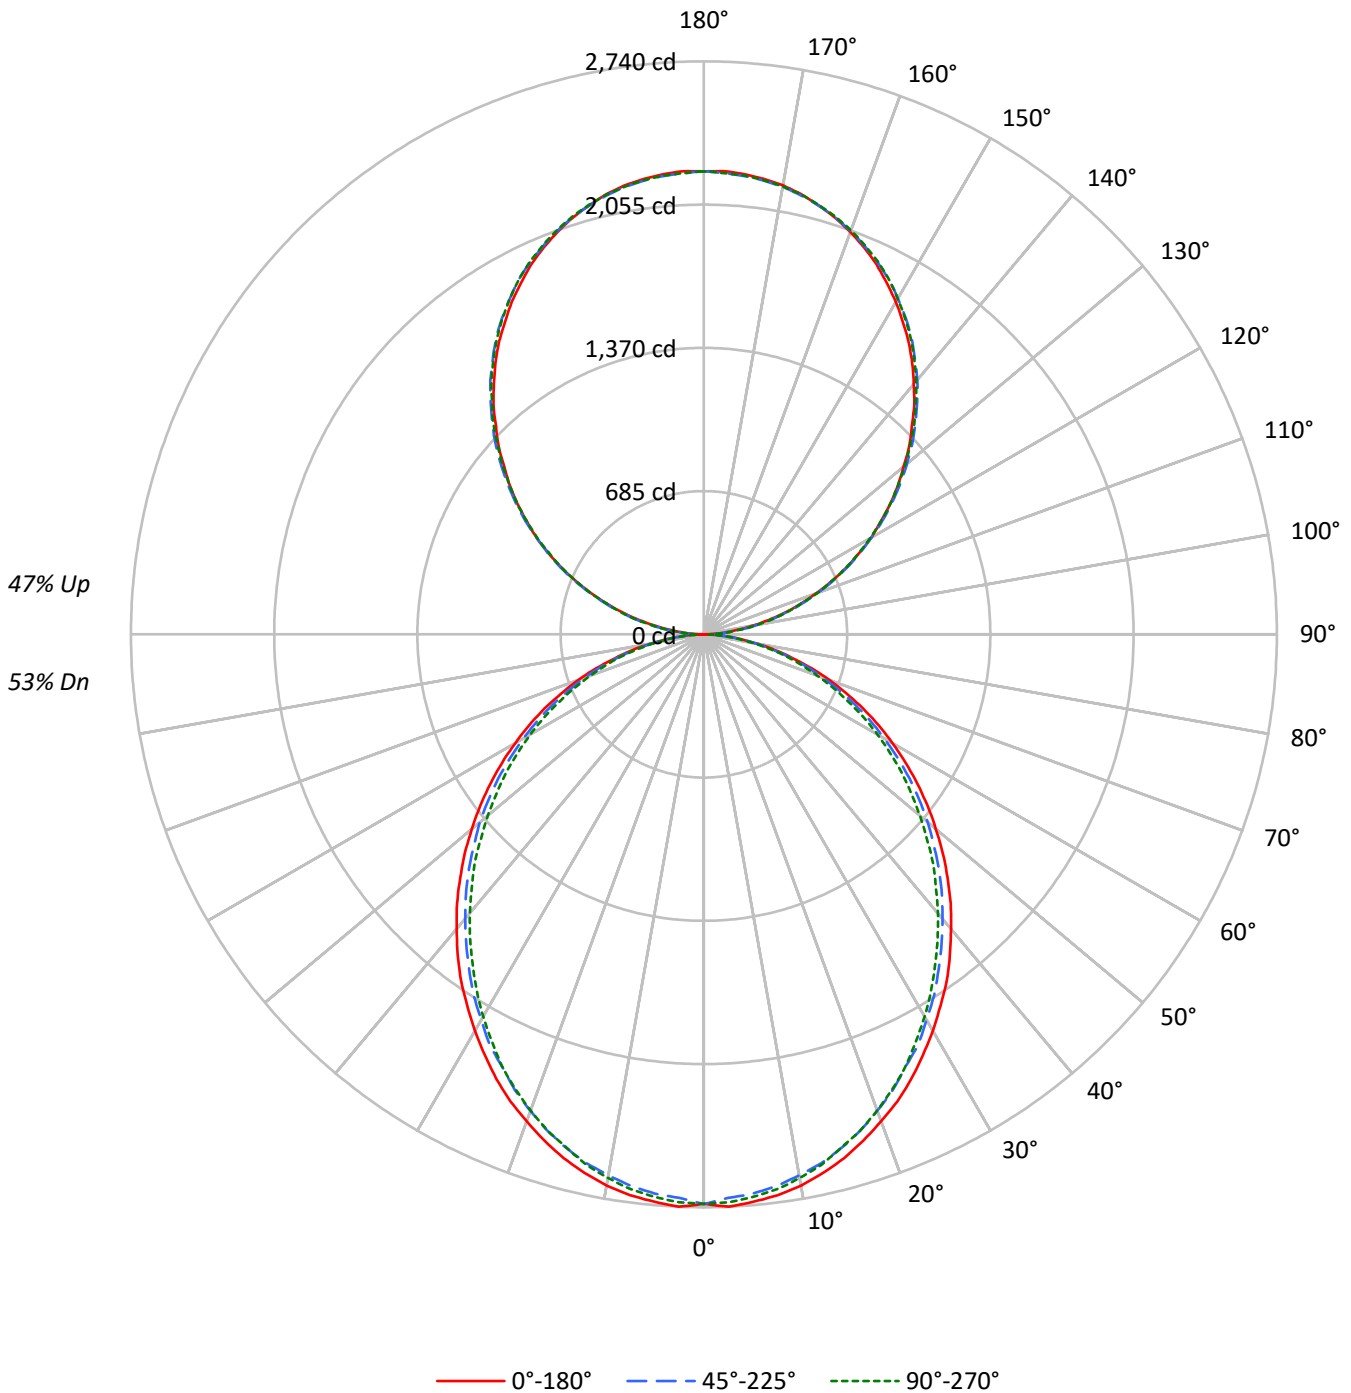



TEST NUMBER: P906460  
 CATALOG NUMBER: DFN2DIP-SQ3F0-070D070US835-FLLFLL

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	108	108	108	108	100	100	100	100	85	85	85	71	71	71	59	59	59	59	59	59	53
1	98	94	90	87	91	87	84	81	74	72	70	63	61	59	52	51	50	52	51	50	45
2	90	82	76	71	83	76	71	66	65	61	58	55	52	50	46	44	42	46	44	42	37
3	82	72	65	59	75	67	61	55	58	53	49	49	45	42	41	38	36	41	38	36	32
4	75	64	56	50	69	60	52	47	51	46	41	43	39	36	36	33	31	36	33	31	27
5	69	57	49	43	63	53	46	40	46	40	36	39	35	31	33	29	27	33	29	27	24
6	63	51	43	37	58	48	40	35	41	36	31	35	31	27	30	26	24	30	26	24	21
7	59	46	38	33	54	43	36	31	37	32	28	32	28	24	27	24	21	27	24	21	18
8	54	42	34	29	50	39	32	27	34	29	24	29	25	22	25	21	19	25	21	19	16
9	51	38	31	26	47	36	29	24	31	26	22	27	23	19	23	20	17	23	20	17	15
10	47	35	28	23	44	33	26	22	29	23	20	25	21	18	21	18	15	21	18	15	13

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	3121	3121	3121
5°	3124	3075	3097
10°	3097	3032	3054
15°	3049	2980	2988
20°	2985	2908	2920
25°	2922	2824	2841
30°	2844	2744	2741
35°	2769	2651	2636
40°	2677	2557	2536
45°	2585	2462	2433
50°	2485	2363	2314
55°	2380	2248	2205
60°	2261	2112	2079
65°	2131	1971	1931
70°	1965	1798	1772
75°	1736	1592	1623
80°	1459	1328	1341
85°	1027	881	878

**MAXIMUM LUMINANCE 45°-90°:**

Horizontal Angle: 0°  
 Vertical Angle: 45°  
 Luminance: 2585 cd/sqm



TEST NUMBER: P906460

CATALOG NUMBER: DFN2DIP-SQ3F0-070D070US835-FLLFLL

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	256.4	2.0
10°-20°	721.3	5.5
20°-30°	1060.0	8.1
30°-40°	1231.1	9.4
40°-50°	1229.6	9.4
50°-60°	1072.2	8.2
60°-70°	792.6	6.0
70°-80°	448.4	3.4
80°-90°	124.7	0.9
90°-100°	137.0	1.0
100°-110°	435.3	3.3
110°-120°	744.9	5.7
120°-130°	979.6	7.5
130°-140°	1099.6	8.4
140°-150°	1078.3	8.2
150°-160°	904.5	6.9
160°-170°	599.9	4.6
170°-180°	209.7	1.6
0°-30°	2037.7	15.5
0°-40°	3268.8	24.9
0°-60°	5570.6	42.4
0°-90°	6936.3	52.8
90°-120°	1317.2	10.0
90°-150°	4474.7	34.1
90°-180°	6189.0	47.2
0°-180°	13125.1	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	2724	2724	2724	2724	2724	
5°	2724	2714	2685	2705	2700	259
15°	2593	2577	2543	2554	2541	730
25°	2347	2326	2281	2286	2281	1080
35°	2025	1998	1956	1941	1928	1264
45°	1648	1629	1590	1561	1550	1271
55°	1247	1231	1200	1168	1155	1115
65°	841	825	799	775	762	831
75°	440	435	422	406	411	470
85°	107	105	102	94	92	120
90°	2	24	65	61	63	13
95°	97	116	120	120	116	108
105°	402	407	411	414	414	424
115°	748	758	755	753	748	739
125°	1087	1104	1099	1093	1091	972
135°	1406	1427	1431	1429	1424	1087
145°	1707	1721	1731	1733	1726	1067
155°	1952	1958	1964	1973	1967	899
165°	2124	2122	2122	2135	2126	599
175°	2210	2204	2200	2214	2202	210
180°	2214	2214	2214	2214	2214	



TEST NUMBER: P906460

CATALOG NUMBER: DFN2DIP-SQ3F0-070D070US835-FLLFLL

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	2723.7	2723.7	2723.7	2723.7	2723.7
2.5°	2739.6	2726.5	2697.6	2723.7	2718.7
5°	2723.7	2713.5	2684.6	2705.4	2700.4
7.5°	2705.4	2689.8	2660.9	2682.1	2676.8
10°	2676.8	2658.4	2627.0	2647.9	2640.1
12.5°	2637.3	2621.8	2590.4	2603.4	2598.1
15°	2592.9	2577.3	2543.1	2553.7	2540.6
17.5°	2537.8	2522.3	2488.1	2501.2	2488.1
20°	2477.5	2462.0	2425.3	2433.1	2422.8
22.5°	2417.5	2393.9	2359.7	2359.7	2354.4
25°	2346.7	2325.8	2281.4	2286.4	2281.4
27.5°	2268.0	2249.7	2215.8	2208.0	2194.9
30°	2189.7	2168.5	2129.4	2121.6	2111.0
32.5°	2105.7	2090.2	2048.2	2032.4	2021.8
35°	2024.6	1998.5	1956.5	1940.7	1927.6
37.5°	1932.9	1909.3	1867.3	1849.0	1835.9
40°	1838.7	1817.6	1775.6	1752.3	1741.7
42.5°	1747.0	1725.9	1684.2	1657.8	1642.2
45°	1647.5	1629.2	1589.7	1561.1	1550.5
47.5°	1550.5	1532.2	1490.2	1461.3	1445.8
50°	1448.3	1435.2	1398.5	1361.9	1348.8
52.5°	1348.8	1330.5	1296.6	1267.7	1249.3
55°	1246.8	1231.0	1199.6	1168.2	1155.1
57.5°	1144.6	1131.5	1097.3	1065.9	1055.4
60°	1042.3	1032.0	995.4	966.5	958.7
62.5°	942.8	924.5	898.4	872.3	861.7
65°	840.9	825.0	798.9	775.3	762.2
67.5°	736.1	722.8	699.4	681.1	670.5
70°	639.1	628.6	604.9	586.6	576.3
72.5°	539.6	529.1	516.0	497.7	489.9
75°	439.9	434.9	421.5	406.0	411.3
77.5°	351.0	340.4	335.1	327.3	319.6
80°	262.0	259.3	254.0	246.2	240.9
82.5°	178.1	178.1	175.6	165.1	165.1
85°	107.3	104.8	102.3	94.2	91.7
87.5°	47.2	42.0	36.7	28.9	26.1
90°	2.0	24.0	65.4	61.4	63.4
92.5°	41.4	56.1	58.1	60.1	60.1
95°	97.4	116.1	119.5	119.5	116.1
97.5°	162.2	179.5	186.9	186.9	186.9
100°	236.9	252.3	257.6	257.6	255.6
102.5°	315.7	327.0	334.4	336.4	334.4
105°	401.8	407.1	411.1	414.5	414.5
107.5°	487.2	495.2	495.2	496.6	487.2
110°	570.0	580.7	580.7	580.7	575.3



TEST NUMBER: P906460

CATALOG NUMBER: DFN2DIP-SQ3F0-070D070US835-FLLFLL

**CANDELA DISTRIBUTION (continued):**

	0°	22.5°	45°	67.5°	90°
112.5°	659.4	670.8	668.8	663.4	659.4
115°	747.5	758.2	754.9	752.9	747.5
117.5°	834.9	849.6	840.3	834.9	829.6
120°	923.0	937.7	923.0	923.0	917.0
122.5°	1003.1	1021.8	1012.5	1007.1	1003.1
125°	1087.2	1103.9	1098.6	1092.6	1090.6
127.5°	1169.3	1190.0	1182.7	1174.7	1169.3
130°	1246.1	1270.1	1266.8	1262.8	1255.4
132.5°	1332.2	1350.9	1352.2	1342.9	1337.5
135°	1406.3	1426.9	1431.0	1428.9	1423.6
137.5°	1489.0	1505.7	1509.0	1507.7	1499.7
140°	1561.8	1578.5	1587.8	1587.8	1580.5
142.5°	1636.5	1653.2	1658.5	1660.5	1653.2
145°	1707.3	1720.6	1731.3	1733.3	1726.0
147.5°	1770.7	1787.4	1795.4	1798.7	1791.4
150°	1836.1	1847.4	1854.8	1860.8	1854.8
152.5°	1894.1	1905.5	1914.8	1922.2	1914.8
155°	1952.2	1957.5	1963.6	1972.9	1966.9
157.5°	2002.3	2006.3	2009.6	2023.0	2013.6
160°	2047.0	2051.0	2053.0	2064.3	2056.3
162.5°	2088.4	2088.4	2090.4	2103.0	2093.7
165°	2123.7	2121.7	2121.7	2135.1	2125.7
167.5°	2155.8	2149.8	2149.8	2163.1	2153.8
170°	2179.8	2174.5	2172.5	2185.8	2174.5
172.5°	2196.5	2191.1	2189.1	2202.5	2191.1
175°	2209.8	2204.5	2200.5	2213.8	2202.5
177.5°	2217.2	2211.8	2207.8	2219.2	2207.8
180°	2213.8	2213.8	2213.8	2213.8	2213.8



TEST NUMBER: P906460  
 CATALOG NUMBER: DFN2DIP-SQ3F0-070D070US835-FLLFLL

**CIE UGR TABLE:**

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.45	12.34	12.38	13.29	14.52	11.01	11.89	11.94	12.84	14.07
	3H	13.11	13.90	14.05	14.86	16.12	12.62	13.41	13.56	14.37	15.63
	4H	13.69	14.45	14.65	15.41	16.67	13.20	13.95	14.16	14.92	16.18
	6H	14.09	14.79	15.06	15.76	17.03	13.59	14.29	14.56	15.25	16.53
	8H	14.20	14.86	15.17	15.84	17.12	13.69	14.35	14.67	15.34	16.61
	12H	14.24	14.87	15.22	15.85	17.15	13.73	14.36	14.72	15.34	16.64
4H	2H	11.91	12.66	12.87	13.63	14.89	11.56	12.31	12.52	13.27	14.53
	3H	13.77	14.40	14.75	15.40	16.67	13.37	13.99	14.34	14.99	16.26
	4H	14.49	15.06	15.47	16.05	17.35	14.06	14.64	15.04	15.62	16.92
	6H	15.00	15.49	15.99	16.50	17.80	14.57	15.06	15.56	16.07	17.37
	8H	15.15	15.61	16.14	16.61	17.92	14.71	15.17	15.70	16.17	17.49
	12H	15.22	15.64	16.23	16.66	17.97	14.77	15.19	15.78	16.21	17.52
8H	4H	14.68	15.14	15.68	16.15	17.46	14.30	14.77	15.30	15.77	17.08
	6H	15.31	15.69	16.33	16.73	18.05	14.92	15.30	15.94	16.35	17.66
	8H	15.52	15.86	16.55	16.89	18.22	15.13	15.47	16.16	16.50	17.83
	12H	15.65	15.95	16.69	16.98	18.35	15.24	15.54	16.28	16.57	17.94
12H	4H	14.67	15.08	15.68	16.10	17.42	14.30	14.72	15.31	15.73	17.05
	6H	15.33	15.67	16.36	16.70	18.03	14.96	15.30	15.99	16.33	17.66
	8H	15.57	15.87	16.61	16.90	18.27	15.19	15.49	16.23	16.52	17.89