

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906554

Luminaire Tested: DFN2DIP-SQ3F0-090D120US835-RLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906554
REPORT IS A COMBINATION OF REPORTS P900016 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-090D120US835-RLFL
Description: 3 foot, Square Define Geo, with Direct 1in Regressed Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 18270.0 lumens
Efficiency: N/A
Efficacy: 100.4 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 0.99 / 1.16
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: General Diffuse

Input Watts (W): 181.9
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.996
Total Harmonic Distortion (THDi): 0.064
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906554

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US835-RLLFLL

Luminous Intensity Polar Plot

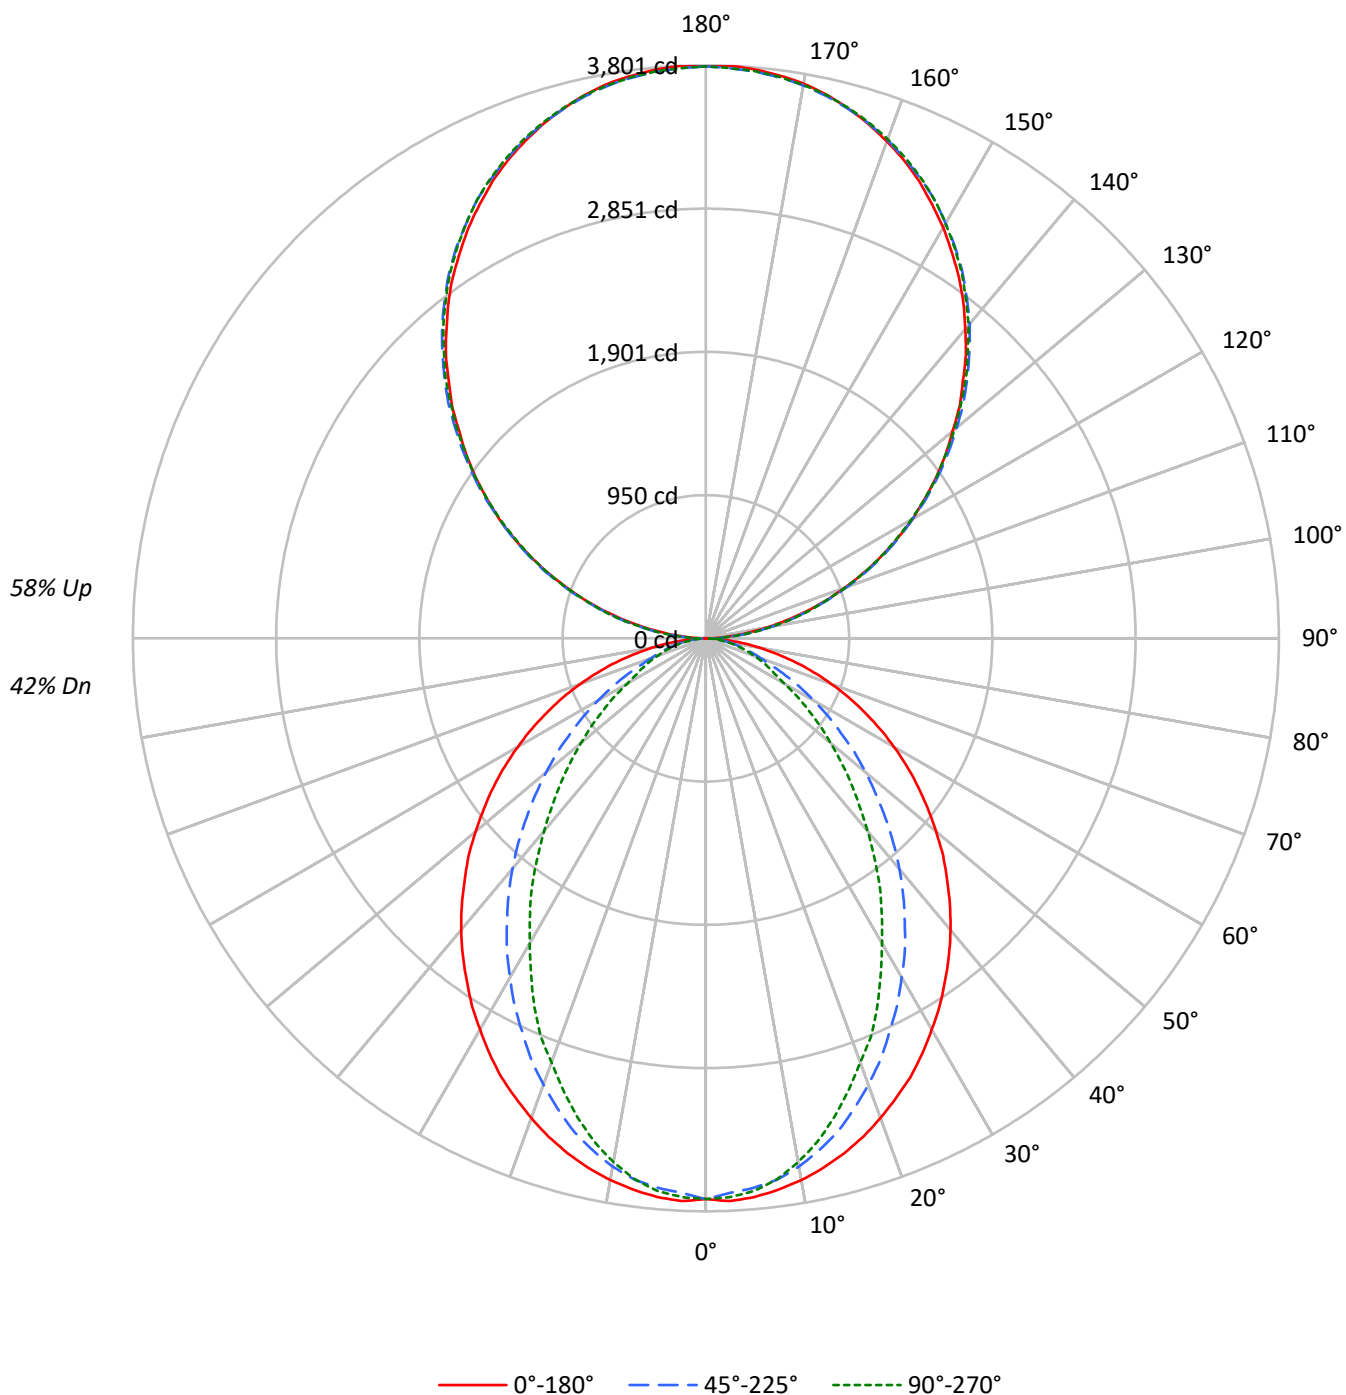

TEST NUMBER: P906554

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US835-RLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10
RCR																	
0	105	105	105	105	96	96	96	96	79	79	79	63	63	63	49	49	49
1	96	92	89	85	88	84	81	78	70	67	65	56	55	53	44	43	42
2	88	81	75	70	80	74	69	65	61	58	55	50	47	45	39	37	36
3	81	72	65	59	73	66	60	55	55	50	47	44	41	39	35	33	31
4	74	64	56	50	67	58	52	47	49	44	40	40	36	33	31	29	27
5	68	57	49	43	62	52	45	40	44	39	35	36	32	29	28	26	24
6	63	51	43	38	57	47	40	35	40	34	30	33	29	26	26	23	21
7	58	46	38	33	53	43	36	31	36	31	27	30	26	23	24	21	19
8	54	42	34	29	49	39	32	28	33	28	24	27	23	21	22	19	17
9	50	38	31	26	46	36	29	25	30	25	22	25	21	19	20	18	16
10	47	35	28	24	43	33	26	22	28	23	19	23	19	17	19	16	14

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4262	4262	4262
5°	4266	4192	4220
10°	4221	4107	4081
15°	4160	3968	3868
20°	4081	3778	3606
25°	3999	3566	3353
30°	3891	3349	3034
35°	3784	3116	2753
40°	3676	2874	2431
45°	3550	2607	2139
50°	3419	2338	1854
55°	3283	2050	1581
60°	3125	1750	1300
65°	2943	1445	1168
70°	2722	1161	1055
75°	2444	1017	957
80°	2042	844	825
85°	1385	550	612

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 90°

Vertical Angle: 90°

Luminance: 3817 cd/sqm

TEST NUMBER: P906554

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US835-RLFL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	348.6	1.9
10°-20°	957.0	5.2
20°-30°	1343.6	7.4
30°-40°	1464.6	8.0
40°-50°	1346.2	7.4
50°-60°	1057.2	5.8
60°-70°	688.1	3.8
70°-80°	354.2	1.9
80°-90°	101.2	0.6
90°-100°	234.8	1.3
100°-110°	746.2	4.1
110°-120°	1276.9	7.0
120°-130°	1679.4	9.2
130°-140°	1885.0	10.3
140°-150°	1848.5	10.1
150°-160°	1550.6	8.5
160°-170°	1028.3	5.6
170°-180°	359.4	2.0
0°-30°	2649.2	14.5
0°-40°	4113.9	22.5
0°-60°	6517.2	35.7
0°-90°	7660.8	41.9
90°-120°	2257.9	12.4
90°-150°	7670.8	42.0
90°-180°	10609.0	58.1
0°-180°	18270.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3720	3720	3720	3720	3720	
5°	3720	3703	3659	3689	3679	353
15°	3538	3501	3386	3322	3289	997
25°	3212	3104	2882	2744	2693	1477
35°	2767	2595	2299	2087	2013	1732
45°	2262	2036	1683	1444	1363	1747
55°	1720	1458	1094	892	828	1537
65°	1161	889	586	471	461	1151
75°	619	384	269	246	242	655
85°	145	74	64	64	64	166
90°	3	41	112	105	109	18
95°	167	199	205	205	199	186
105°	689	698	705	710	710	727
115°	1281	1300	1294	1291	1281	1267
125°	1864	1892	1883	1873	1870	1666
135°	2411	2446	2453	2450	2440	1863
145°	2927	2950	2968	2971	2959	1829
155°	3347	3356	3366	3382	3372	1540
165°	3641	3637	3637	3660	3644	1027
175°	3788	3779	3772	3795	3776	360
180°	3795	3795	3795	3795	3795	

TEST NUMBER: P906554

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US835-RLFL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3719.7	3719.7	3719.7	3719.7	3719.7
2.5°	3736.5	3719.7	3682.5	3716.5	3709.7
5°	3719.7	3702.9	3659.0	3689.3	3679.3
7.5°	3689.3	3669.3	3622.2	3635.4	3618.6
10°	3649.0	3625.4	3558.3	3547.9	3527.9
12.5°	3598.6	3568.3	3477.2	3457.2	3420.0
15°	3537.9	3500.8	3386.5	3322.5	3289.0
17.5°	3467.2	3413.3	3271.8	3197.9	3144.0
20°	3386.5	3319.0	3150.7	3066.8	2992.5
22.5°	3299.0	3221.5	3026.1	2911.8	2861.5
25°	3211.5	3103.6	2881.5	2743.6	2692.9
27.5°	3107.2	2992.5	2746.8	2588.6	2511.1
30°	2996.1	2867.9	2598.6	2427.2	2336.1
32.5°	2888.2	2733.2	2457.5	2255.4	2171.1
35°	2767.2	2595.4	2299.3	2087.2	2012.9
37.5°	2649.3	2464.0	2151.1	1918.6	1834.7
40°	2524.7	2322.9	1996.1	1757.2	1669.7
42.5°	2396.8	2181.5	1841.4	1592.2	1508.2
45°	2262.2	2036.5	1683.2	1443.9	1363.2
47.5°	2134.3	1895.4	1531.8	1292.5	1218.6
50°	1992.9	1753.9	1383.6	1151.1	1080.7
52.5°	1854.7	1602.2	1242.2	1020.0	956.1
55°	1720.0	1457.5	1093.9	892.2	828.2
57.5°	1582.2	1312.9	962.9	774.3	720.4
60°	1440.7	1171.4	824.7	653.2	599.3
62.5°	1302.9	1033.6	706.8	545.4	518.6
65°	1161.4	888.6	585.7	471.4	461.1
67.5°	1026.8	753.9	471.4	413.9	403.9
70°	885.4	622.9	390.4	356.8	343.2
72.5°	750.7	501.4	326.4	299.6	292.9
75°	619.3	383.6	269.3	245.7	242.5
77.5°	488.2	272.5	212.1	198.6	191.8
80°	366.8	195.4	161.4	148.2	148.2
82.5°	255.7	131.4	111.1	104.3	104.3
85°	144.6	73.9	63.9	63.9	63.9
87.5°	53.9	26.8	26.8	23.6	23.6
90°	3.4	41.2	112.1	105.3	108.7
92.5°	70.9	96.1	99.5	103.0	103.0
95°	167.0	199.1	204.8	204.8	199.1
97.5°	278.0	307.8	320.4	320.4	320.4
100°	406.2	432.5	441.6	441.6	438.2
102.5°	541.2	560.6	573.2	576.7	573.2
105°	688.8	697.9	704.8	710.5	710.5
107.5°	835.2	849.0	849.0	851.2	835.2
110°	977.1	995.4	995.4	995.4	986.3

TEST NUMBER: P906554

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US835-RLFL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	1130.4	1149.9	1146.4	1137.3	1130.4
115°	1281.4	1299.8	1294.0	1290.6	1281.4
117.5°	1431.3	1456.5	1440.5	1431.3	1422.2
120°	1582.4	1607.5	1582.4	1582.4	1572.1
122.5°	1719.7	1751.7	1735.7	1726.5	1719.7
125°	1863.8	1892.4	1883.3	1873.0	1869.5
127.5°	2004.6	2040.0	2027.4	2013.7	2004.6
130°	2136.1	2177.3	2171.6	2164.7	2152.1
132.5°	2283.7	2315.8	2318.0	2302.0	2292.9
135°	2410.7	2446.2	2453.1	2449.6	2440.5
137.5°	2552.6	2581.2	2586.9	2584.6	2570.9
140°	2677.3	2705.9	2721.9	2721.9	2709.3
142.5°	2805.5	2834.1	2843.2	2846.6	2834.1
145°	2926.7	2949.6	2967.9	2971.4	2958.8
147.5°	3035.4	3064.0	3077.8	3083.5	3070.9
150°	3147.6	3167.0	3179.6	3189.9	3179.6
152.5°	3247.1	3266.5	3282.6	3295.2	3282.6
155°	3346.6	3355.8	3366.1	3382.1	3371.8
157.5°	3432.5	3439.3	3445.0	3467.9	3451.9
160°	3509.1	3516.0	3519.4	3538.9	3525.1
162.5°	3580.0	3580.0	3583.5	3605.2	3589.2
165°	3640.7	3637.3	3637.3	3660.1	3644.1
167.5°	3695.6	3685.3	3685.3	3708.2	3692.2
170°	3736.8	3727.6	3724.2	3747.1	3727.6
172.5°	3765.4	3756.2	3752.8	3775.7	3756.2
175°	3788.3	3779.1	3772.3	3795.1	3775.7
177.5°	3800.9	3791.7	3784.8	3804.3	3784.8
180°	3795.1	3795.1	3795.1	3795.1	3795.1

TEST NUMBER: P906554

CATALOG NUMBER: DFN2DIP-SQ3F0-090D120US835-RLFL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	11.35	12.11	12.37	13.15	14.53	7.31	8.07	8.34	9.11	10.49
	3H	13.01	13.70	14.05	14.74	16.15	8.48	9.17	9.52	10.21	11.62
	4H	13.62	14.27	14.67	15.31	16.72	8.93	9.58	9.98	10.62	12.03
	6H	14.03	14.63	15.09	15.68	17.10	9.24	9.84	10.30	10.88	12.31
	8H	14.15	14.72	15.22	15.79	17.20	9.32	9.89	10.39	10.96	12.38
	12H	14.21	14.75	15.28	15.81	17.25	9.36	9.90	10.43	10.96	12.40
4H	2H	11.35	12.00	12.41	13.05	14.46	7.89	8.54	8.95	9.59	11.00
	3H	13.17	13.71	14.24	14.79	16.21	9.23	9.77	10.29	10.84	12.27
	4H	13.86	14.35	14.93	15.42	16.86	9.77	10.26	10.84	11.33	12.77
	6H	14.37	14.79	15.45	15.88	17.32	10.18	10.60	11.26	11.69	13.13
	8H	14.54	14.93	15.62	16.01	17.47	10.30	10.70	11.38	11.78	13.23
	12H	14.63	14.98	15.72	16.08	17.54	10.36	10.72	11.46	11.81	13.27
8H	4H	13.82	14.22	14.90	15.29	16.75	10.04	10.44	11.12	11.52	12.97
	6H	14.38	14.71	15.48	15.83	17.28	10.55	10.88	11.65	12.00	13.45
	8H	14.59	14.88	15.70	15.98	17.45	10.73	11.02	11.84	12.12	13.60
	12H	14.72	14.98	15.84	16.07	17.59	10.85	11.10	11.96	12.20	13.71
12H	4H	13.77	14.13	14.87	15.22	16.68	10.04	10.40	11.14	11.49	12.95
	6H	14.35	14.64	15.46	15.74	17.22	10.60	10.88	11.71	11.99	13.46
	8H	14.57	14.82	15.68	15.92	17.43	10.80	11.05	11.91	12.15	13.66