

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906556

Luminaire Tested: DFN2DIP-SQ3F0-100D040US835-FLLFLL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906556
REPORT IS A COMBINATION OF REPORTS P899873 AND P896733
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D040US835-FLLFLL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Frosted Lens
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 13440.0 lumens
Efficiency: N/A
Efficacy: 104.3 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 128.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906556

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLFLL

Luminous Intensity Polar Plot

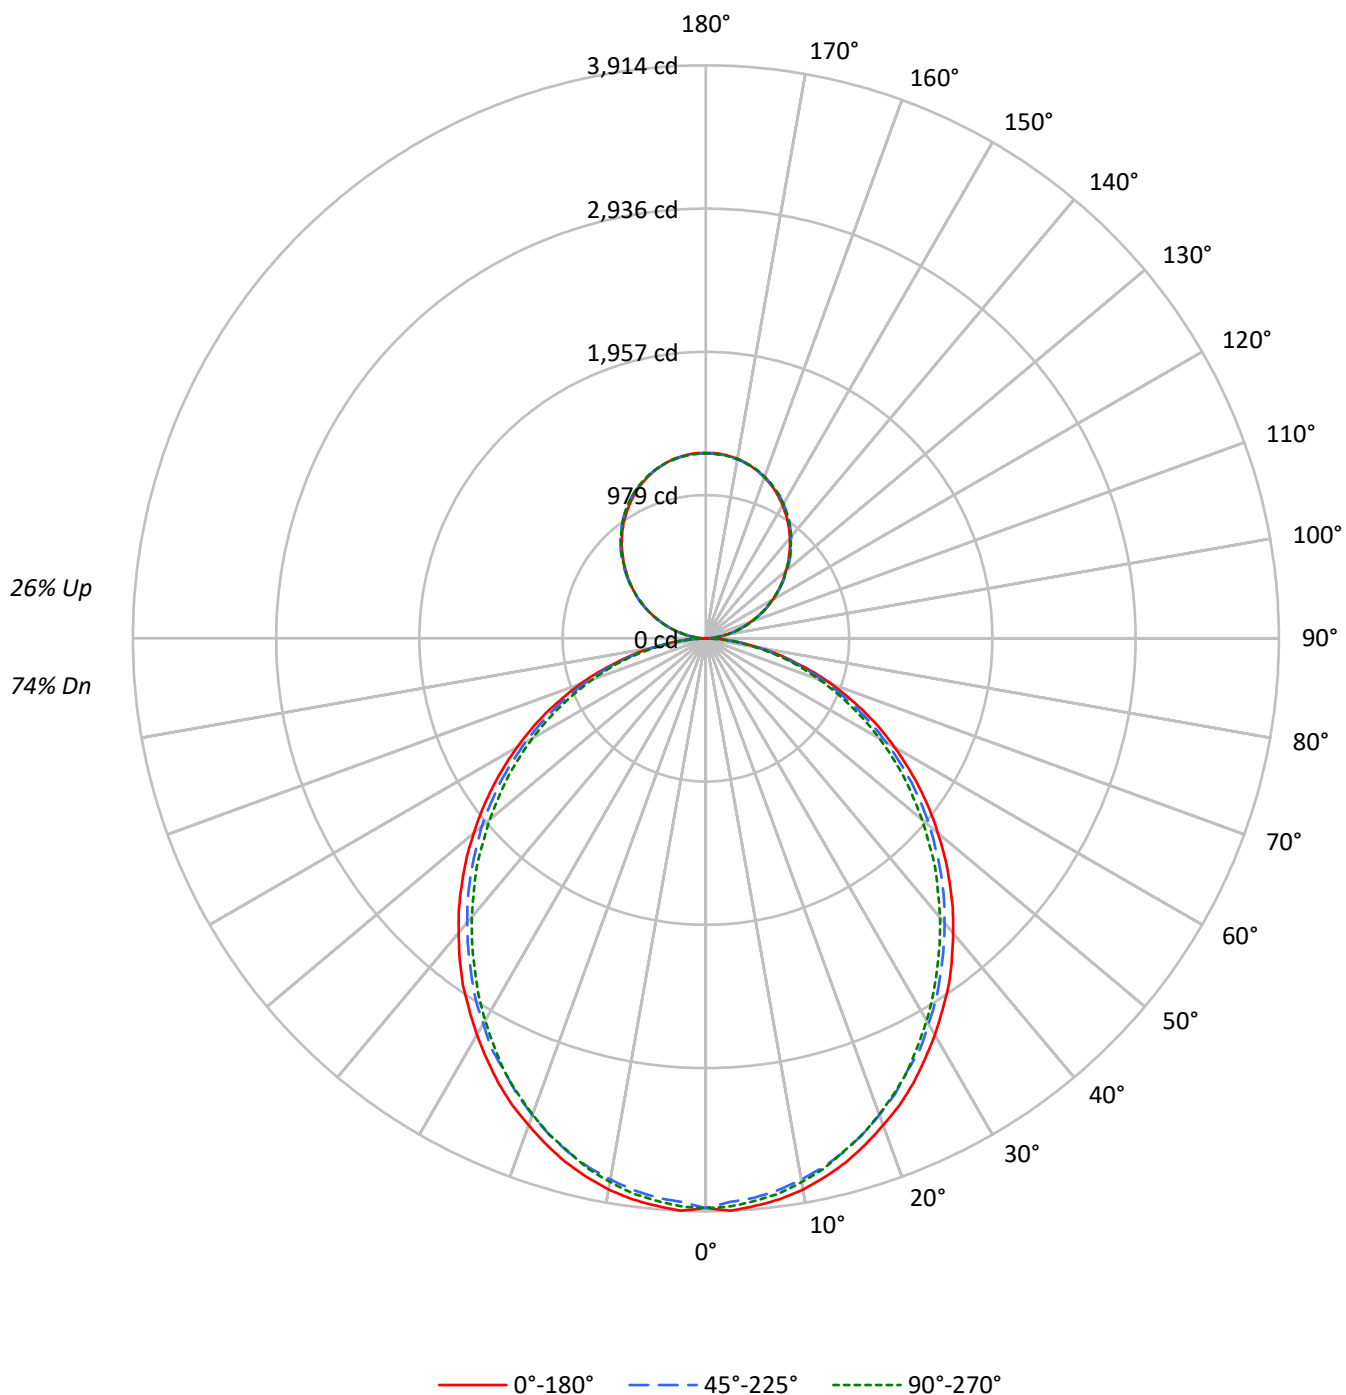

TEST NUMBER: P906556

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLFL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20
RC	80				70				50				30				10
RW	70	50	30	10	70	50	30	10	50	30	10		50	30	10		50
RCR																	
0	113	113	113	113	107	107	107	107	96	96	96		87	87	87		78
1	103	99	95	91	98	94	90	87	85	82	80		77	74	72		69
2	94	86	80	74	89	82	76	71	74	70	66		67	64	61		61
3	86	76	68	62	81	72	65	60	66	60	55		59	55	51		54
4	79	67	59	53	74	64	57	51	58	52	47		53	48	44		48
5	72	60	52	45	68	57	50	44	52	46	41		48	42	38		43
6	67	54	46	40	63	52	44	38	47	41	36		43	38	34		39
7	62	49	41	35	58	47	39	34	43	37	32		39	34	30		36
8	57	45	37	31	54	43	35	30	39	33	28		36	31	27		33
9	54	41	33	28	51	39	32	27	36	30	26		33	28	24		31
10	50	38	30	25	48	36	29	24	33	27	23		31	26	22		28

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4458	4458	4458
5°	4463	4393	4424
10°	4424	4331	4363
15°	4356	4257	4268
20°	4265	4155	4171
25°	4175	4034	4059
30°	4062	3920	3916
35°	3955	3787	3766
40°	3824	3653	3623
45°	3693	3518	3476
50°	3550	3376	3306
55°	3400	3212	3150
60°	3230	3017	2970
65°	3044	2816	2759
70°	2807	2569	2531
75°	2480	2274	2319
80°	2084	1897	1917
85°	1467	1258	1254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°

Vertical Angle: 45°

Luminance: 3693 cd/sqm

TEST NUMBER: P906556

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLFLL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	366.2	2.7
10°-20°	1030.4	7.7
20°-30°	1514.3	11.3
30°-40°	1758.8	13.1
40°-50°	1756.6	13.1
50°-60°	1531.7	11.4
60°-70°	1132.3	8.4
70°-80°	640.6	4.8
80°-90°	172.7	1.3
90°-100°	78.3	0.6
100°-110°	248.7	1.9
110°-120°	425.6	3.2
120°-130°	559.8	4.2
130°-140°	628.3	4.7
140°-150°	616.2	4.6
150°-160°	516.9	3.8
160°-170°	342.8	2.6
170°-180°	119.8	0.9
0°-30°	2911.0	21.7
0°-40°	4669.7	34.7
0°-60°	7958.0	59.2
0°-90°	9903.6	73.7
90°-120°	752.7	5.6
90°-150°	2556.9	19.0
90°-180°	3536.0	26.3
0°-180°	13440.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3891	3891	3891	3891	3891	
5°	3891	3876	3835	3865	3858	369
15°	3704	3682	3633	3648	3630	1043
25°	3352	3323	3259	3266	3259	1543
35°	2892	2855	2795	2772	2754	1806
45°	2354	2327	2271	2230	2215	1816
55°	1781	1759	1714	1669	1650	1592
65°	1201	1179	1141	1108	1089	1188
75°	628	621	602	580	588	671
85°	153	150	146	135	131	171
90°	1	14	37	35	36	13
95°	56	66	68	68	66	62
105°	230	233	235	237	237	242
115°	427	433	431	430	427	422
125°	621	631	628	624	623	555
135°	804	815	818	816	814	621
145°	976	983	989	990	986	610
155°	1116	1119	1122	1127	1124	513
165°	1214	1212	1212	1220	1215	342
175°	1263	1260	1257	1265	1259	120
180°	1265	1265	1265	1265	1265	

TEST NUMBER: P906556

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLFLL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3891.1	3891.1	3891.1	3891.1	3891.1
2.5°	3913.7	3895.0	3853.7	3891.1	3883.9
5°	3891.1	3876.4	3835.1	3864.9	3857.7
7.5°	3864.9	3842.6	3801.3	3831.5	3824.0
10°	3824.0	3797.8	3752.9	3782.7	3771.6
12.5°	3767.6	3745.4	3700.5	3719.2	3711.6
15°	3704.1	3681.9	3633.0	3648.1	3629.5
17.5°	3625.5	3603.3	3554.4	3573.1	3554.4
20°	3539.3	3517.1	3464.7	3475.8	3461.1
22.5°	3453.6	3419.9	3371.0	3371.0	3363.5
25°	3352.4	3322.6	3259.1	3266.2	3259.1
27.5°	3240.0	3213.8	3165.4	3154.3	3135.6
30°	3128.1	3097.9	3041.9	3030.8	3015.7
32.5°	3008.2	2986.0	2926.0	2903.4	2888.3
35°	2892.3	2855.0	2795.0	2772.4	2753.7
37.5°	2761.3	2727.5	2667.6	2641.4	2622.7
40°	2626.7	2596.5	2536.6	2503.3	2488.2
42.5°	2495.7	2465.5	2406.0	2368.3	2346.1
45°	2353.6	2327.4	2271.0	2230.1	2215.1
47.5°	2215.1	2188.9	2128.9	2087.6	2065.4
50°	2069.0	2050.3	1997.9	1945.5	1926.9
52.5°	1926.9	1900.7	1852.2	1811.0	1784.8
55°	1781.2	1758.6	1713.7	1668.8	1650.2
57.5°	1635.1	1616.4	1567.6	1522.8	1507.7
60°	1489.0	1474.3	1421.9	1380.6	1369.5
62.5°	1346.9	1320.7	1283.4	1246.1	1231.0
65°	1201.2	1178.6	1141.3	1107.5	1088.9
67.5°	1051.6	1032.5	999.2	973.0	957.9
70°	913.0	897.9	864.2	838.0	823.3
72.5°	770.9	755.8	737.2	711.0	699.8
75°	628.4	621.3	602.2	580.0	587.5
77.5°	501.4	486.3	478.7	467.6	456.5
80°	374.3	370.4	362.8	351.7	344.2
82.5°	254.5	254.5	250.9	235.8	235.8
85°	153.2	149.7	146.1	134.6	131.0
87.5°	67.5	59.9	52.4	41.3	37.3
90°	1.1	13.7	37.4	35.1	36.2
92.5°	23.6	32.0	33.2	34.3	34.3
95°	55.7	66.4	68.3	68.3	66.4
97.5°	92.7	102.6	106.8	106.8	106.8
100°	135.4	144.2	147.2	147.2	146.1
102.5°	180.4	186.9	191.1	192.2	191.1
105°	229.6	232.6	234.9	236.8	236.8
107.5°	278.4	283.0	283.0	283.7	278.4
110°	325.7	331.8	331.8	331.8	328.8

TEST NUMBER: P906556

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLFLL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	376.8	383.3	382.1	379.1	376.8
115°	427.1	433.3	431.3	430.2	427.1
117.5°	477.1	485.5	480.2	477.1	474.1
120°	527.5	535.8	527.5	527.5	524.0
122.5°	573.2	583.9	578.6	575.5	573.2
125°	621.3	630.8	627.8	624.3	623.2
127.5°	668.2	680.0	675.8	671.2	668.2
130°	712.0	725.8	723.9	721.6	717.4
132.5°	761.2	771.9	772.7	767.3	764.3
135°	803.6	815.4	817.7	816.5	813.5
137.5°	850.9	860.4	862.3	861.5	857.0
140°	892.4	902.0	907.3	907.3	903.1
142.5°	935.2	944.7	947.7	948.9	944.7
145°	975.6	983.2	989.3	990.5	986.3
147.5°	1011.8	1021.3	1025.9	1027.8	1023.6
150°	1049.2	1055.7	1059.9	1063.3	1059.9
152.5°	1082.4	1088.8	1094.2	1098.4	1094.2
155°	1115.5	1118.6	1122.0	1127.4	1123.9
157.5°	1144.2	1146.4	1148.3	1156.0	1150.6
160°	1169.7	1172.0	1173.1	1179.6	1175.0
162.5°	1193.3	1193.3	1194.5	1201.7	1196.4
165°	1213.6	1212.4	1212.4	1220.0	1214.7
167.5°	1231.9	1228.4	1228.4	1236.1	1230.7
170°	1245.6	1242.5	1241.4	1249.0	1242.5
172.5°	1255.1	1252.1	1250.9	1258.6	1252.1
175°	1262.8	1259.7	1257.4	1265.0	1258.6
177.5°	1267.0	1263.9	1261.6	1268.1	1261.6
180°	1265.0	1265.0	1265.0	1265.0	1265.0

TEST NUMBER: P906556

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLFLL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.38	15.50	15.10	16.25	17.13	13.93	15.06	14.66	15.80	16.69
	3H	16.05	17.06	16.79	17.82	18.74	15.56	16.57	16.30	17.33	18.25
	4H	16.65	17.60	17.41	18.37	19.30	16.16	17.11	16.91	17.87	18.80
	6H	17.06	17.94	17.83	18.71	19.66	16.56	17.44	17.33	18.21	19.16
	8H	17.17	18.01	17.95	18.80	19.75	16.67	17.51	17.45	18.30	19.25
	12H	17.23	18.03	18.01	18.81	19.79	16.72	17.52	17.50	18.30	19.28
4H	2H	14.87	15.82	15.63	16.58	17.51	14.51	15.47	15.27	16.23	17.16
	3H	16.75	17.55	17.52	18.35	19.29	16.34	17.14	17.11	17.94	18.89
	4H	17.47	18.20	18.26	19.00	19.97	17.05	17.77	17.83	18.57	19.55
	6H	18.00	18.62	18.80	19.45	20.43	17.57	18.19	18.37	19.02	20.00
	8H	18.15	18.74	18.96	19.56	20.55	17.71	18.30	18.52	19.12	20.11
	12H	18.23	18.76	19.06	19.60	20.60	17.79	18.31	18.61	19.15	20.16
8H	4H	17.69	18.27	18.49	19.09	20.09	17.31	17.89	18.12	18.71	19.71
	6H	18.32	18.81	19.16	19.67	20.67	17.94	18.42	18.77	19.28	20.28
	8H	18.54	18.97	19.39	19.83	20.84	18.15	18.58	19.00	19.44	20.45
	12H	18.68	19.06	19.53	19.91	20.98	18.27	18.65	19.12	19.50	20.57
12H	4H	17.68	18.21	18.51	19.05	20.05	17.31	17.84	18.14	18.68	19.68
	6H	18.35	18.78	19.20	19.64	20.66	17.98	18.41	18.83	19.27	20.28
	8H	18.60	18.98	19.45	19.83	20.90	18.22	18.60	19.07	19.45	20.52