

Cooper Lighting Solutions Photometric Lab
1121 Highway 74 South
Peachtree City, GA 30269



Scaled data based on original data using
LM-79-2019 Approved Method: Electrical and Photometric Measurements of Solid-
State Lighting Products

Test Report Prepared for
Cooper Lighting Solutions

Brand: NEO-RAY

Report Number: P906557

Luminaire Tested: DFN2DIP-SQ3F0-100D040US835-FLLONL

Issue Date: 11/21/2024

Test Information

Test Method: LM-79-2019
Report Number: P906557
REPORT IS A COMBINATION OF REPORTS P901393 AND P898289
Test Lab: INNOVATION CENTER
Issue Date: 11/21/2024
Manufacturer: COOPER LIGHTING SOLUTIONS
Product Line: NEO-RAY
Catalog Number: DFN2DIP-SQ3F0-100D040US835-FLLONL
Description: 3 foot, Square Define Geo, with Direct Frosted Lens, Indirect Open No Lens
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 13860.0 lumens
Efficiency: N/A
Efficacy: 107.6 lumens/watt
Spacing Criteria (0/90/45): 1.2 / 1.16 / 1.29
Luminous Opening: Rectangular w/ Sides (W: 3.06' x L: 3.06' x H: 0.1')
CIE Type: Semi-Direct

Input Watts (W): 128.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: 0.9781
Total Harmonic Distortion (THDi): 0.075
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 24 FT

TEST NUMBER: P906557
CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLONL

Luminous Intensity Polar Plot

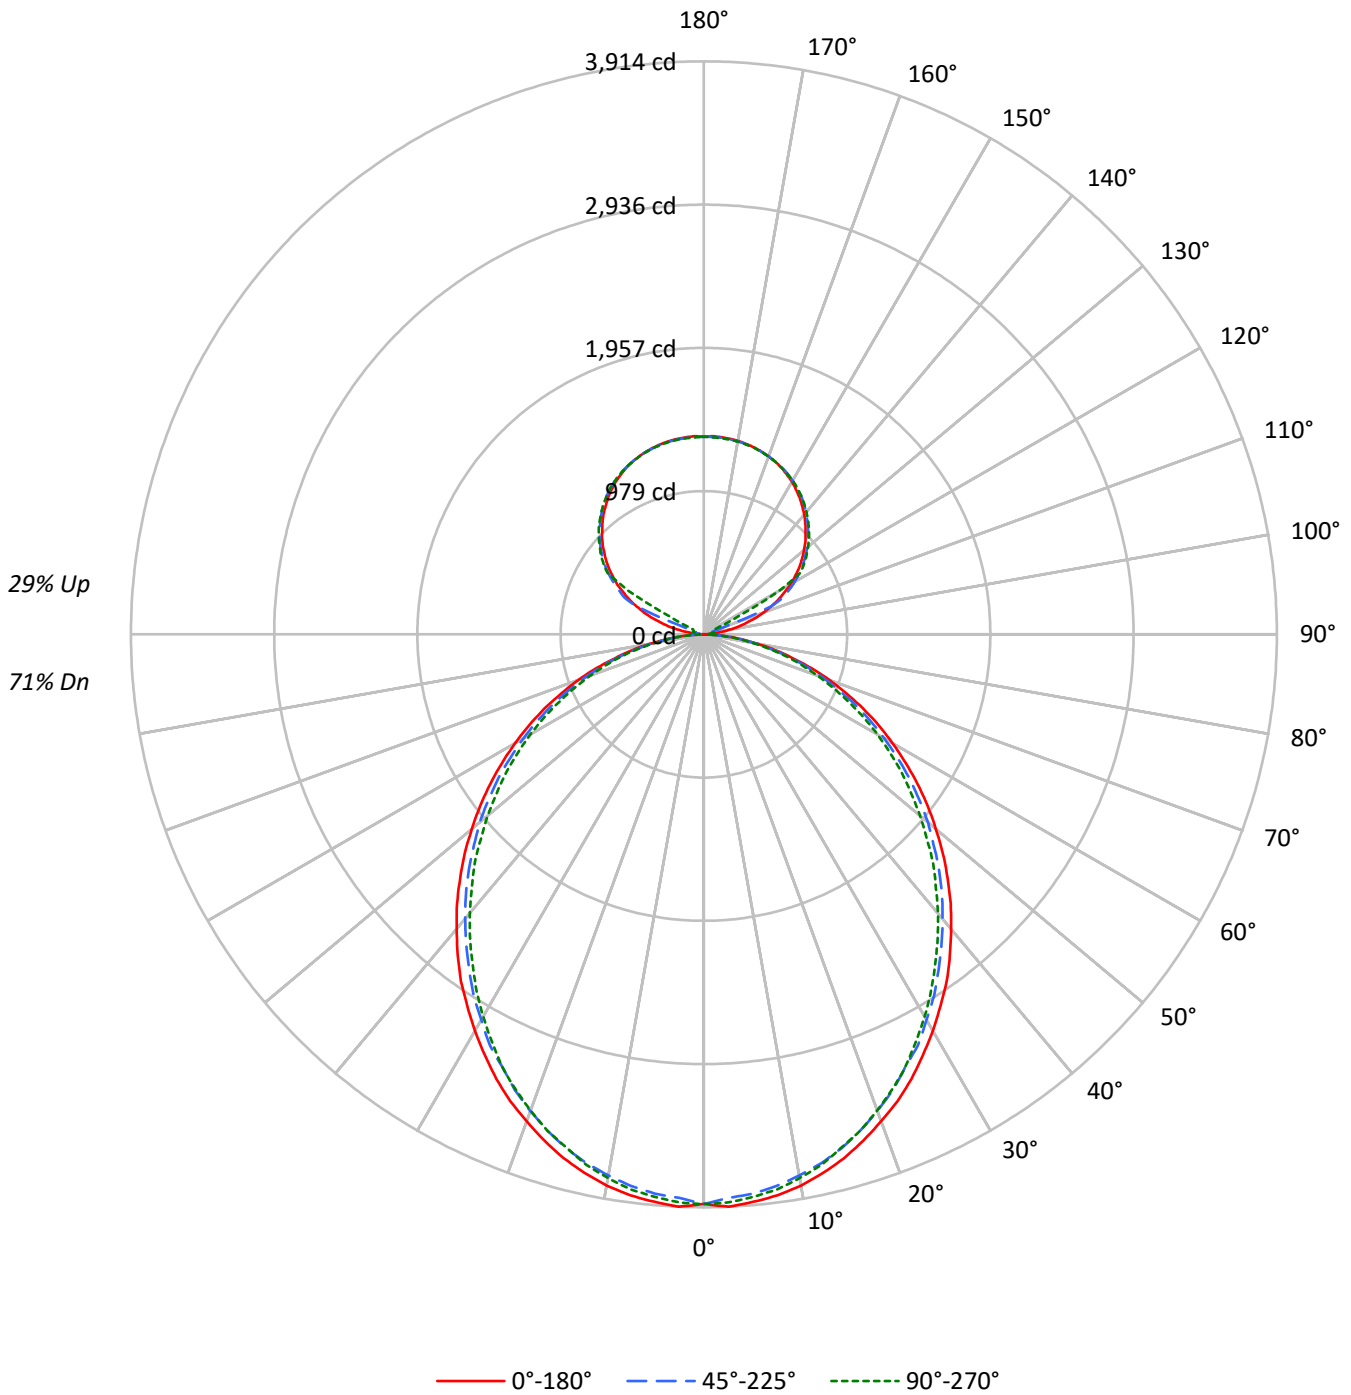



TEST NUMBER: P906557

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLONL

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	112	112	112	112	106	106	106	106	95	95	95	85	85	85	76	76	76	76	76	76	71
1	103	98	94	90	97	93	90	86	84	81	78	75	73	71	67	66	64	64	64	64	60
2	93	86	79	74	88	81	76	71	73	69	65	66	62	59	59	56	54	54	54	54	50
3	85	75	68	62	80	72	65	59	65	59	55	58	54	50	52	49	46	46	46	46	43
4	78	67	59	52	74	64	56	50	58	52	47	52	47	43	47	43	40	40	40	40	37
5	72	60	51	45	68	57	49	44	52	45	40	47	42	38	42	38	35	35	35	35	32
6	66	54	45	39	63	51	44	38	47	40	35	42	37	33	38	34	31	31	31	31	28
7	61	49	40	35	58	47	39	34	42	36	31	39	33	29	35	31	27	27	27	27	25
8	57	44	36	31	54	42	35	30	39	33	28	35	30	26	32	28	24	24	24	24	22
9	53	41	33	28	50	39	32	27	36	30	25	33	27	24	30	25	22	22	22	22	20
10	50	37	30	25	47	36	29	24	33	27	23	30	25	21	28	23	20	20	20	20	18

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	4458	4458	4458
5°	4463	4393	4424
10°	4424	4331	4363
15°	4356	4257	4268
20°	4265	4155	4171
25°	4175	4034	4059
30°	4062	3920	3916
35°	3955	3787	3766
40°	3824	3653	3623
45°	3693	3518	3476
50°	3550	3376	3306
55°	3400	3212	3150
60°	3230	3017	2970
65°	3044	2816	2759
70°	2807	2569	2531
75°	2480	2274	2319
80°	2084	1897	1917
85°	1467	1258	1254

MAXIMUM LUMINANCE 45°-90°:

Horizontal Angle: 0°
 Vertical Angle: 45°
 Luminance: 3693 cd/sqm



TEST NUMBER: P906557

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLONL

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	366.2	2.6
10°-20°	1030.4	7.4
20°-30°	1514.3	10.9
30°-40°	1758.8	12.7
40°-50°	1756.6	12.7
50°-60°	1531.7	11.1
60°-70°	1132.3	8.2
70°-80°	640.6	4.6
80°-90°	171.5	1.2
90°-100°	44.5	0.3
100°-110°	165.9	1.2
110°-120°	440.1	3.2
120°-130°	729.9	5.3
130°-140°	775.4	5.6
140°-150°	720.6	5.2
150°-160°	579.4	4.2
160°-170°	373.3	2.7
170°-180°	128.5	0.9
0°-30°	2911.0	21.0
0°-40°	4669.7	33.7
0°-60°	7958.0	57.4
0°-90°	9902.4	71.4
90°-120°	650.5	4.7
90°-150°	2876.4	20.8
90°-180°	3958.0	28.6
0°-180°	13860.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	3891	3891	3891	3891	3891	
5°	3891	3876	3835	3865	3858	369
15°	3704	3682	3633	3648	3630	1043
25°	3352	3323	3259	3266	3259	1543
35°	2892	2855	2795	2772	2754	1806
45°	2354	2327	2271	2230	2215	1816
55°	1781	1759	1714	1669	1650	1592
65°	1201	1179	1141	1108	1089	1188
75°	628	621	602	580	588	671
85°	153	150	146	135	131	171
90°	1	12	20	24	26	13
95°	63	31	38	43	42	75
105°	297	326	60	70	74	317
115°	562	578	603	150	80	553
125°	794	807	825	832	835	708
135°	983	998	1007	1017	1015	759
145°	1140	1139	1156	1162	1158	713
155°	1255	1246	1258	1264	1256	578
165°	1323	1317	1320	1326	1320	374
175°	1353	1346	1348	1355	1345	129
180°	1350	1350	1350	1350	1350	



TEST NUMBER: P906557

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLONL

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	3891.1	3891.1	3891.1	3891.1	3891.1
2.5°	3913.7	3895.0	3853.7	3891.1	3883.9
5°	3891.1	3876.4	3835.1	3864.9	3857.7
7.5°	3864.9	3842.6	3801.3	3831.5	3824.0
10°	3824.0	3797.8	3752.9	3782.7	3771.6
12.5°	3767.6	3745.4	3700.5	3719.2	3711.6
15°	3704.1	3681.9	3633.0	3648.1	3629.5
17.5°	3625.5	3603.3	3554.4	3573.1	3554.4
20°	3539.3	3517.1	3464.7	3475.8	3461.1
22.5°	3453.6	3419.9	3371.0	3371.0	3363.5
25°	3352.4	3322.6	3259.1	3266.2	3259.1
27.5°	3240.0	3213.8	3165.4	3154.3	3135.6
30°	3128.1	3097.9	3041.9	3030.8	3015.7
32.5°	3008.2	2986.0	2926.0	2903.4	2888.3
35°	2892.3	2855.0	2795.0	2772.4	2753.7
37.5°	2761.3	2727.5	2667.6	2641.4	2622.7
40°	2626.7	2596.5	2536.6	2503.3	2488.2
42.5°	2495.7	2465.5	2406.0	2368.3	2346.1
45°	2353.6	2327.4	2271.0	2230.1	2215.1
47.5°	2215.1	2188.9	2128.9	2087.6	2065.4
50°	2069.0	2050.3	1997.9	1945.5	1926.9
52.5°	1926.9	1900.7	1852.2	1811.0	1784.8
55°	1781.2	1758.6	1713.7	1668.8	1650.2
57.5°	1635.1	1616.4	1567.6	1522.8	1507.7
60°	1489.0	1474.3	1421.9	1380.6	1369.5
62.5°	1346.9	1320.7	1283.4	1246.1	1231.0
65°	1201.2	1178.6	1141.3	1107.5	1088.9
67.5°	1051.6	1032.5	999.2	973.0	957.9
70°	913.0	897.9	864.2	838.0	823.3
72.5°	770.9	755.8	737.2	711.0	699.8
75°	628.4	621.3	602.2	580.0	587.5
77.5°	501.4	486.3	478.7	467.6	456.5
80°	374.3	370.4	362.8	351.7	344.2
82.5°	254.5	254.5	250.9	235.8	235.8
85°	153.2	149.7	146.1	134.6	131.0
87.5°	67.5	59.9	52.4	41.3	37.3
90°	0.9	11.7	19.5	24.5	26.3
92.5°	24.5	20.5	23.4	25.4	26.3
95°	63.4	31.2	38.0	43.0	42.0
97.5°	114.3	34.2	49.8	52.8	53.7
100°	172.9	39.1	55.7	63.4	65.4
102.5°	237.3	235.5	57.6	68.3	71.3
105°	296.9	326.3	59.6	70.3	74.2
107.5°	366.3	390.7	61.6	72.3	76.2
110°	432.8	453.2	171.0	73.3	77.1



TEST NUMBER: P906557

CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLONL

CANDELA DISTRIBUTION (continued):

	0°	22.5°	45°	67.5°	90°
112.5°	495.3	512.8	496.2	75.2	78.2
115°	561.6	578.2	602.7	150.4	80.2
117.5°	619.3	638.8	655.5	515.7	259.8
120°	683.8	698.4	716.0	727.8	595.9
122.5°	738.4	754.1	773.7	779.5	780.5
125°	794.1	806.9	825.4	832.3	835.2
127.5°	844.9	858.6	873.3	883.1	884.0
130°	892.8	908.5	919.1	929.9	929.0
132.5°	941.6	954.4	965.1	973.9	973.0
135°	982.7	998.4	1007.1	1016.9	1015.0
137.5°	1025.6	1037.3	1047.2	1056.9	1054.0
140°	1067.6	1075.5	1086.2	1095.0	1090.1
142.5°	1102.9	1109.7	1122.4	1130.1	1125.3
145°	1140.0	1139.0	1155.5	1162.4	1157.5
147.5°	1172.1	1169.2	1185.8	1190.7	1186.9
150°	1203.4	1196.6	1212.3	1218.1	1213.2
152.5°	1229.8	1222.0	1236.6	1242.5	1235.7
155°	1255.2	1246.5	1258.2	1264.0	1256.2
157.5°	1275.7	1267.9	1276.8	1283.6	1275.7
160°	1293.3	1287.4	1293.3	1299.1	1292.3
162.5°	1308.9	1303.1	1308.0	1314.8	1306.0
165°	1322.6	1316.8	1319.7	1326.5	1319.7
167.5°	1333.4	1327.4	1330.5	1337.3	1328.5
170°	1342.2	1336.3	1338.2	1345.1	1336.3
172.5°	1348.0	1342.2	1344.2	1351.0	1342.2
175°	1352.8	1346.0	1348.0	1354.8	1345.1
177.5°	1354.8	1348.0	1349.0	1355.9	1347.1
180°	1350.0	1350.0	1350.0	1350.0	1350.0



TEST NUMBER: P906557
 CATALOG NUMBER: DFN2DIP-SQ3F0-100D040US835-FLLONL

CIE UGR TABLE:

Reflectances:											
Ceiling		0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Wall		0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
Reference plane		0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions		Viewed crosswise					Viewed endwise				
X=2H	Y=2H	14.21	15.30	14.96	16.07	17.00	13.77	14.86	14.51	15.63	16.56
	3H	15.88	16.87	16.65	17.65	18.61	15.39	16.38	16.16	17.16	18.12
	4H	16.48	17.41	17.26	18.20	19.17	15.98	16.91	16.76	17.70	18.67
	6H	16.89	17.74	17.68	18.54	19.53	16.39	17.24	17.18	18.04	19.02
	8H	17.00	17.81	17.80	18.63	19.61	16.49	17.31	17.30	18.13	19.11
	12H	17.05	17.83	17.86	18.64	19.65	16.54	17.32	17.35	18.13	19.14
4H	2H	14.70	15.62	15.48	16.41	17.38	14.34	15.27	15.12	16.06	17.03
	3H	16.58	17.35	17.37	18.17	19.16	16.17	16.94	16.96	17.77	18.75
	4H	17.30	18.00	18.11	18.82	19.84	16.87	17.58	17.68	18.40	19.42
	6H	17.82	18.43	18.65	19.28	20.30	17.39	18.00	18.22	18.85	19.87
	8H	17.97	18.54	18.80	19.39	20.42	17.54	18.11	18.37	18.95	19.98
	12H	18.06	18.57	18.91	19.43	20.47	17.61	18.12	18.46	18.98	20.02
8H	4H	17.51	18.08	18.34	18.92	19.95	17.13	17.70	17.96	18.54	19.58
	6H	18.14	18.62	19.00	19.50	20.53	17.76	18.23	18.62	19.12	20.15
	8H	18.36	18.78	19.23	19.66	20.71	17.97	18.39	18.84	19.27	20.32
	12H	18.50	18.87	19.37	19.74	20.85	18.09	18.46	18.96	19.33	20.44
12H	4H	17.50	18.02	18.35	18.88	19.92	17.13	17.65	17.99	18.51	19.55
	6H	18.17	18.59	19.04	19.47	20.52	17.80	18.22	18.67	19.10	20.15
	8H	18.42	18.79	19.29	19.66	20.77	18.04	18.41	18.91	19.28	20.39